

PLANNING & ZONING CASE NO.

PLANNING & ZONING FEE

PLATTING APPLICATION

MASTER PLAT PRELIMINARY PLAT FINAL PLAT REPLAT

AMENDING OR MINOR PLAT PLAT REINSTATEMENT REQUEST

SITE PLAN APPLICATION

SITE PLAN

AMENDED SITE PLAN/ELEVATIONS/LANDSCAPING

ZONING APPLICATION

ZONING CHANGE SPECIFIC USE PERMIT PD DEVELOPMENT PLAN

OTHER APPLICATION

TREE REMOVAL

VARIANCE REQUEST/SPECIAL EXCEPTIONS

RECORD OF RECOMMENDATIONS, VOTING RECORDS, AND CONDITIONS OF APPROVAL

ARCHITECTURE REVIEW BOARD	CITY COUNCIL READING #2
PLANNING AND ZONING COMMISSION	CONDITIONS OF APPROVAL
CITY COUNCIL READING #1	NOTES





DEVELOPMENT APPLICATION

City of Rockwall
Planning and Zoning Department
385 S. Goliad Street
Rockwall, Texas 75087

Ì	PLANNING & ZONING CASE NO.
	<u>NOTE:</u> THE APPLICATION IS NOT CONSIDERED ACCEPTED BY THE CITY UNTIL THE PLANNING DIRECTOR AND CITY ENGINEER HAVE SIGNED BELOW.
	DIRECTOR OF PLANNING:
	CITY ENGINEER:

	Rockwall, Texas 75067	CITYE	NGINEER:
PLEASE CHECK THE	APPROPRIATE BOX BELOW TO INDICATE THE TYPE O	F DEVELOPMENT REQ	UEST [SELECT ONLY ONE BOX];
☐ PRELIMINARY F ☐ FINAL PLAT (\$3 ☐ REPLAT (\$300.0 ☐ AMENDING OR ☐ PLAT REINSTAT SITE PLAN APPLIC ☐ SITE PLAN (\$25	(\$100.00 + \$15.00 ACRE) 1 PLAT (\$200.00 + \$15.00 ACRE) 1 00.00 + \$20.00 ACRE) 1 10 + \$20.00 ACRE) 1 MINOR PLAT (\$150.00) FEMENT REQUEST (\$100.00)	☐ SPECIFIC USE ☐ PD DEVELOP! OTHER APPLICA ☐ TREE REMOV. ☐ VARIANCE RE NOTES: : IN DETERMINING THE PER ACRE AMOUNT. FI 2: A \$1,000.00 FEE WI	NGE (\$200.00 + \$15.00 ACRE) 1 E PERMIT (\$200.00 + \$15.00 ACRE) 1 8 2 MENT PLANS (\$200.00 + \$15.00 ACRE) 1 ITION FEES:
PROPERTY INFO	DRMATION [PLEASE PRINT]		
ADDRESS	BUILDING 2 , 2014-A, PORT	TOFINO DR	, ROCKWALL TX 75032
SUBDIVISION	WATERS EDGE AT LAKE		
GENERAL LOCATION	SUMMER LEE AND POI	RTOFINO S.	PIVE
ZONING, SITE PI	AN AND PLATTING INFORMATION [PLEASI	E PRINT]	
CURRENT ZONING	PD -22	CURRENT USE	CONDOMINIUMS
PROPOSED ZONING		PROPOSED USE	COMBOMINIUMS.
ACREAGE	6.5995 LOTS [CURRENT]	85	LOTS [PROPOSED] 85
REGARD TO ITS A	DPLATS: BY CHECKING THIS BOX YOU ACKNOWLEDGE TH APPROVAL PROCESS, AND FAILURE TO ADDRESS ANY OF S ENIAL OF YOUR CASE.	HAT DUE TO THE PASSA STAFF'S COMMENTS BY T	GE OF <u>HB3167</u> THE CITY NO LONGER HAS FLEXIBILITY WITH THE DATE PROVIDED ON THE DEVELOPMENT CALENDAR WILL
OWNER/APPLIC	ANT/AGENT INFORMATION [PLEASE PRINT/CHI	ECK THE PRIMARY CONT.	ACT/ORIGINAL SIGNATURES ARE REQUIRED]
✓ OWNER	PLUTUS 21 DEUELOPMENT.	✓ □ APPLICANT	
CONTACT PERSON	DANIYAL AWAN	CONTACT PERSON	
ADDRESS	11455 NEWKIRK ST	ADDRESS	
OITV OTATE B 710	# 1405	CITY, STATE & ZIP	
CITY, STATE & ZIP PHONE	DAUAS TX 75229	PHONE	
	469 853 6007 dm @ Plutus 21 · dev	E-MAIL	
		_ 17/7 (IL	
BEFORE ME, THE UNDER	CATION [required] RSIGNED AUTHORITY, ON THIS DAY PERSONALLY APPEAREI ON ON THIS APPLICATION TO BE TRUE AND CERTIFIED THE	Daniyal A FOLLOWING:	[OWNER] THE UNDERSIGNED, WHO
B 100 + 00 AJGUST NFORMATION CONTAINE SUBMITTED IN CONJUNCT	TO COVER THE COST OF THIS APPLICATION, HA 20 23 BY SIGNING THIS APPLICATION, I AGRE D WITHIN THIS APPLICATION TO THE PUBLIC. THE CITY IS TON WITH THIS APPLICATION, IF SUCH REPRODUCTION IS ASSO	S BEEN PAID TO THE CITY (E THAT THE CITY OF ROC ALSO AUTHORIZED AND	CKWALL (I.E. "CITY") IS AUTHORIZED AND PERMITTED TO PROVIDE PERMITTED TO REPRODUCE ANY COPYRIGHTED INFORMATION
GIVEN UNDER MY HAND	AND SEAL OF OFFICE ON THIS THE 18+ DAY OF AUG	just , 2023	Comm. Expires 03-02-2026 Notary ID 133621400
NOTABLY BUTTON	OWNER'S SIGNATURE		·illin.
NUTARY PUBLIC IN AND	FOR THE STATE OF TEXAS	112 Cheistine ben	mingh MY COMMISSION EXPIRES 3.2-2626

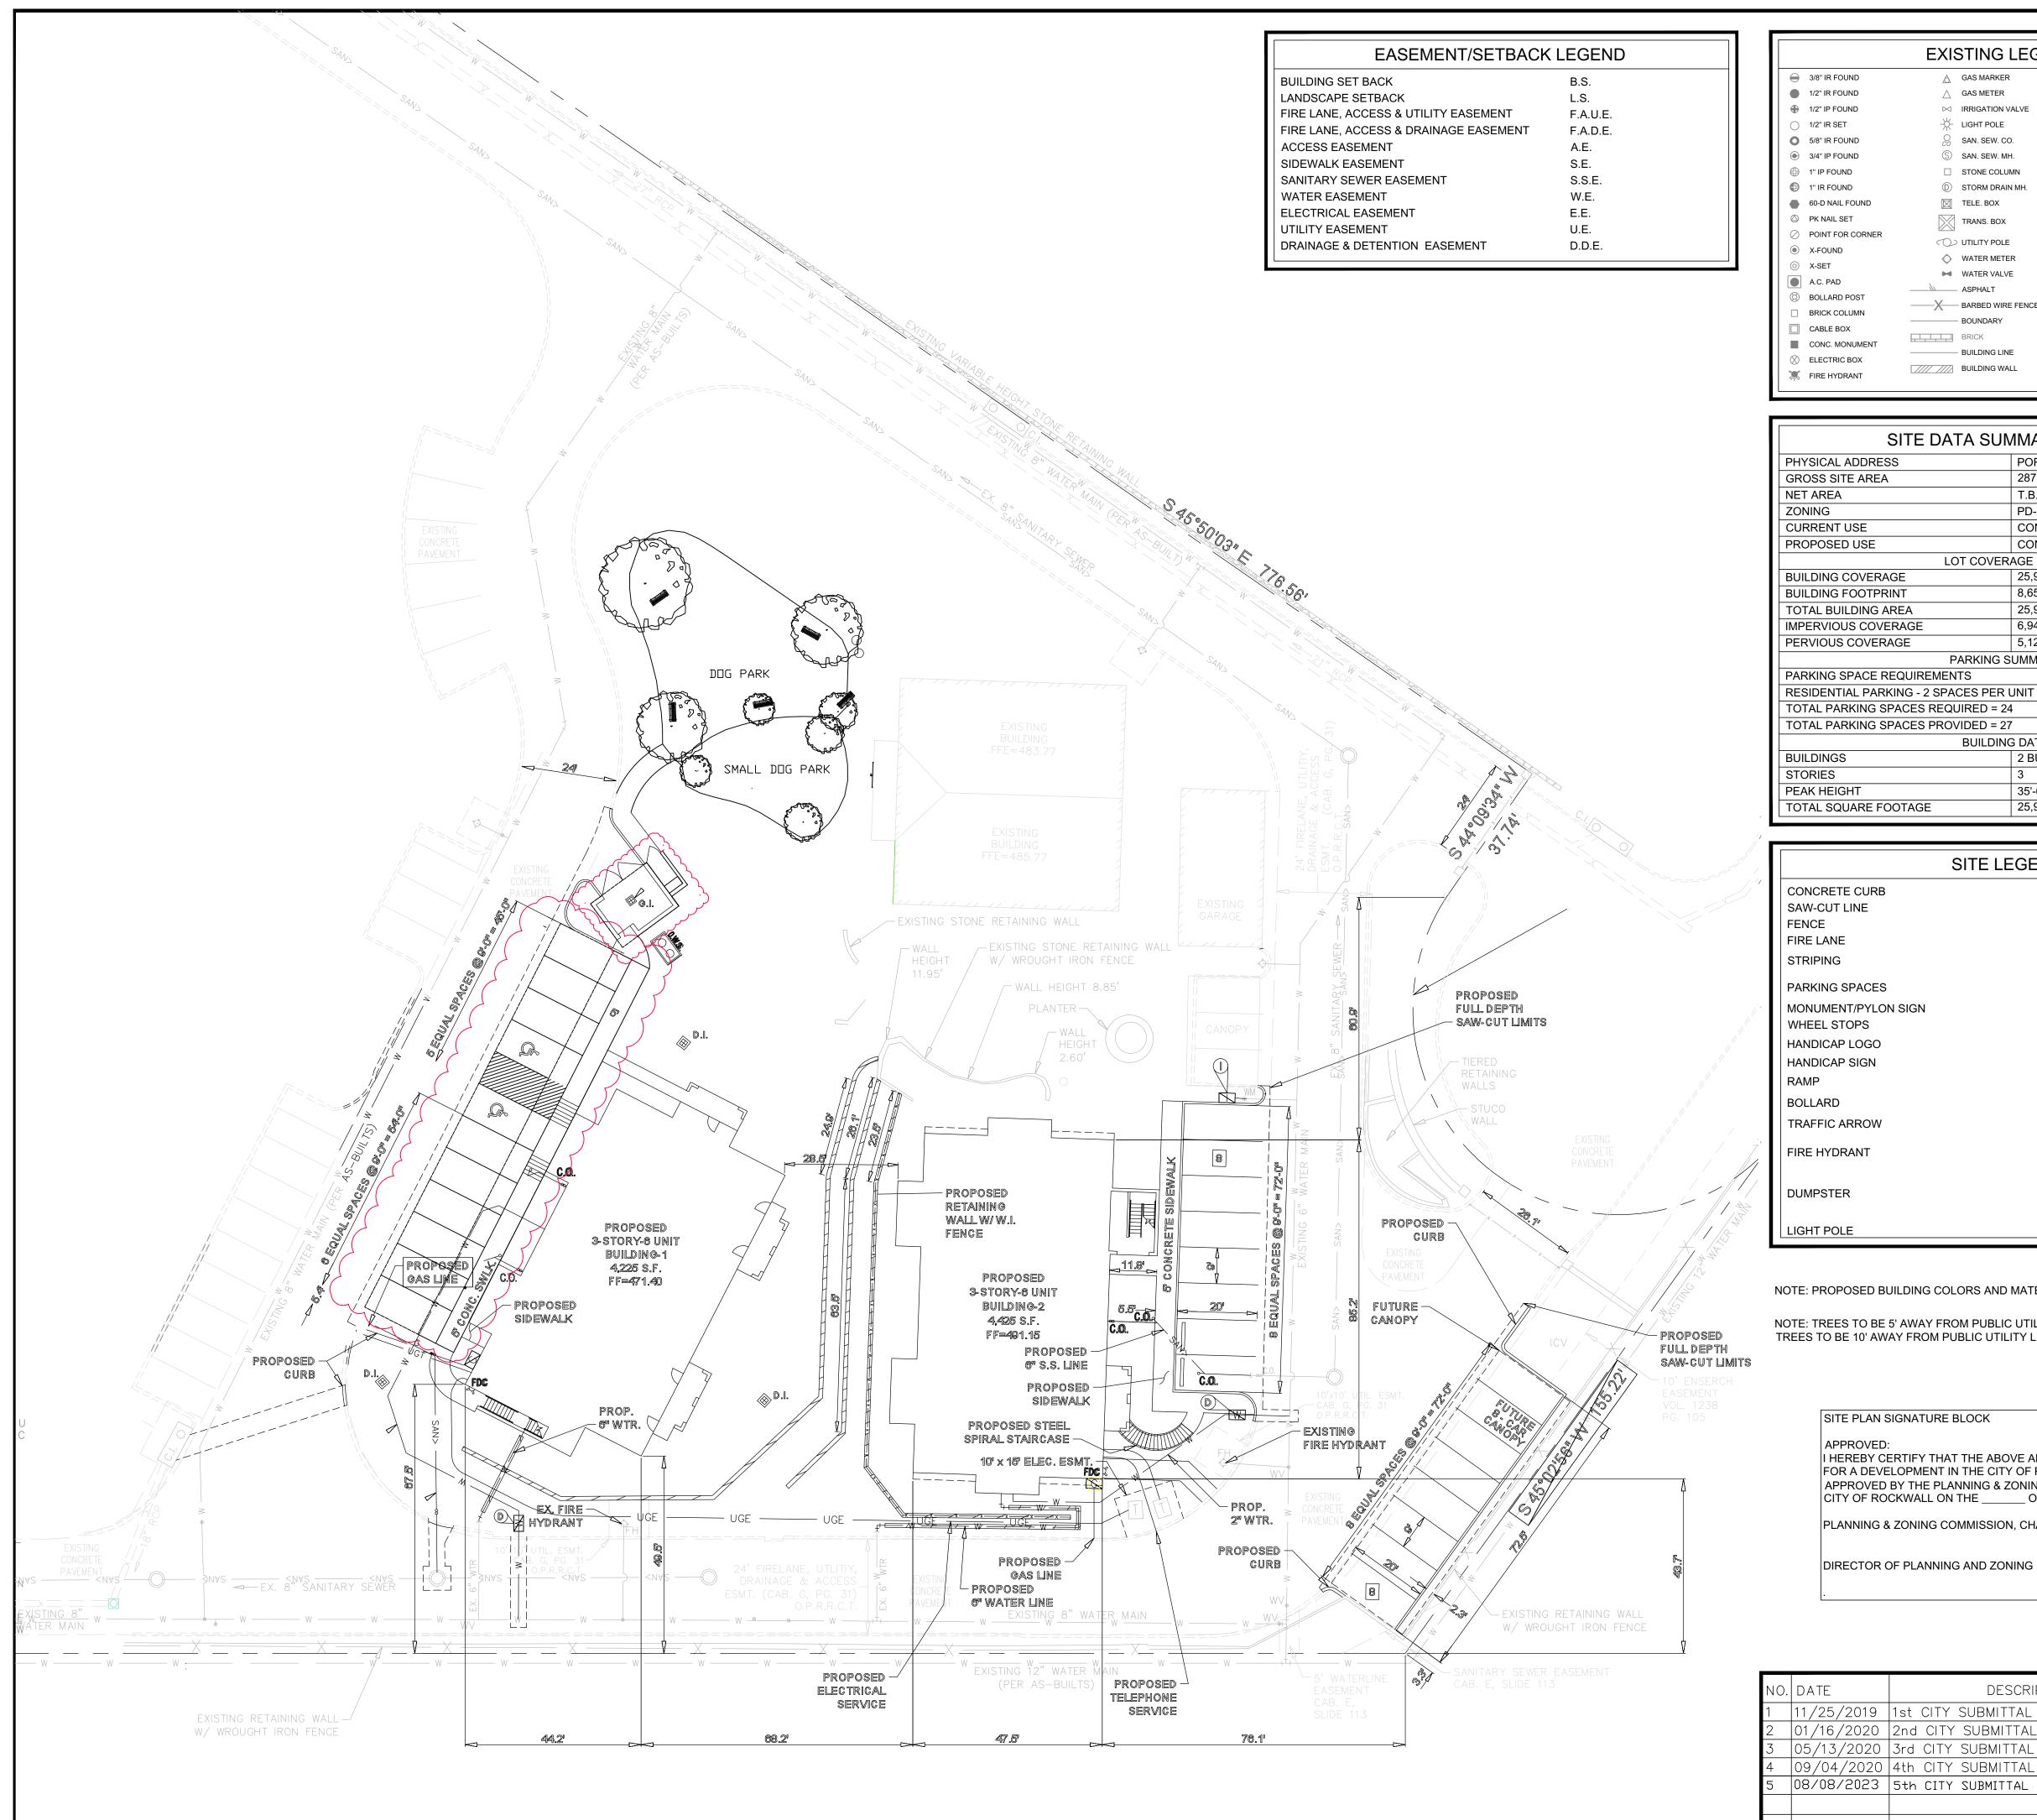

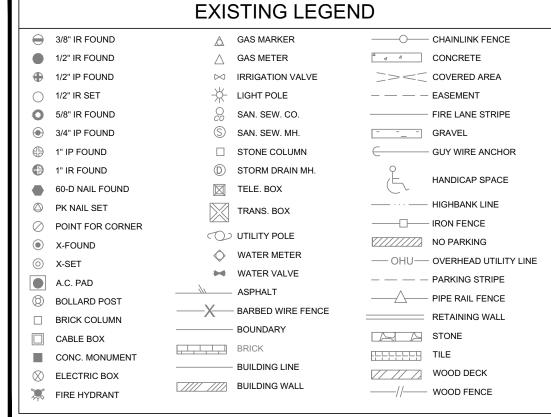

SITE DATA SUMMARY TABLE						
PHYSICAL ADDRESS	PORTOFINO DRIVE					
GROSS SITE AREA	287,476 S.F. / 6.60 ACRES					
NET AREA	T.B.D.					
ZONING	PD-22					
CURRENT USE	CONDOMINIMUMS					
PROPOSED USE	CONDOMINIMUMS					
LOT	COVERAGE DATA					
BUILDING COVERAGE	25,950 S.F.					
BUILDING FOOTPRINT	8,650 S.F.					
TOTAL BUILDING AREA	25,950 S.F.					
IMPERVIOUS COVERAGE	6,946 S.F.					
PERVIOUS COVERAGE	5,127 S.F.					
PARKING SUMMARY						
PARKING SPACE REQUIREMENTS						
RESIDENTIAL PARKING - 2 SPACE	S PER UNIT					
TOTAL PARKING SPACES REQUIR	RED = 24					
TOTAL PARKING SPACES PROVID	DED = 27					
В	UILDING DATA					
BUILDINGS	2 BUILDINGS & 1 GARAGE					
STORIES	3					
PEAK HEIGHT	35'-0"					
TOTAL SQUARE FOOTAGE	25,950 S.F.					

SI	TE LEGEND
CONCRETE CURB	
SAW-CUT LINE	
FENCE	X
FIRE LANE	
STRIPING	
PARKING SPACES	9
MONUMENT/PYLON SIGN	<u> </u>
WHEEL STOPS	
HANDICAP LOGO	<u> </u>
HANDICAP SIGN	
RAMP	00000 00000 00000
BOLLARD	•
TRAFFIC ARROW	→
FIRE HYDRANT	
DUMPSTER	
LIGHT POLE	

NOTE: PROPOSED BUILDING COLORS AND MATERIALS TO MATCH EXISTING BUILDINGS.

NOTE: TREES TO BE 5' AWAY FROM PUBLIC UTILITY LINES LESS THAN 10". TREES TO BE 10' AWAY FROM PUBLIC UTILITY LINES THAT ARE 10" OR GREATER.


SITE PLAN SIGNATURE BLOCK I HEREBY CERTIFY THAT THE ABOVE AND FOREGOING SITE PLAN FOR A DEVELOPMENT IN THE CITY OF ROCKWALL, TEXAS, WAS APPROVED BY THE PLANNING & ZONING COMMISSION OF THE CITY OF ROCKWALL ON THE _____ OF _____, 2020. PLANNING & ZONING COMMISSION, CHAIRMAN


DESCRIPTION


KARTAVYA S. PATEL

97534

DIRECTOR OF PLANNING AND ZONING





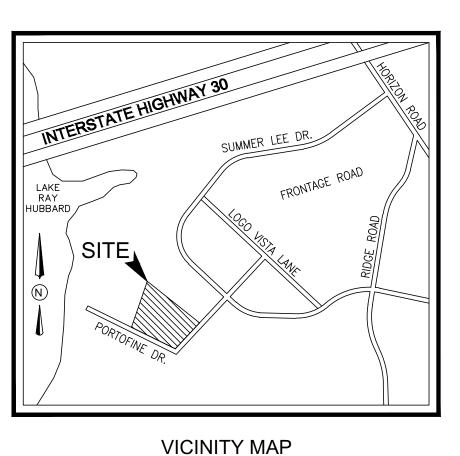

N.T.S.

GENERAL NOTES

- 1. ALL CONSTRUCTION SHALL BE IN STRICT ACCORDANCE WITH THE STANDARDS OF THE CITY OF ROCKWALL.
- 2. A PERMIT IS REQUIRED TO CUT A CITY STREET OR WORK WITHIN THE RIGHT-OF-WAY. THE PERMIT IS ISSUED BY THE PUBLIC WORKS DEPARTMENT.
- 3. THE LOCATION OF UNDERGROUND UTILITIES INDICATED ON THE PLANS IS TAKEN FROM PUBLIC RECORDS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO MAKE ARRANGEMENTS WITH THE OWNERS OF SUCH UNDERGROUND UTILITIES PRIOR TO WORKING IN THE AREA TO CONFIRM THEIR EXACT LOCATION AND TO DETERMINE WHETHER ANY ADDITIONAL UTILITIES OTHER THAN THOSE SHOWN ON THE PLANS MAY BE PRESENT. THE CONTRACTOR SHALL PRESERVE AND PROTECT ALL UNDERGROUND UTILITIES. IF EXISTING UNDERGROUND UTILITIES ARE DAMAGED, THE CONTRACTOR WILL BE RESPONSIBLE FOR THE COST OF REPAIRING THE UTILITY.
- 4. WHERE EXISTING UTILITIES OR SERVICE LINES ARE CUT, BROKEN OR DAMAGED, THE CONTRACTOR SHALL REPLACE OR REPAIR THE UTILITIES OR SERVICE LINES WITH THE SAME TYPE OF ORIGINAL MATERIAL AND CONSTRUCTION, OR BETTER, UNLESS OTHERWISE SHOWN OR NOTED ON THE PLANS, AT HIS OWN COST AND EXPENSE. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER AT ONCE OF ANY CONFLICTS IN GRADES AND ALIGNMENT.
- 5. ALL EXCAVATIONS, TRENCHING AND SHORING OPERATIONS SHALL COMPLY WITH THE REQUIREMENTS OF THE U. S. DEPARTMENT OF LABOR, OSHA, "CONST. SAFETY AND HEALTH REGULATIONS.", VOL. 29, SUBPART P. PG. 128 - 137, AND ANY AMENDMENTS THERETO.
- 6. ADEQUATE MEASURES SHALL BE TAKEN TO PREVENT EROSION. IN THE EVENT THAT SIGNIFICANT EROSION OCCURS AS A RESULT OF CONSTRUCTION THE CONTRACTOR SHALL RESTORE THE ERODED AREA TO ORIGINAL CONDITION OR BETTER.
- 7. THE CONTRACTOR SHALL RESTORE ALL AREAS DISTURBED BY CONSTRUCTION TO ORIGINAL CONDITION OR BETTER. RESTORED AREAS INCLUDE, BUT ARE NOT LIMITED TO TRENCH BACKFILL, SIDE SLOPES, FENCES, CULVERT PIPES, DRAINAGE DITCHES, DRIVEWAYS, PRIVATE YARDS AND ROADWAYS.
- 8. ANY CHANGES NEEDED AFTER CONSTRUCTION PLANS HAVE BEEN RELEASED, SHALL BE APPROVED BY THE CITY ENGINEER. THESE CHANGES MUST BE RECEIVED IN WRITING FROM THE DESIGN ENGINEER. THE DIRECTOR OF PUBLIC WORKS SHALL APPROVE ANY DEVIATIONS FROM STATE REGULATIONS.
- 9. THE CONTRACTOR SHALL PROVIDE "RED LINED" MARKED PRINTS TO THE ENGINEER PRIOR TO FINAL INSPECTION INDICATING ALL CONSTRUCTION WHICH DEVIATED FROM THE PLANS OR WAS CONSTRUCTED IN ADDITION TO THAT INDICATED ON THE PLANS.

WATER METER & SANITARY SEWER SCHEDULE									
ID	ID TYPE SIZE NO. SAN. SEW.								
D	DOM.	1 1/2"	2	6"					
I IRR. 1" 1 N/A									

ı	
	SP2019-049
	SITE PLAN
	WATER'S EDGE AT LAKE RAY HUBBARD
	PORTOFINO DRIVE
	CITY OF ROCKWALL
	ROCKWALL COUNTY, TEXAS
	I FIANGLE



		,			,,
Plann	<i>Management</i>				
DESIGN	DRAWN	DATE	SCALE	PROJECT NO.	SHEET NO.
KP	MLM	11/7/2019	SEE SCALE BAR	040-19	2
	S				

STUCCO TO MATCH EXISTING Sheet metal canopy Mediterranean style to match existing cover for electrical supply and meter base

WEST ELEVATION

100% MASONRY 9% STONE 91% STUCCO

STUCCO SILL

- STONE WATER TABLE

- COMPLETE THE SYSTEM.
- 2. IT IS THE SUBCONTRACTOR'S RESPONSIBILITY TO REVIEW THE DOCUMENTS AND INCLUDE ALL NECESSARY ITEMS TO PROVIDE A COMPLETE OPERATIONAL SYSTEM.
- 3. ANY DISCREPANCIES NOTED BY THE SUBCONTRACTOR SHALL BE BROUGHT TO THE ATTENTIONS OF THE ARCHITECT (IN WRITING) BEFORE BIDDING THIS PROJECT.
- 4. AFTER BIDS ARE TURNED IN, THE SUBCONTRACTOR SHALL COMPLETE THE SYSTEMS AT NO ADDITIONAL COST.
- 5. PLUMBING, MECHANICAL, AND ELECTRICAL SUBCONTRACTORS ARE RESPONSIBLE FOR COORDINATING ALL COMPONENTS TO INSURE COMPLETE AND WORKING SYSTEMS EACH SUBCONTRACTOR SHALL REVIEW ALL DRAWINGS FOR COMPLIANCE.
- DETERMINE WHICH TRADE SHALL PROVIDE

OWNER PLUTUS21 DEVELOPMENT 6116 N. CENTRAL EXPWY #700 DALLAS, TEXAS 75206

CASE #SP2020-000

© COPYRIGHT 2019 MERSHAWN ARCHITECTS, INC. NO PRINTING OR COPING IS ALLOWED WITHOUT PERMISSION FROM MERSHAWN.

6. THE ARCHITECT WILL BE RESPONSIBLE TO AND INSTALL ANY COMPONENTS MISSED FOR WORKING SYSTEMS AS NEEDED.

Project No.: Designed: GW Drawn: GW Checked: WM SHEET

3/16" = 1'-0"


04/21/2023

Scale:



SOUTH ELEVATION

100% MASONRY 10% STONE 90% STUCCO

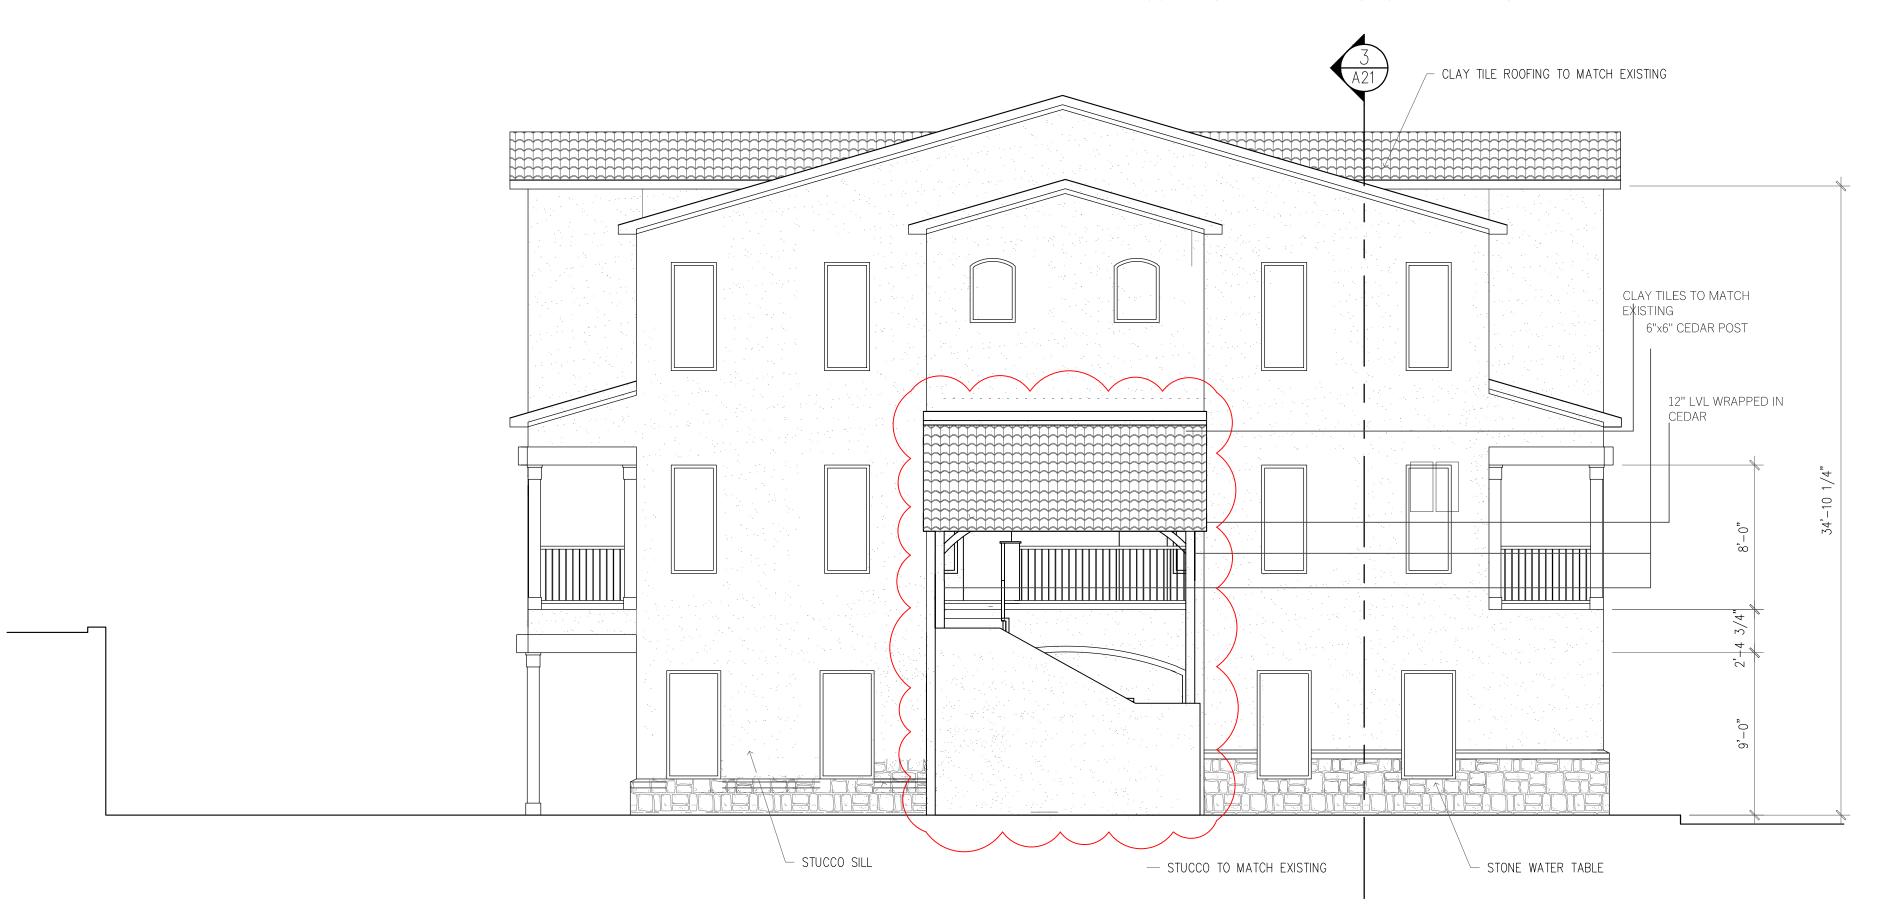

EAST ELEVATION 100% MASONRY 9% STONE 91% STUCCO NOTE: ALL NEW BUILDING ELEVATIONS SHALL MATCH COLORS TO THE EXISTING SURROUNDING BUILDINGS. THIS BUILDING HAS SIX INDIVIDUAL LIVING UNITS.

PRICING & CONSTRUCTION GENERAL NOTES:

THESE DRAWINGS ARE DIAGRAMMATIC IN NATURE AND ARE NOT INTENDED TO INDICATE EACH AND EVERY FITTING, OFFSET, OR OTHER APPURTENANCE NECESSARY TO

COMPLETE THE SYSTEM.


- 2. IT IS THE SUBCONTRACTOR'S RESPONSIBILITY TO REVIEW THE DOCUMENTS AND INCLUDE ALL NECESSARY ITEMS TO PROVIDE A COMPLETE OPERATIONAL SYSTEM.
- 3. ANY DISCREPANCIES NOTED BY THE SUBCONTRACTOR SHALL BE BROUGHT TO THE ATTENTIONS OF THE ARCHITECT (IN WRITING) BEFORE BIDDING THIS PROJECT.
- 4. AFTER BIDS ARE TURNED IN, THE SUBCONTRACTOR SHALL COMPLETE THE SYSTEMS AT NO ADDITIONAL COST.
- 5. PLUMBING, MECHANICAL, AND ELECTRICAL SUBCONTRACTORS ARE RESPONSIBLE FOR COORDINATING ALL COMPONENTS TO INSURE COMPLETE AND WORKING SYSTEMS EACH SUBCONTRACTOR SHALL REVIEW ALL DRAWINGS FOR COMPLIANCE.
- 6. THE ARCHITECT WILL BE RESPONSIBLE TO DETERMINE WHICH TRADE SHALL PROVIDE AND INSTALL ANY COMPONENTS MISSED FOR WORKING SYSTEMS AS NEEDED.

© COPYRIGHT 2019 MERSHAWN ARCHITECTS, INC. NO PRINTING OR COPING IS ALLOWED

OWNER PLUTUS21 DEVELOPMENT 6116 N. CENTRAL EXPWY #700 DALLAS, TEXAS 75206

CASE #SP2020-000

WITHOUT PERMISSION FROM MERSHAWN.



, **T** m ,

3/16" = 1'-0" Scale: 04/21/2023 Project No.: 190602 Designed: GW

Drawn: GW Checked: WM SHEET















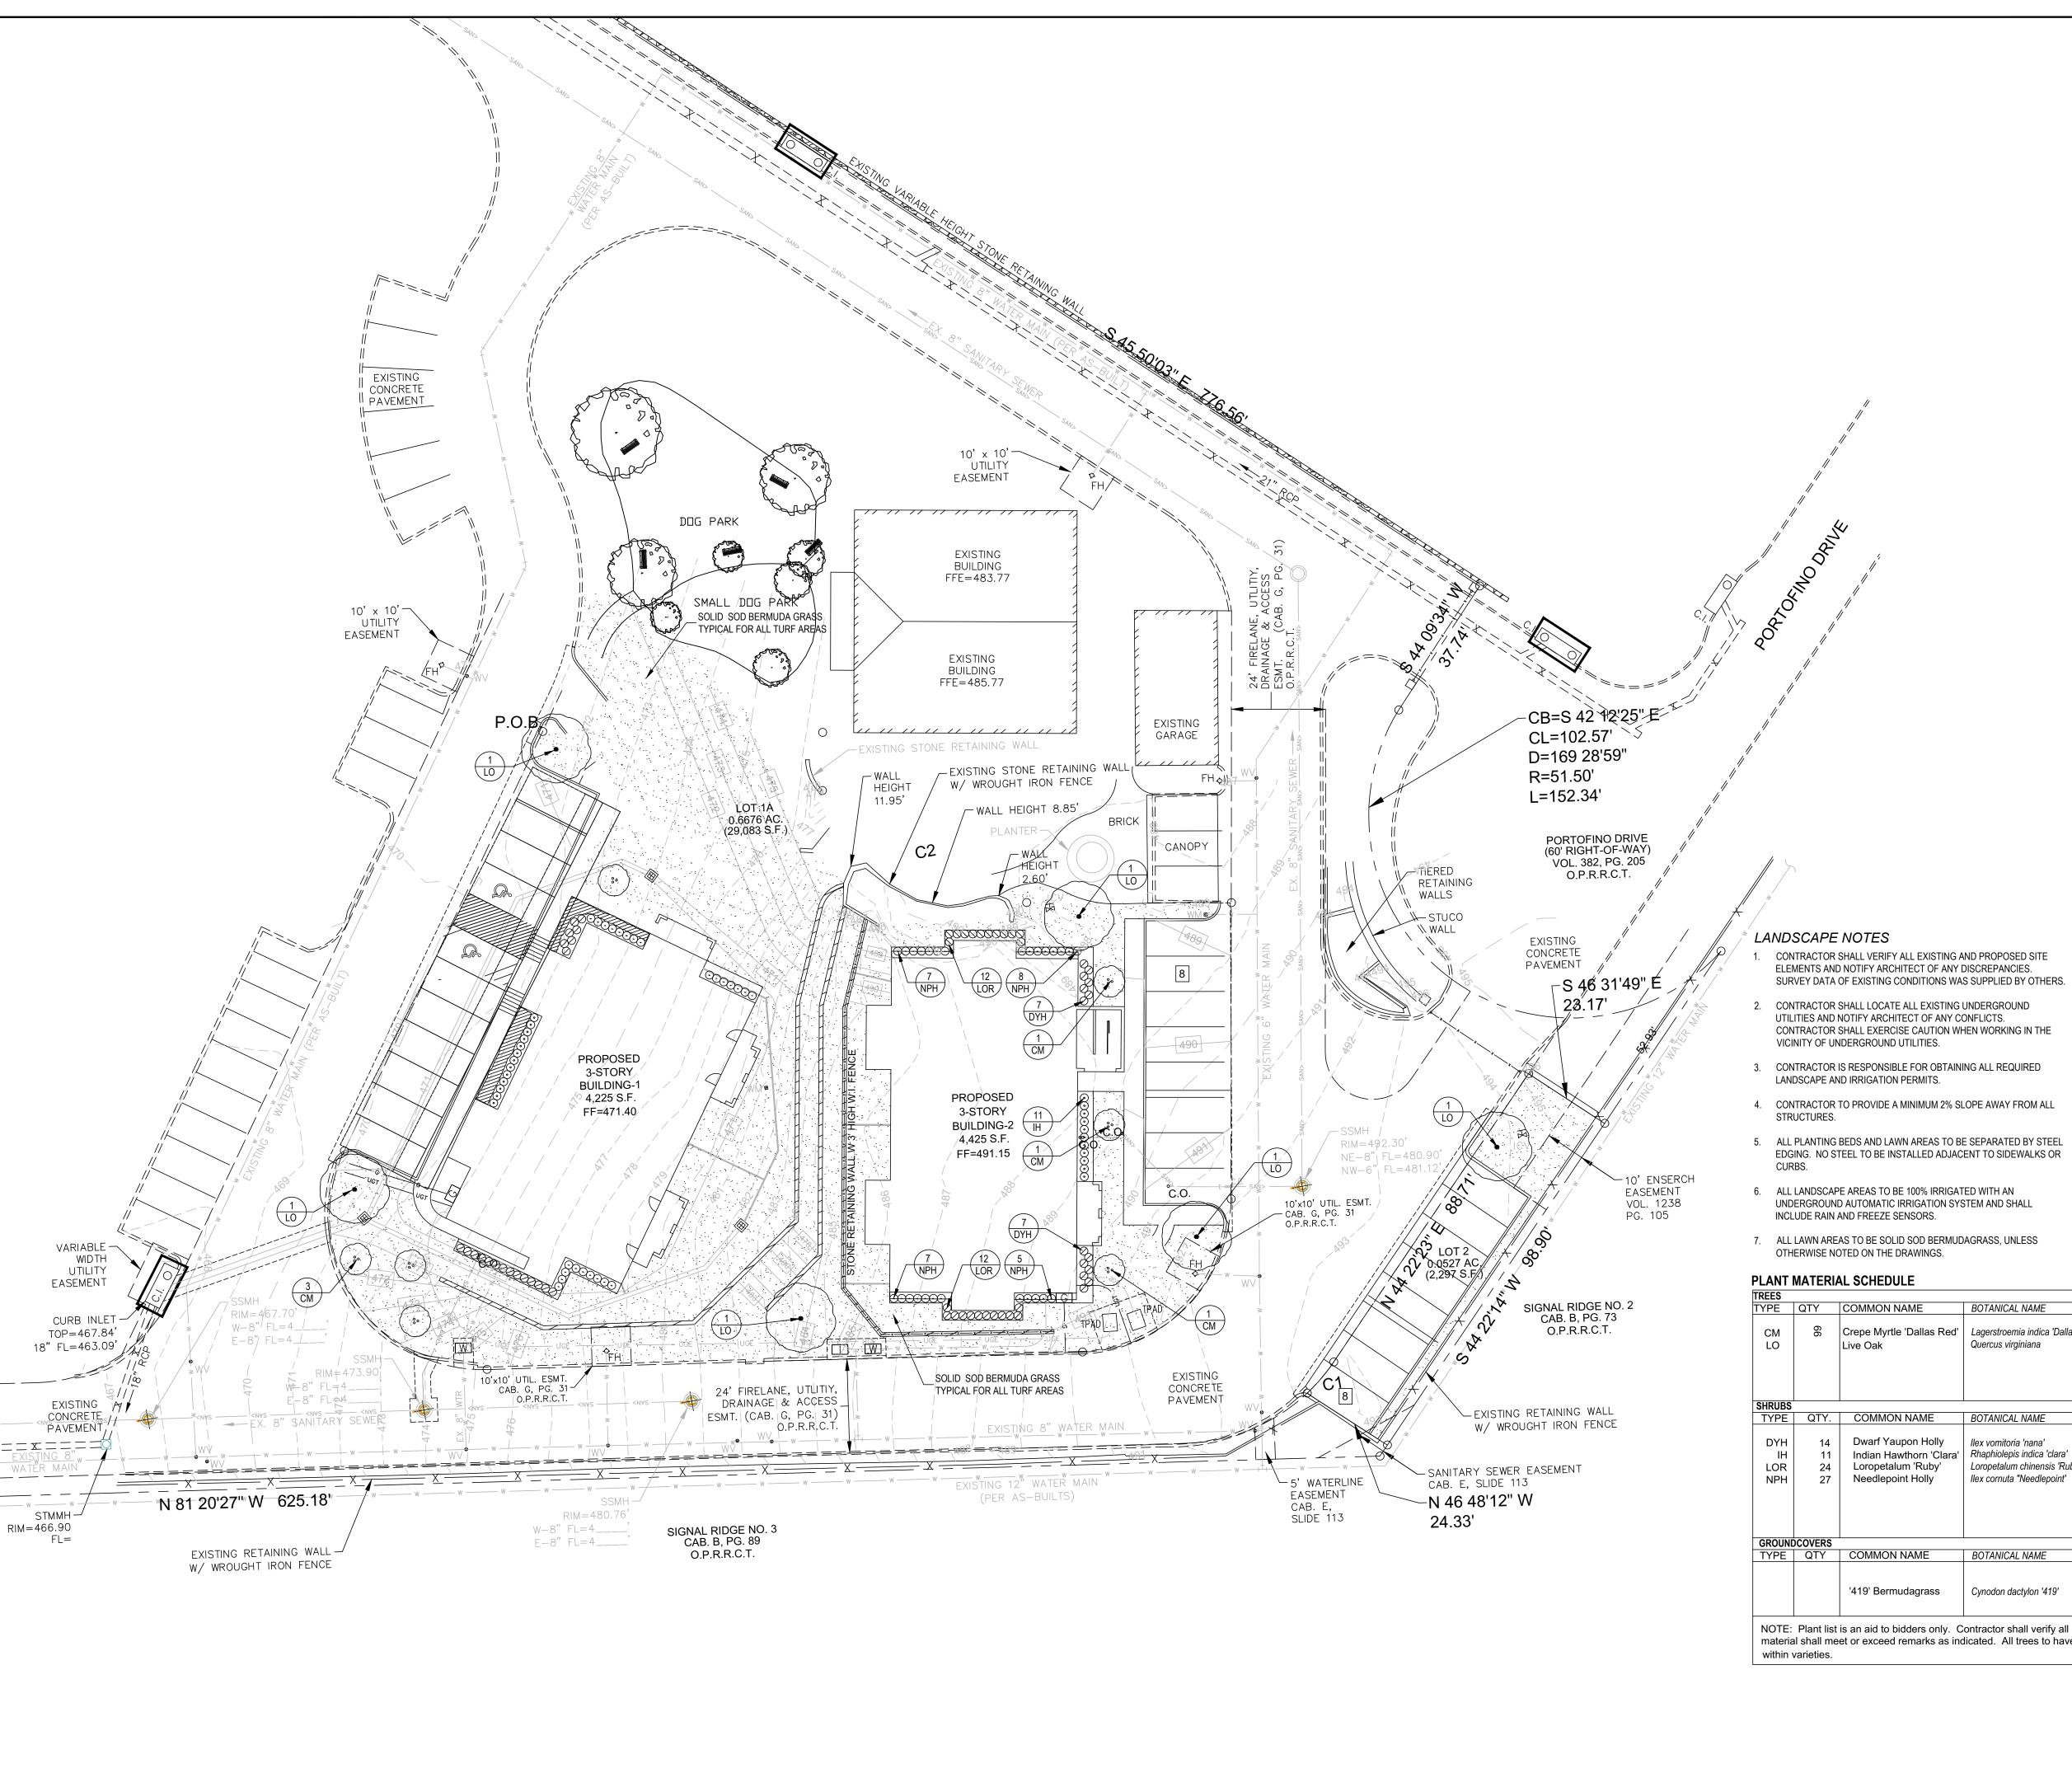

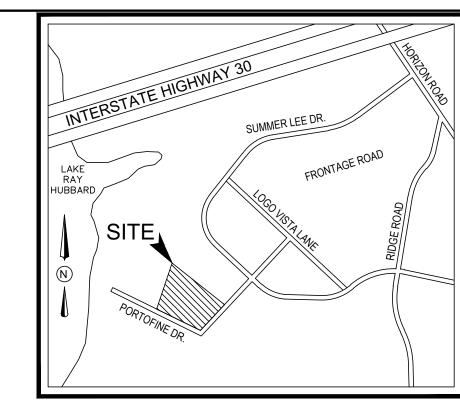

VICINITY MAP

GENERAL LAWN NOTES

- 1. FINE GRADE AREAS TO ACHIEVE FINAL CONTOURS INDICATED ON CIVIL
- ADJUST CONTOURS TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.
- 3. ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFT IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE. CONTRACTOR TO COORDINATE OPERATIONS WITH ON-SITE CONSTRUCTION MANAGER.
- IMPORTED TOPSOIL SHALL BE NATURAL, FRIABLE SOIL FROM THE REGION, KNOWN AS BOTTOM AND SOIL, FREE FROM LUMPS, CLAY, TOXIC SUBSTANCES, ROOTS, DEBRIS, VEGETATION, STONES, CONTAINING NO SALT AND BLACK TO BROWN IN COLOR.
- ALL LAWN AREAS TO BE FINE GRADED, IRRIGATION TRENCHES COMPLETELY SETTLED, AND FINISH GRADE APPROVED BY THE OWNER'S CONSTRUCTION MANAGER OR ARCHITECT PRIOR TO INSTALLATION.
- ALL ROCKS 3/4" DIAMETER AND LARGER, DIRT CLODS, STICKS, CONCRETE SPOILS, ETC. SHALL BE REMOVED PRIOR TO PLACING TOPSOIL AND ANY LAWN INSTALLATION
- 7. CONTRACTOR SHALL PROVIDE (1") ONE INCH OF IMPORTED TOPSOIL ON ALL AREAS TO RECEIVE LAWN.

SOLID SOD NOTES

- FINE GRADE AREAS TO ACHIEVE FINAL CONTOURS INDICATED. LEAVE AREAS TO RECEIVE TOPSOIL 3" BELOW FINAL DESIRED GRADE IN PLANTING AREAS AND 1" BELOW FINAL GRADE IN TURF
- ADJUST CONTOURS TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.
- 3. ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFT IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE. CONTRACTOR TO COORDINATE OPERATIONS WITH ON-SITE CONSTRUCTION
- CONTRACTOR TO COORDINATE WITH ON-SITE CONSTRUCTION MANAGER FOR AVAILABILITY OF EXISTING TOPSOIL.
- PLANT SOD BY HAND TO COVER INDICATED AREA COMPLETELY. INSURE EDGES OF SOD ARE TOUCHING. TOP DRESS JOINTS BY HAND WITH TOPSOIL TO FILL VOIDS.
- ROLL GRASS AREAS TO ACHIEVE A SMOOTH, EVEN SURFACE, FREE FROM UNNATURAL UNDULATIONS.
- WATER SOD THOROUGHLY AS SOD OPERATION PROGRESSES.
- CONTRACTOR SHALL MAINTAIN ALL LAWN AREAS UNTIL FINAL ACCEPTANCE. THIS SHALL INCLUDE, BUT NOT LIMITED TO: MOWING, WATERING, WEEDING, CULTIVATING, CLEANING AND REPLACING DEAD OR BARE AREAS TO KEEP PLANTS IN A VIGOROUS, HEALTHY CONDITION.
- CONTRACTOR SHALL GUARANTEE ESTABLISHMENT OF AN ACCEPTABLE TURF AREA AND SHALL PROVIDE REPLACEMENT FROM LOCAL SUPPLY IF NECESSARY.
- IF INSTALLATION OCCURS BETWEEN SEPTEMBER 1 AND MARCH 1, ALL SOD AREAS TO BE OVER-SEEDED WITH WINTER RYEGRASS, AT A RATE OF (4) POUNDS PER ONE THOUSAND (1000) SQUARE FEET.

NT	MATERIAL	SCHEDULE

YPE	QTY	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
CM LO	66	Crepe Myrtle 'Dallas Red' Live Oak	Lagerstroemia indica 'Dallas Red' Quercus virginiana	6' ht. 3" cal.	container, 3 or 5 trunks, 4' spread min.,tree forr container, 13' ht., 5' spread, 5' clear straight tru k
SHRUBS					
TYPE	QTY.	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
DYH IH LOR NPH	14 11 24 27	Dwarf Yaupon Holly Indian Hawthorn 'Clara' Loropetalum 'Ruby' Needlepoint Holly	llex vomitoria 'nana' Rhaphiolepis indica 'clara' Loropetalum chinensis 'Ruby' llex cornuta "Needlepoint'	5 gal. 5 gal. 5 gal. 5 gal.	container, 18" ht., 18" spread container, 20" ht., 20" spread container, 20" ht., 20" spread container , 24" ht., 20" spread
GROUNE	COVERS				
TYPE	QTY	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
		'419' Bermudagrass	Cynodon dactylon '419'		Solid Sod refer to notes

LANDSCAPE ARCHITECT STUDIO GREEN SPOT, INC 1784 W. McDERMOTT DR. SUITE 110 ALLEN, TEXAS 75013 (469) 369-4448 CHRIS@STUDIOGREENSPOT



$\mathbf{\Omega}$ $\mathbf{\Omega}$ AKE GE Ш

'ATER'

DRIVE TEXAS

<u>N</u>

ISSUE: FOR APPROVAL 11.21.2019

DATE: 11.21.2019

SHEET NAME: LANDSCAPE PLAN

SHEET NUMBER:

SECTION 02900 - LANDSCAPE

PART 1 - GENERAL

REFERENCED DOCUMENTS

Refer to bidding requirements, special provisions, and schedules for additional requirements.

DESCRIPTION OF WORK

Work included: Furnish all supervision, labor, materials, services, equipment and appliances required to complete the work covered in conjunction with the landscaping covered in these specifications and landscaping plans, including:

- Planting (trees, shrubs, and grass)
- Bed preparation and fertilization Notification of sources
- Water and Maintenance until final acceptance Guarantee

REFERENCE STANDARDS

ART 3 - EXECUTION

C. Grass Areas:

INSTALLATION

materials.

BED PREPARATION & FERTILIZATION

All planting areas shall be conditioned as follows:

batter board against the bed areas.

- American Standard for Nursery Stock published by American Association of Nurserymen. 27 October 1980, Edition; by American National Standards Institute, Inc. (Z60.1) – plant
- American Joint Committee on Horticultural Nomenclature: 1942 Edition of Standardized
- Texas Association of Nurserymen, Grades and Standards.
- Hortis Third, 1976 Cornell University

NOTIFICATION OF SOURCES AND SUBMITTALS

- The Contractor shall, within ten (10) days following acceptance of bid, notify the Architect/Owner of the sources of plant materials and bed preparation required for the
- Samples: Provide representative quantities of sandy loam soil, mulch, bed mix material, gravel, and crushed stone. Samples shall be approved by Architect before use on
- Product Data: Submit complete product data and specifications on all other specified
- Submit three representative samples of each variety of ornamental trees, shrubs, and groundcover plants for Architect's approval. When approved, tag, install, and maintain as representative samples for final installed plant materials.
- File Certificates of Inspection of plant material by state, county, and federal authorities with Architect, if required

Landscape Contractor to inspect all existing conditions and report any deficiencies to the

Prepare new planting beds by scraping away existing grass and weeds as necessary.

Till existing soil to a depth of six (6") inches prior to placing compost and fertilizer.

compost and till into a depth of six (6") inches of the topsoil. Apply organic fertilizer

such as Sustane or Green Sense at the rate of twenty (20) pounds per one thousand

Apply fertilizer as per manufacturers recommendations. Add six (6") inches of

3. Backfill for tree pits shall be as follows: Use existing top soil on site (use imported

1. Areas to be Solid Sod Bermudagrass: Blocks of sod should be laid joint to joint,

topsoil where they are evidently gaped open, then watered thoroughly.

topsoil as needed) free from large clumps, rocks, debris, caliche, subsoils, etc.,

(staggered joints) after fertilizing the ground first. Roll grass areas to achieve a smooth, even surface. The joints between the blocks of sod should be filled with

2. Areas to be Hydromulch Common Bermudagrass: Hydromulch with bermudagrass

Maintenance of plant materials shall begin immediately after each plant is delivered to the

Plant materials shall be delivered to the site only after the beds are prepared and area

ready for planting. All shipments of nursery materials shall be thoroughly protected from

the drying winds during transit. All plants which cannot be planted at once, after delivery

to the site, shall be well protected against the possibility of drying by wind and sun. Balls

of earth of B & B plants shall be kept covered with soil or other acceptable material. All

Notify the Landscape Architect for inspection and approval of all positioning of plant

Excavate pits with vertical sides and horizontal bottom. Tree pits shall be large enough to

permit handling and planting without injury to balls of earth or roots and shall be of such

depth that, when planted and settled, the crown of the plant shall bear the same

relationship to the finish grade as it did to soil surface in original place of growth.

plants remain the property of the Contractor until final acceptance.

Position the trees and shrubs in their intended location as per plan

site and shall continue until all construction has been satisfactorily accomplished.

seed at a rate of two (2) pounds per one thousand (1,000) square feet. Use a 4' x 8'

All planting areas shall receive a two (2") inch layer of specified mulch.

placed in nine (9") inch layers and watered in thoroughly.

F. Soil Analysis: Provide sandy loam soil analysis if requested by the Architect.

JOB CONDITIONS

- General Contractor to complete the following punch list: Prior to Landscape Contractor initiating any portion of landscape installation, General Contractor shall leave planting bed areas three (3") inches below finish grade of sidewalks, drives and curbs as shown on the drawings. All lawn areas to receive solid sod shall be left one (1") inch below the finish grade of sidewalks, drives, and curbs. All construction debris shall be removed prior to Landscape Contractor beginning any work.
- B. General Contractor shall provide topsoil as described in Section 02200 Earthwork.
- Storage of materials and equipment at the job site will be at the risk of the Landscape Contractor. The Owner cannot be held responsible for theft or damage.

MAINTENANCE AND GUARANTEE

Maintenance:

- 1. The Landscape Contractor will be held responsible for the maintenance of all work from the time of planting until final acceptance by the Owner. No trees, shrubs, groundcover or grass will be accepted unless they show a healthy growth and
- satisfactory foliage conditions. Maintenance shall include watering of trees and plants, cultivation, weeding spraying, edging, pruning of trees, mowing of grass, cleaning up and all other work necessary of maintenance.
- 3. A written notice requesting final inspection and acceptance should be submitted to the Owner at least seven (7) days prior to completion. An on-site inspection by
- Owner and Landscape Contractor will be completed prior to written acceptance. 4. After final acceptance of installation, the Landscape Contractor will not be required to do any of the above listed work.

B. Guarantee:

- 1. Trees shall be guaranteed for a twelve (12) month period after acceptance. Shrubs and groundcover shall be guaranteed for twelve (12) months. The Contractor shall replace all dead materials as soon as weather permits and upon notification of the Owner. Plants, including trees, which have partially died so that shape, size, or symmetry has been damaged, shall be considered subject to replacement. In such
- cases, the opinion of the Owner shall be final. a. Plants used for replacement shall be of the same size and kind as those originally planted and shall be planted as originally specified. All work, including materials, labor and equipment used in replacements, shall carry a twelve (12) month guarantee. Any damage, including ruts in lawn or bed areas, incurred as a result of making replacements shall be immediately
- b. At the direction of the Owner, plants may be replaced at the start of the next year's planting season. In such cases, dead plants shall be removed from the
- premises immediately. c. When plant replacements are made, plants, soil mix, fertilizer and mulch are to be utilized as originally specified and reinspected for full compliance with Contract requirements. All replacements are to be included under "Work" of this section.

- 2. The Owner agrees that for the guarantee to be effective, he will water plants at least twice a week during dry periods and cultivate beds once a month after final
- 3. The above guarantee shall not apply where plants die after acceptance because of injury from storms, hail, freeze, insects, diseases, injury by humans, machines or
- 4. Acceptance for all landscape work shall be given after final inspection by the Owner provided the job is in a completed, undamaged condition, and there is a stand of grass in all lawn areas. At this time, the Owner will assume maintenance on the accepted work.
- Repairs: Any necessary repairs under the Guarantee must be made within ten (10) days after receiving notice, weather permitting, and in the event the Landscape Contractor does not make repairs accordingly, the Owner, without further notice to Contractor, may provide materials and men to make such repairs at the expense of the Landscape

QUALITY ASSURANCE

Contractor.

- General: Comply with applicable Federal, State, County and Local regulations governing landscape materials and work
- Personnel: Employ only experienced personnel who are familiar with the required work. Provide full time supervision by a qualified foreman acceptable to Landscape Architect.
- Selection of Plant Material:
- 1. Make contact with suppliers immediately upon obtaining notice of contract acceptance to select and book materials. Develop a program of maintenance (pruning and fertilization) which will insure the purchased materials will meet and/or exceed project specifications
- 2. Landscape Architect will provide a key identifying each tree location on site. Written verification will be required to document material selection, source and delivery schedules to site.
- 3. Owner and/or Architect shall inspect all plant materials when reasonable at place of growth for compliance with requirements for genus, species, cultivar/variety, size and 4. Owner and/or Architect retains the right to further inspect all plant material upon arrival at the site and during installation for size and condition of root balls, limbs,
- branching habit, insects, injuries, and latent defects. 5. Owner and/or Architect may reject unsatisfactory or defective material at any time during the process of work. Remove rejected materials from the site immediately. Plants damaged in transit or at job site shall be rejected.

PRODUCT DELIVERY, STORAGE AND HANDLING

Preparation:

Balled and Burlapped (B&B) Plants: Dig and prepare shipment in a manner that will not damage roots, branches, shape, and future development.

OF ROOTBALL

NOT TO SCALE

TREE PLANTING DETAIL

2. Container Grown Plants: Deliver plants in rigid container to hold ball shape and

- 1. Deliver packaged materials in sealed containers showing weight, analysis and name of manufacturer. Protect materials from deterioration during delivery and while stored
- 2. Deliver only plant materials that can be planted in one day unless adequate storage and watering facilities are available on job site.
- 3. Protect root balls by heeling in with sawdust or other approved moisture retaining material if not planted within 24 hours of delivery.
- 4. Protect plants during delivery to prevent damage to root balls or desiccation of leaves. Keep plants moist at all times. Cover all materials during transport.
- 5. Notify Architect of delivery schedule 72 hours in advance so plant material may be observed upon arrival at job site. 6. Remove rejected plant material immediately from site.
- 7. To avoid damage or stress, do not lift, move, adjust to plumb, or otherwise manipulate plants by trunk or stems.

PART 2 - PRODUCTS

2.1 PLANTS

-DO NOT CUT CENTRAL LEADER

-REFERENCE PLAN FOR TREE TYPE

-RUBBER HOSE

2 STRANDS NO. 12 GAUGE

-2" HIGH WATERING RING

(3) METAL T-POST PAINTED

GREEN TRIANGULAR SPACING.

-FINISH GRADE SCARIFY SIDES

ROOTBALL, DO NOT DISTURB. TOP

-OF ROOTBALL TO BE SET 1" ABOVE

-NATIVE SOIL, REF. SPECIFICATIONS

NOTE: LOCATE STAKES OUTSIDE

OF TREE WELL. POSITION STAKES

TO SECURE TREE AGAINST SEASONAL

-CRUSHED ROCK

PREVAILING WINDS.

GALVANIZED WIRE, TWISTED

-2" LAYER MULCH, REF. SPECIFICATIONS

- General: Well-formed No. 1 grade or better nursery grown stock. Listed plant heights are from tops of root balls to nominal tops of plants. Plant spread refers to nominal outer width of the plant, not to the outer leaf tips. Plants will be individually approved by the Architect and his decision as to their acceptability shall be final.
- Quantities: The drawings and specifications are complimentary. Anything called for on one and not the other is as binding as if shown and called for on both. The plant schedule is an aid to bidders only. Confirm all quantities on plan.
- C. Quality and size: Plant materials shall conform to the size given on the plan, and shall be healthy, symmetrical, well-shaped, full branched, and well rooted. The plants shall be free from injurious insects, diseases, injuries to the bark or roots, broken branches, objectionable disfigurements, insect eggs and larvae and are to be of specimen quality.
- Approval: All plant materials shall be subject to the approval of the Owner. All plants which are found unsuitable in growth, or in any unhealthy, badly shaped, or undersized condition, will be rejected by the Landscape Architect, either before or after planting, and shall be removed at the expense of the Landscape Contractor and replaced with acceptable plants as specified.
- Trees shall be healthy, full-branched, well-shaped and shall meet the trunk diameter and height requirements of the plant schedule. Balls shall be firm, neat, slightly tapered, and well wrapped in burlap. Any tree loose in the ball or with broken ball at time of planting will be rejected. Balls shall be ten (10") inched in diameter for each one (1") inch of trunk diameter, Measured six (6") inched above ball. Nomenclature conforms to the customary nursery usage: for clarification, the term "multi-trunk" defines a plant having three (3) or more trunks of nearly equal diameter
- Pruning: All pruning of trees and shrubs, as directed by the Landscape Architect, shall be executed by the Landscape Contractor at no additional cost to the Owner

2.2 SOIL PREPARATION MATERIALS

- A. Sandy Loam:
- 1. Friable, fertile, dark, loamy soil, free of clay lumps, subsoil, stones and other extraneous material and reasonably free of weeds and foreign grasses. Loam containing Dallasgrass or Nutgrass shall be rejected.
- 2. Physical properties as follows: Clay - between 7-27 percent Silt – between 15-25 percent
- Sand less than 52 percent Organic matter shall be 3%-10% of total dry weight. 4. If requested, provide a certified soil analysis conducted by an approved soil testing
- laboratory verifying that sandy loam meets the above requirements. Organic Material: Compost with a mixture of 80% vegetative matter and 20% animal
- waste. Ingredients should be a mix of course and fine textured material.
- Premixed Bedding Soil as supplied by Vital Earth Resources, Gladewater, Texas; Professional Bedding Soil as supplied by Living Earth Technology, Dallas, Texas or Acid


Gro Municipal Mix as supplied by Soil Building Systems, Dallas, Texas or approved equal.


Mulch: Double Shredded Hardwood Mulch, partially decomposed, dark brown. Living


- D. Sharp Sand: Sharp sand must be free of seeds, soil particles and weeds.
- Earth Technologies or approved equal.
- Organic Fertilizer: Fertilaid, Sustane, or Green Sense or equal as recommended for required applications. Fertilizer shall be delivered to the site in original unopened containers, each bearing the manufacturer's guaranteed statement of analysis.
- Commercial Fertilizer: 10-20-10 or similar analysis. Nitrogen source to be a minimum 50% slow release organic Nitrogen (SCU or UF) with a minimum 8% sulphur and 4% iron, plus micronutrients.
- B. Peat: Commercial sphagnum peat moss or partially decomposed shredded pine bark or other approved organic material.


MISCELLANEOUS MATERIALS

- A. Steel Edging: Shall be Ryerson "Estate Curbing", 1/8" x 4" with stakes 4' on center.
- B. Staking Material for Shade Trees:
- 1. Post: Studded T-Post, #1 Armco with anchor plate; 6'-0" length; paint green. 2. Wire: 12 gauge, single strand, galvanized wire. 3. Rubber hose: 2 ply, fiber reinforced hose, minimum ½ inch inside diameter. Color:
- Gravel: Washed native pea gravel, graded 1 in. to 1-1/2 in.
- Filter Fabric: Mirafi 140N by Celanese Fibers Marketing Company, available at Loftland Co., (214) 631-5250 or approved equal.

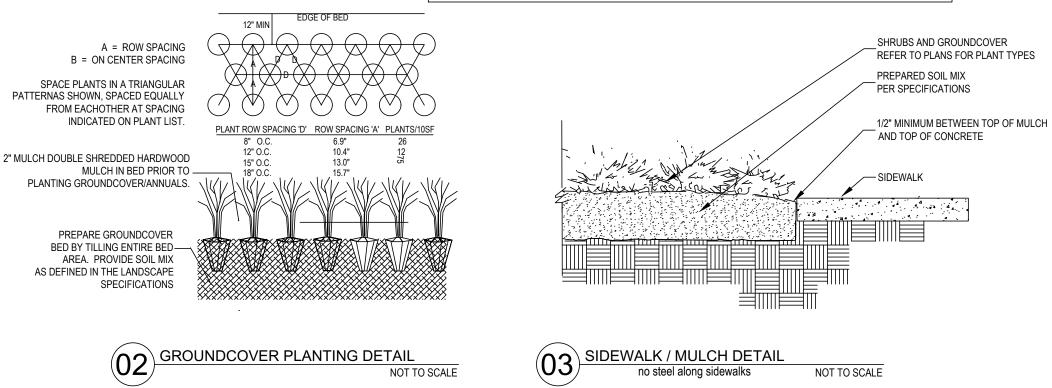

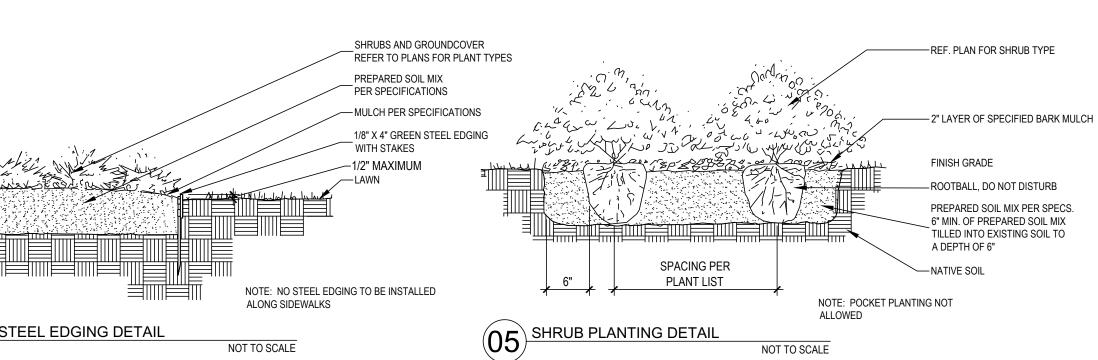

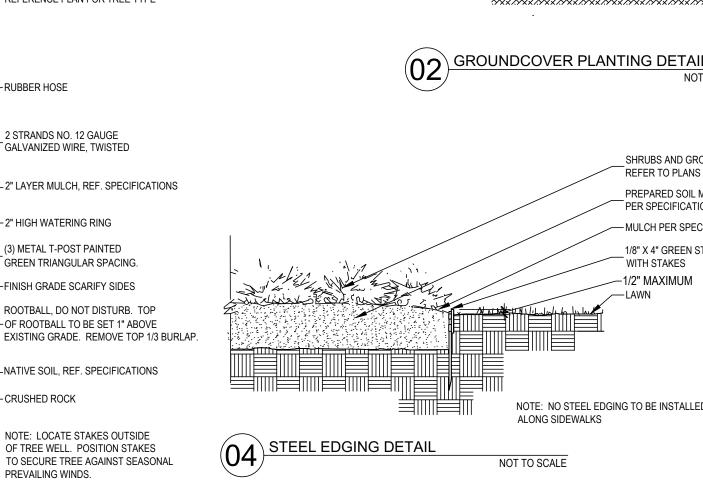

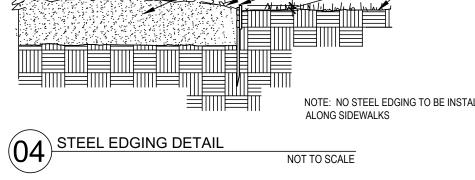

LANDSCAPE ARCHITECT

STUDIO GREEN SPOT, INC

1784 W. McDERMOTT DR.

SUITE 110

ALLEN, TEXAS 75013

(469) 369-4448

CHRIS@STUDIOGREENSPOT.

4 $\mathbf{\Omega}$ $\mathbf{\omega}$ 5 4 C Ш **ATE**

DRIVI TEXA

O O

ISSUE: FOR APPROVAL 11.21.2019


 \geq

11.21.2019

SHEET NAME:

LANDSCAPE SPECIFICATIONS

SHEET NUMBER

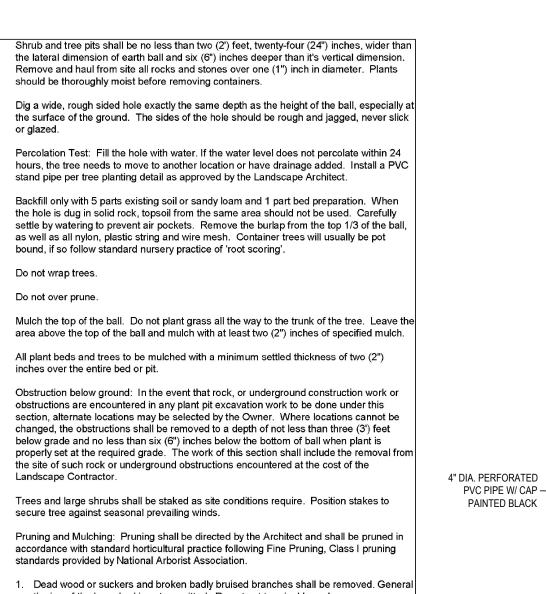

Landscape Contractor. Trees and large shrubs shall be staked as site conditions require. Position stakes to secure tree against seasonal prevailing winds.

should be thoroughly moist before removing containers.

bound, if so follow standard nursery practice of 'root scoring'.

- Pruning and Mulching: Pruning shall be directed by the Architect and shall be pruned in accordance with standard horticultural practice following Fine Pruning, Class I pruning standards provided by National Arborist Association.
- 1. Dead wood or suckers and broken badly bruised branches shall be removed. General tipping of the branched is not permitted. Do not cut terminal branches. Pruning shall be done with clean, sharp tools. Immediately after planting operations are completed, all tree pits shall be covered with
- a layer of organic material two (2") inches in depth. This limit of the organic material Steel Curbing Installation: 1. Curbing shall be aligned as indicated on plans. Stake out limits of steel curbing and obtain Owners approval prior to installation.
- All steel curbing shall be free of kinks and abrupt bends. Top of curbing shall be 3/4" maximum height above grade. . Stakes are to be installed on the planting bed side of the curbing, as opposed to the
- Do not install steel edging along sidewalks. 3. Cut steel edging at 45 degree angle where edging meets sidewalk.

CLEANUP AND ACCEPTANCE


J. Do not wrap trees.

K. Do not over prune.

inches over the entire bed or pit.

Cleanup: During the work, the premises shall be kept neat and orderly at all times. Storage areas for all materials shall be so organized that they, too, are neat and orderly. All trash and debris shall be removed from the site as work progresses. Keep paved areas clean by sweeping or hosing at end of each days work.

END OF SECTION

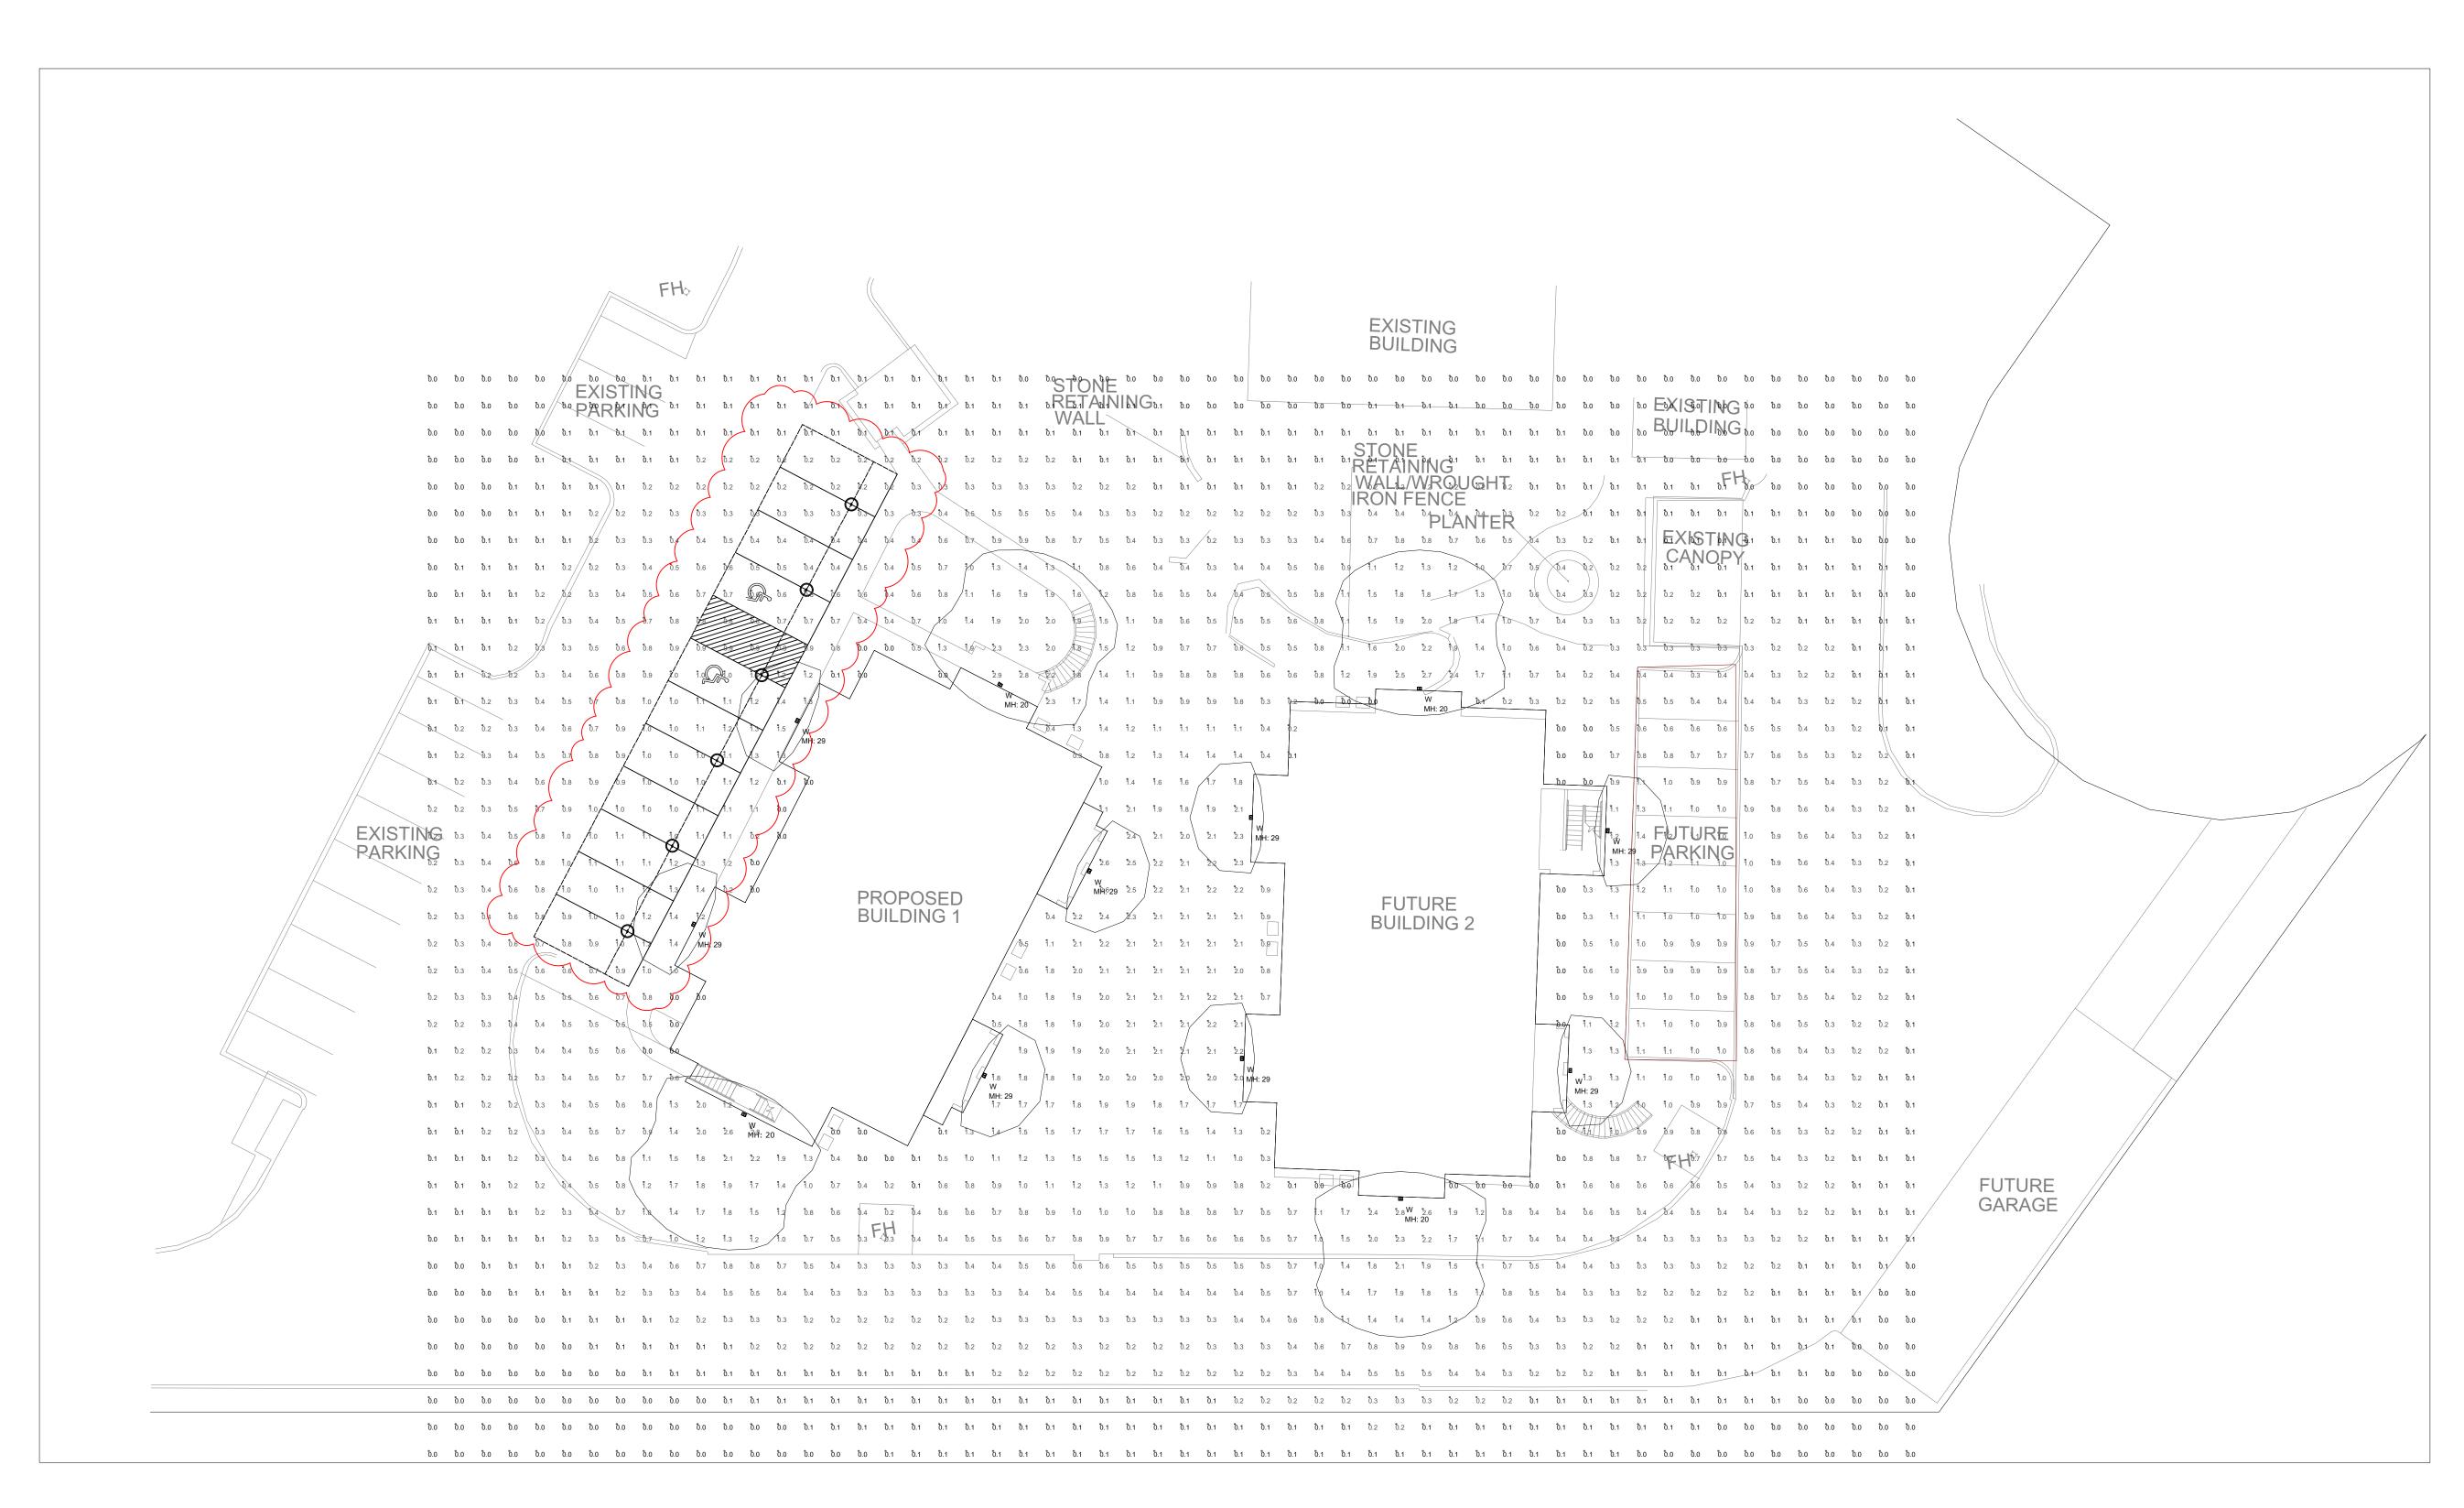

Luminair	Luminaire Schedule							
Symbol	Type	Qty	Manufacturer / Catalog Number	Total Lumen Output	Total Input Watts	Ballast Factor	Light Lost Factor	User Defined Factor
•	W	12	LITHONIA WDGE2 LED P3 40K 80CRI VW VOLTAGE MOUNTING FINISH	3214	22.55	1.000	0.808	1.000
O		6	LUXRITE LED Canopy Light LED 28W 3CCT 3000K	3360	28		0.70	1.000


Calculation Grid Location	Calc. Height (Ft.)	Units	Avg	Max	Min	Avg/Min
GRADE_Planar	0	Fc	0.53	2.9	0.0	N.A.
PARKING1		Fc	0.83	1.4	0.1	8.30
PARKING2		Fc	0.90	1.4	0.3	3.00

Illuminance (Fc)
Average = 0.83
Maximum = 1.4
Minimum = 0.1
Avg/Min Ratio = 8.30
Max/Min Ratio = 14.00

PARKING1

Illuminance (Fc)
Average = 0.90
Maximum = 1.4
Minimum = 0.3
Avg/Min Ratio = 3.00
Max/Min Ratio = 4.67

PARKING2

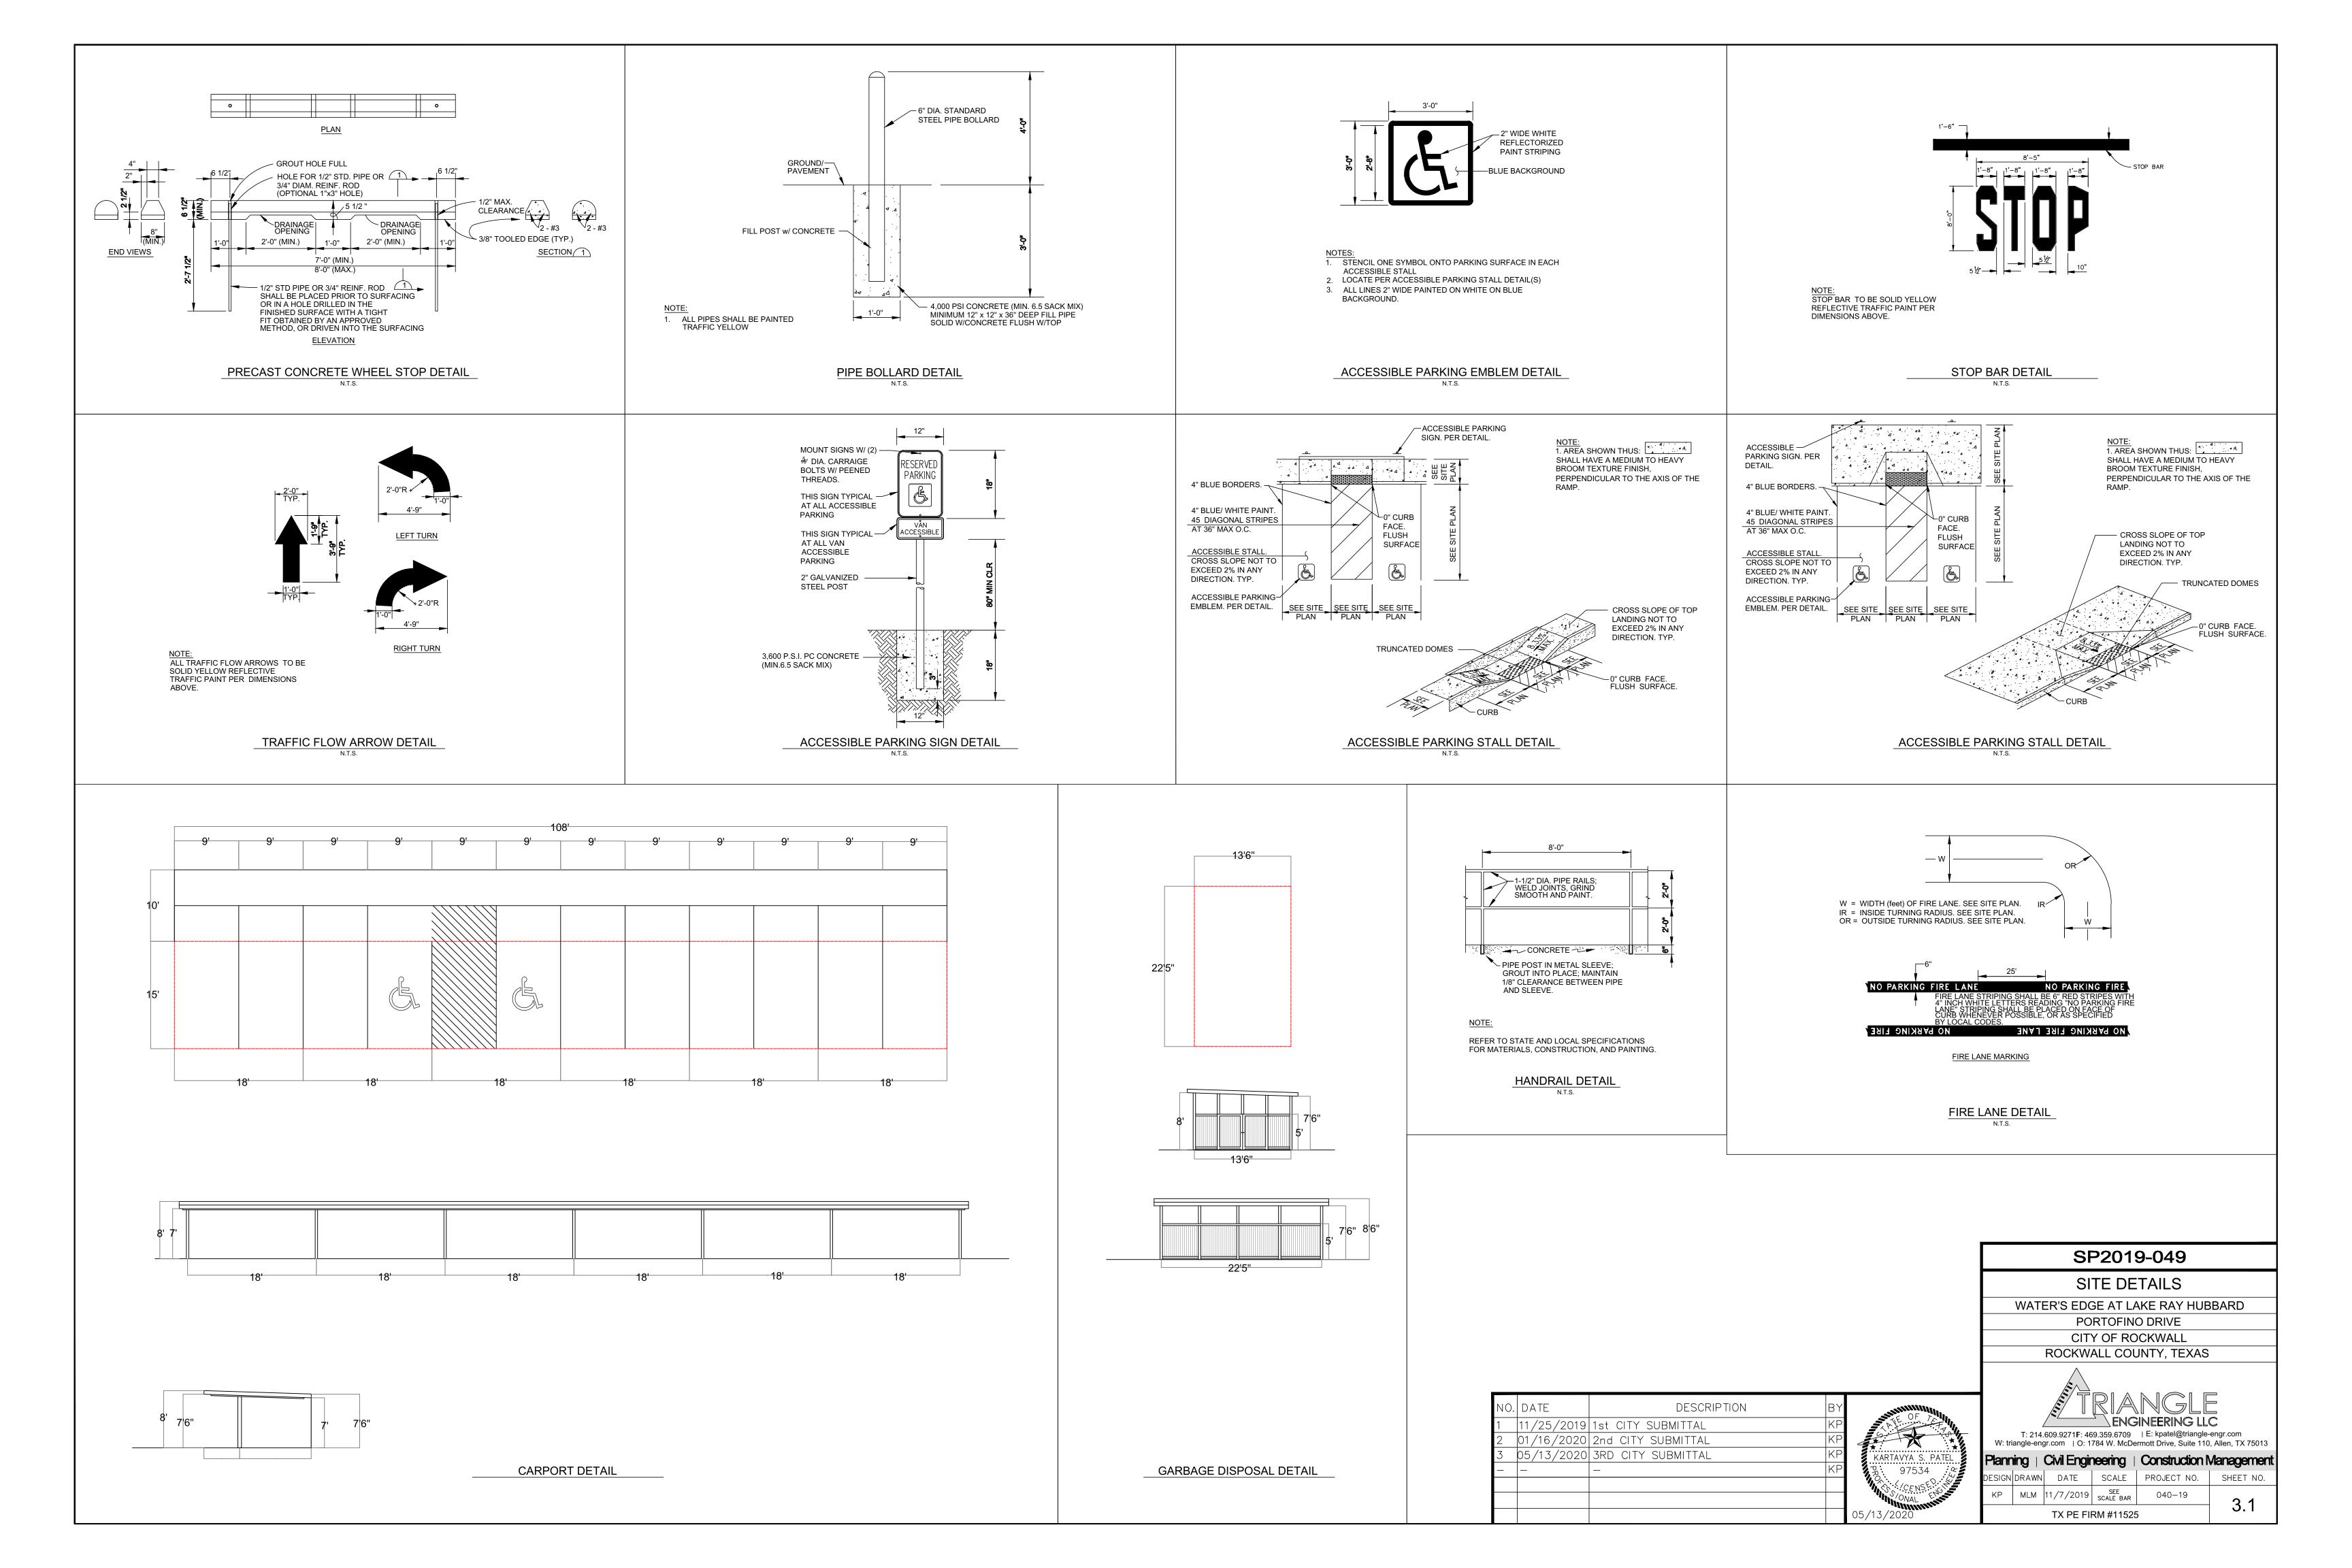



DEVELOPMENT APPLICATION

City of Rockwall
Planning and Zoning Department
385 S. Goliad Street
Rockwall, Texas 75087

Ì	PLANNING & ZONING CASE NO.
	<u>NOTE:</u> THE APPLICATION IS NOT CONSIDERED ACCEPTED BY THE CITY UNTIL THE PLANNING DIRECTOR AND CITY ENGINEER HAVE SIGNED BELOW.
	DIRECTOR OF PLANNING:
	CITY ENGINEER:

	Rockwall, Texas 75067	CITYE	NGINEER:		
PLEASE CHECK THE	APPROPRIATE BOX BELOW TO INDICATE THE TYPE O	F DEVELOPMENT REQ	UEST [SELECT ONLY ONE BOX];		
☐ PRELIMINARY F ☐ FINAL PLAT (\$3 ☐ REPLAT (\$300.0 ☐ AMENDING OR ☐ PLAT REINSTAT SITE PLAN APPLIC ☐ SITE PLAN (\$25	(\$100.00 + \$15.00 ACRE) 1 PLAT (\$200.00 + \$15.00 ACRE) 1 00.00 + \$20.00 ACRE) 1 10 + \$20.00 ACRE) 1 MINOR PLAT (\$150.00) FEMENT REQUEST (\$100.00)	ZONING APPLICATION FEES: ☐ ZONING CHANGE (\$200.00 + \$15.00 ACRE) ¹ ☐ SPECIFIC USE PERMIT (\$200.00 + \$15.00 ACRE) ¹ & 2 ☐ PD DEVELOPMENT PLANS (\$200.00 + \$15.00 ACRE) ¹ OTHER APPLICATION FEES: ☐ TREE REMOVAL (\$75.00) ☐ VARIANCE REQUEST/SPECIAL EXCEPTIONS (\$100.00) ² NOTES: ¹: IN DETERMINING THE FEE, PLEASE USE THE EXACT ACREAGE WHEN MULTIPLYING BY THE PER ACRE AMOUNT. FOR REQUESTS ON LESS THAN ONE ACRE, ROUND UP TO ONE (1) ACRE. ≥: A \$1,000.00 FEE WILL BE ADDED TO THE APPLICATION FEE FOR ANY REQUEST THAT INVOLVES CONSTRUCTION WITHOUT OR NOT IN COMPLIANCE TO AN APPROVED BUILDING PERMIT.			
PROPERTY INFO	DRMATION [PLEASE PRINT]				
ADDRESS	BUILDING 2 , 2014-A, PORT	TOFINO DR	, ROCKWALL TX 75032		
SUBDIVISION	WATERS EDGE AT LAKE				
GENERAL LOCATION	SUMMER LEE AND POI	RTOFINO S.	PIVE		
ZONING, SITE PI	AN AND PLATTING INFORMATION [PLEASI	E PRINT]			
CURRENT ZONING	PD -22	CURRENT USE	CONDOMINIUMS		
PROPOSED ZONING		PROPOSED USE	COMBOMINIUMS.		
ACREAGE	6.5995 LOTS [CURRENT]	85	LOTS [PROPOSED] 85		
REGARD TO ITS A	DPLATS: BY CHECKING THIS BOX YOU ACKNOWLEDGE TH APPROVAL PROCESS, AND FAILURE TO ADDRESS ANY OF S ENIAL OF YOUR CASE.	HAT DUE TO THE PASSA STAFF'S COMMENTS BY T	GE OF <u>HB3167</u> THE CITY NO LONGER HAS FLEXIBILITY WITH THE DATE PROVIDED ON THE DEVELOPMENT CALENDAR WILL		
OWNER/APPLIC	ANT/AGENT INFORMATION [PLEASE PRINT/CHI	ECK THE PRIMARY CONT.	ACT/ORIGINAL SIGNATURES ARE REQUIRED]		
✓ OWNER	PLUTUS 21 DEUELOPMENT.	✓ □ APPLICANT			
CONTACT PERSON	DANIYAL AWAN	CONTACT PERSON			
ADDRESS	11455 NEWKIRK ST	ADDRESS			
OITV OTATE B 710	# 1405	CITY, STATE & ZIP			
CITY, STATE & ZIP PHONE	DAUAS TX 75229	PHONE			
	469 853 6007 dm @ Plutus 21 · dev	E-MAIL			
		_ 17/7 (IL			
BEFORE ME, THE UNDER	CATION [required] RSIGNED AUTHORITY, ON THIS DAY PERSONALLY APPEAREI ON ON THIS APPLICATION TO BE TRUE AND CERTIFIED THE	Daniyal A FOLLOWING:	[OWNER] THE UNDERSIGNED, WHO		
B 100 + 00 AJGUST NFORMATION CONTAINE SUBMITTED IN CONJUNCT	TO COVER THE COST OF THIS APPLICATION, HA 20 23 BY SIGNING THIS APPLICATION, I AGRE D WITHIN THIS APPLICATION TO THE PUBLIC. THE CITY IS TON WITH THIS APPLICATION, IF SUCH REPRODUCTION IS ASSO	S BEEN PAID TO THE CITY (E THAT THE CITY OF ROC ALSO AUTHORIZED AND	CKWALL (I.E. "CITY") IS AUTHORIZED AND PERMITTED TO PROVIDE PERMITTED TO REPRODUCE ANY COPYRIGHTED INFORMATION		
GIVEN UNDER MY HAND	AND SEAL OF OFFICE ON THIS THE 18+ DAY OF AUG	just , 2023	Comm. Expires 03-02-2026 Notary ID 133621400		
NOTABLY BUTTON	OWNER'S SIGNATURE		·illin.		
NUTARY PUBLIC IN AND	FOR THE STATE OF TEXAS	112 Cheistine ben	mingh MY COMMISSION EXPIRES 3.2-2626		







City of Rockwall Planning & Zoning Department 385 S. Goliad Street Rockwall, Texas 75087 (P): (072) 774 7745

(P): (972) 771-7745 (W): www.rockwall.com

The City of Rockwall GIS maps are continually under development and therefore subject to change without notice. While we endeavor to provide timely and accurate information, we make no guarantees. The City of Rockwall makes no warranty, express or implied, including warranties of merchantability and fitness for a particular purpose. Use of the information is the sole responsibility of the user.



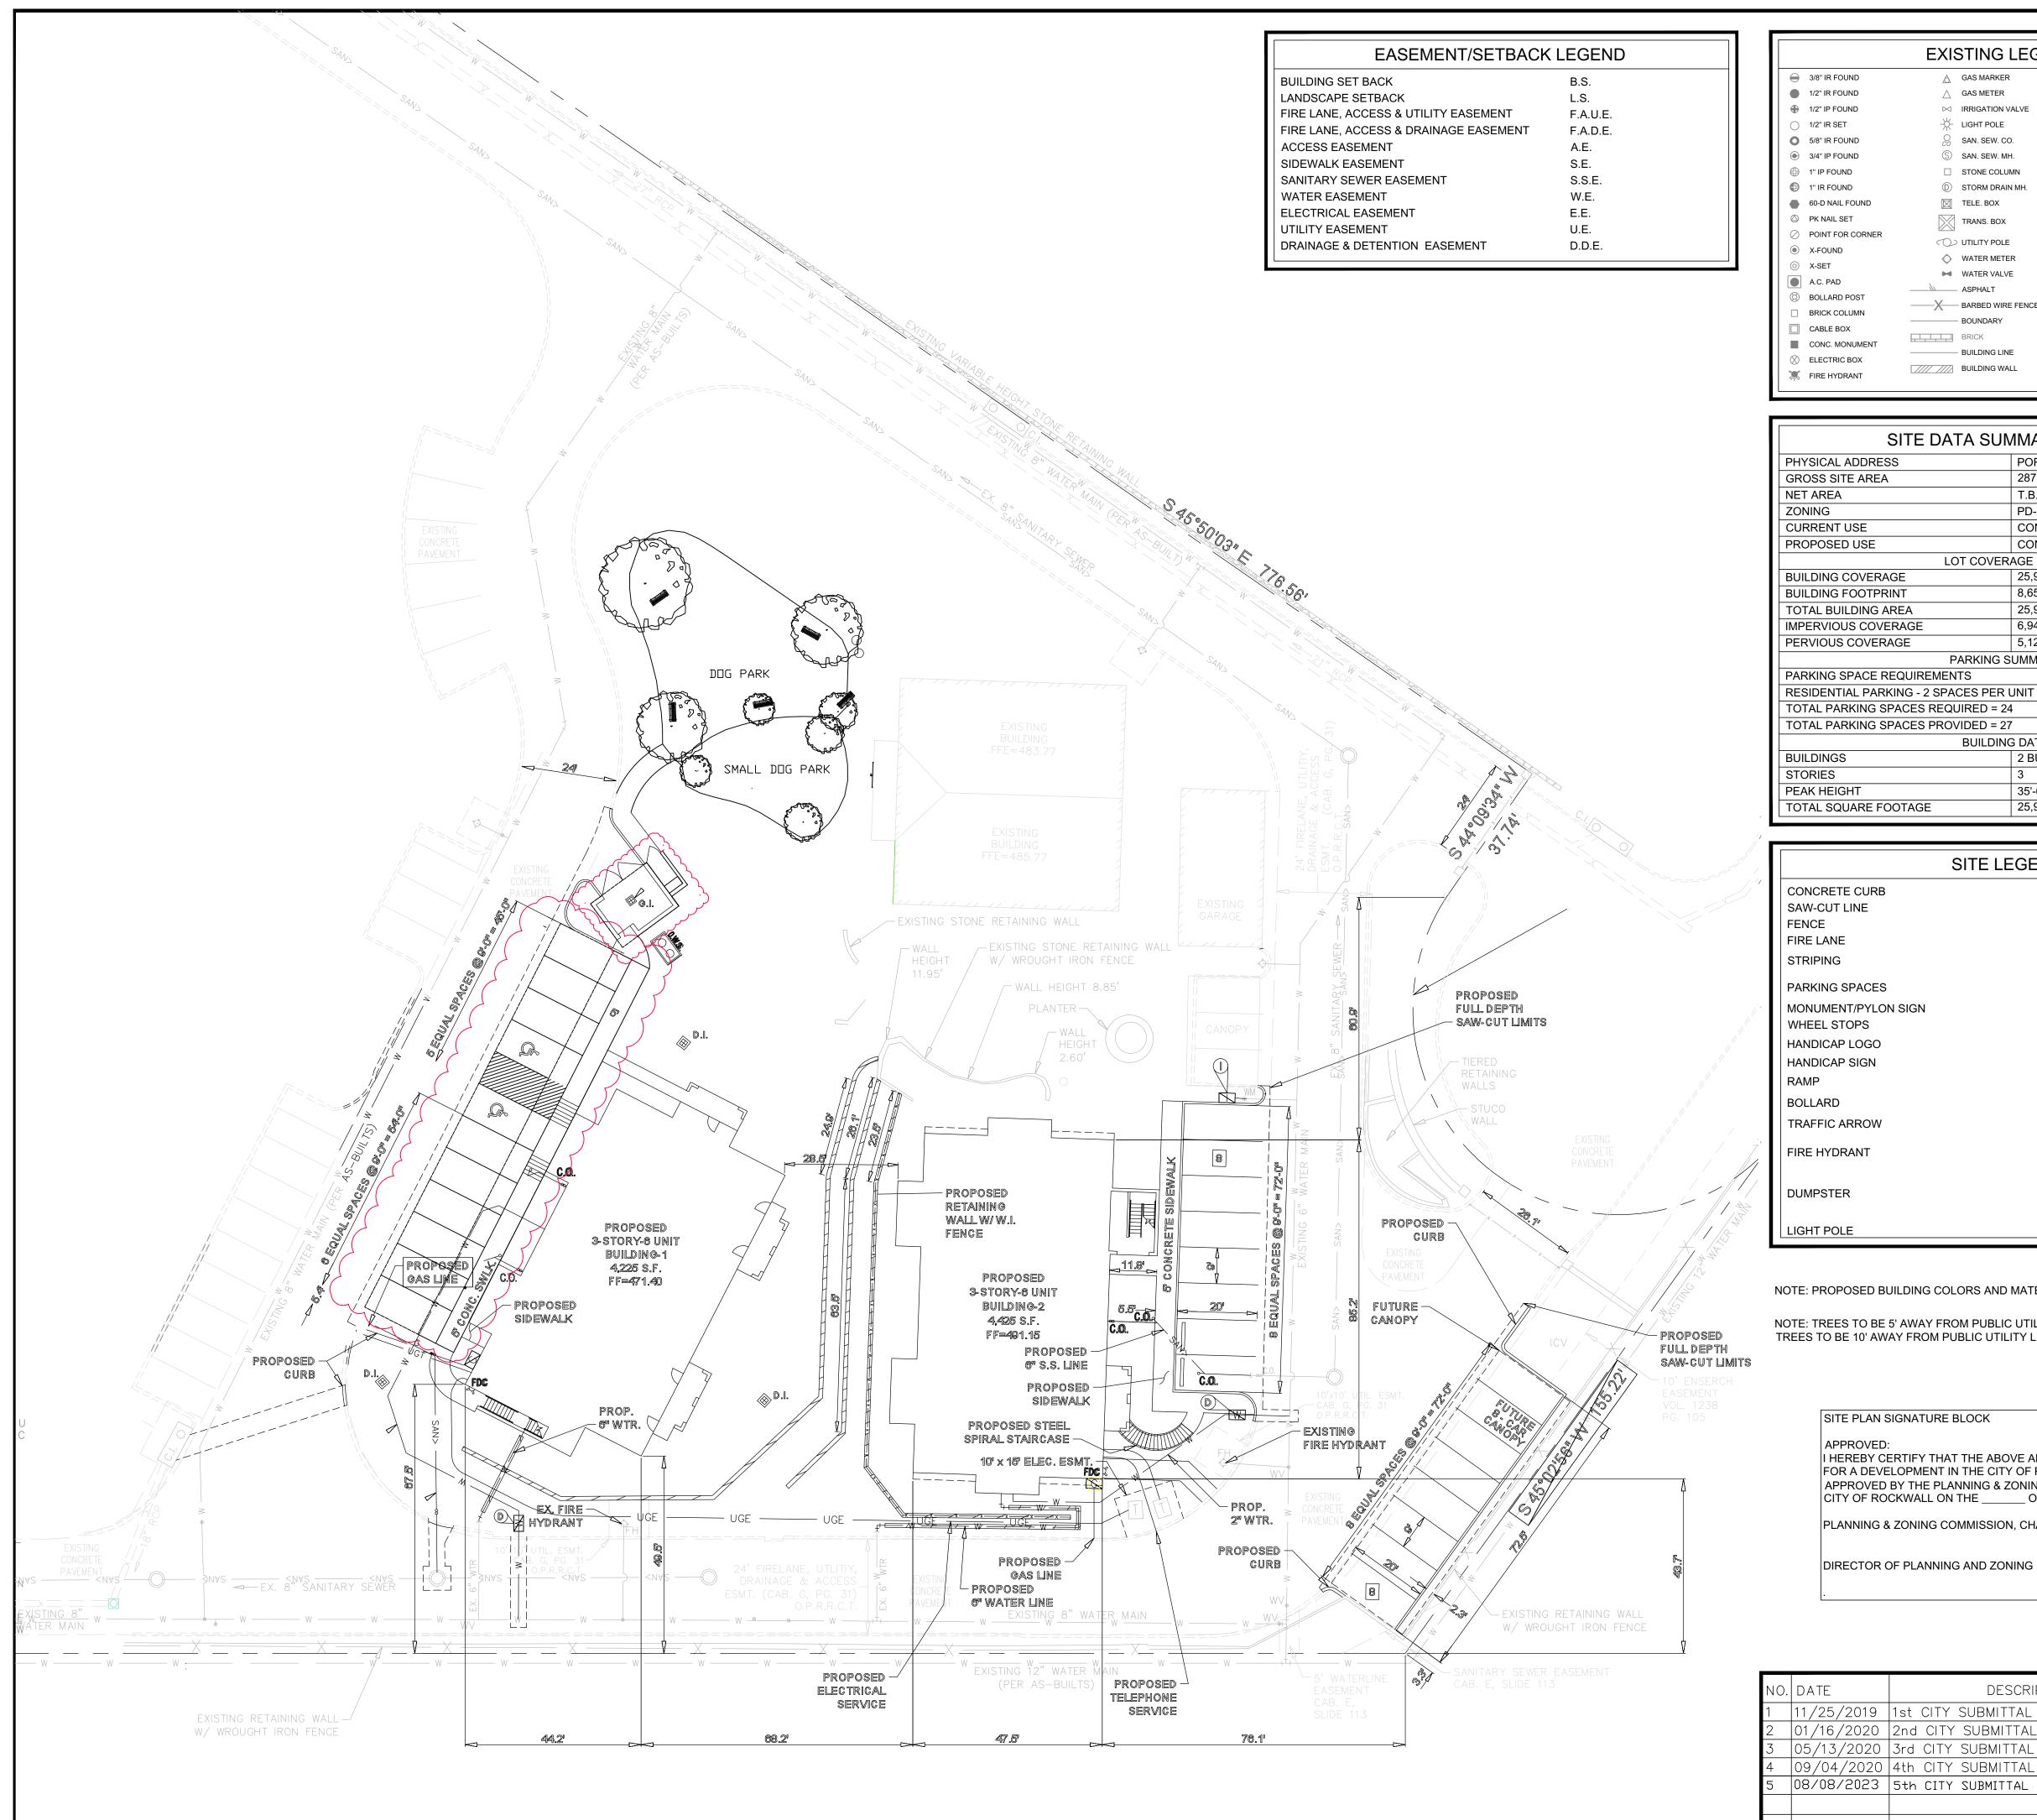

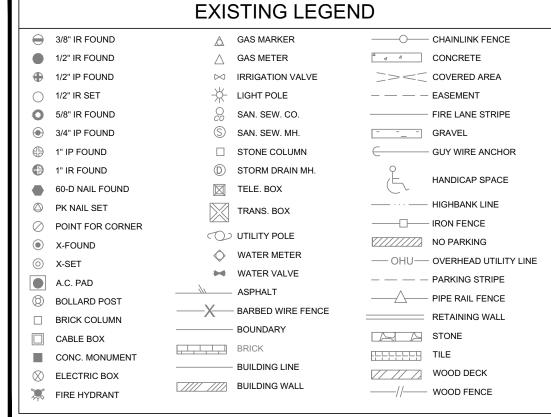

SITE DATA SUMMARY TABLE					
PHYSICAL ADDRESS PORTOFINO DRIVE					
GROSS SITE AREA	287,476 S.F. / 6.60 ACRES				
NET AREA	T.B.D.				
ZONING	PD-22				
CURRENT USE	CONDOMINIMUMS				
PROPOSED USE	CONDOMINIMUMS				
LOT	COVERAGE DATA				
BUILDING COVERAGE	25,950 S.F.				
BUILDING FOOTPRINT	8,650 S.F.				
TOTAL BUILDING AREA	25,950 S.F.				
IMPERVIOUS COVERAGE	6,946 S.F.				
PERVIOUS COVERAGE	5,127 S.F.				
PARKING SUMMARY					
PARKING SPACE REQUIREMENTS					
RESIDENTIAL PARKING - 2 SPACE	S PER UNIT				
TOTAL PARKING SPACES REQUIR	RED = 24				
TOTAL PARKING SPACES PROVID	DED = 27				
В	UILDING DATA				
BUILDINGS	2 BUILDINGS & 1 GARAGE				
STORIES	3				
PEAK HEIGHT	35'-0"				
TOTAL SQUARE FOOTAGE	25,950 S.F.				

SI	TE LEGEND
CONCRETE CURB	
SAW-CUT LINE	
FENCE	X
FIRE LANE	
STRIPING	
PARKING SPACES	9
MONUMENT/PYLON SIGN	<u> </u>
WHEEL STOPS	
HANDICAP LOGO	<u> </u>
HANDICAP SIGN	
RAMP	00000 00000 00000
BOLLARD	•
TRAFFIC ARROW	→
FIRE HYDRANT	
DUMPSTER	
LIGHT POLE	

NOTE: PROPOSED BUILDING COLORS AND MATERIALS TO MATCH EXISTING BUILDINGS.

NOTE: TREES TO BE 5' AWAY FROM PUBLIC UTILITY LINES LESS THAN 10". TREES TO BE 10' AWAY FROM PUBLIC UTILITY LINES THAT ARE 10" OR GREATER.


SITE PLAN SIGNATURE BLOCK I HEREBY CERTIFY THAT THE ABOVE AND FOREGOING SITE PLAN FOR A DEVELOPMENT IN THE CITY OF ROCKWALL, TEXAS, WAS APPROVED BY THE PLANNING & ZONING COMMISSION OF THE CITY OF ROCKWALL ON THE _____ OF _____, 2020. PLANNING & ZONING COMMISSION, CHAIRMAN


DESCRIPTION


KARTAVYA S. PATEL

97534

DIRECTOR OF PLANNING AND ZONING





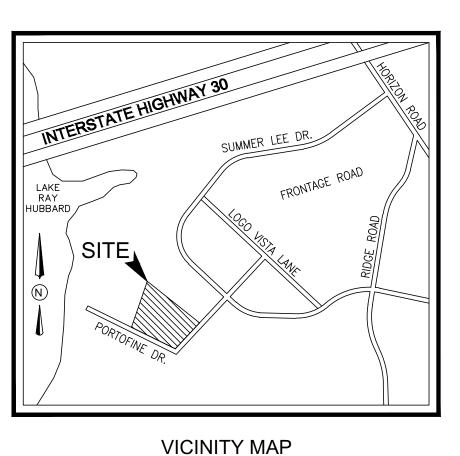

N.T.S.

GENERAL NOTES

- 1. ALL CONSTRUCTION SHALL BE IN STRICT ACCORDANCE WITH THE STANDARDS OF THE CITY OF ROCKWALL.
- 2. A PERMIT IS REQUIRED TO CUT A CITY STREET OR WORK WITHIN THE RIGHT-OF-WAY. THE PERMIT IS ISSUED BY THE PUBLIC WORKS DEPARTMENT.
- 3. THE LOCATION OF UNDERGROUND UTILITIES INDICATED ON THE PLANS IS TAKEN FROM PUBLIC RECORDS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO MAKE ARRANGEMENTS WITH THE OWNERS OF SUCH UNDERGROUND UTILITIES PRIOR TO WORKING IN THE AREA TO CONFIRM THEIR EXACT LOCATION AND TO DETERMINE WHETHER ANY ADDITIONAL UTILITIES OTHER THAN THOSE SHOWN ON THE PLANS MAY BE PRESENT. THE CONTRACTOR SHALL PRESERVE AND PROTECT ALL UNDERGROUND UTILITIES. IF EXISTING UNDERGROUND UTILITIES ARE DAMAGED, THE CONTRACTOR WILL BE RESPONSIBLE FOR THE COST OF REPAIRING THE UTILITY.
- 4. WHERE EXISTING UTILITIES OR SERVICE LINES ARE CUT, BROKEN OR DAMAGED, THE CONTRACTOR SHALL REPLACE OR REPAIR THE UTILITIES OR SERVICE LINES WITH THE SAME TYPE OF ORIGINAL MATERIAL AND CONSTRUCTION, OR BETTER, UNLESS OTHERWISE SHOWN OR NOTED ON THE PLANS, AT HIS OWN COST AND EXPENSE. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER AT ONCE OF ANY CONFLICTS IN GRADES AND ALIGNMENT.
- 5. ALL EXCAVATIONS, TRENCHING AND SHORING OPERATIONS SHALL COMPLY WITH THE REQUIREMENTS OF THE U. S. DEPARTMENT OF LABOR, OSHA, "CONST. SAFETY AND HEALTH REGULATIONS.", VOL. 29, SUBPART P. PG. 128 - 137, AND ANY AMENDMENTS THERETO.
- 6. ADEQUATE MEASURES SHALL BE TAKEN TO PREVENT EROSION. IN THE EVENT THAT SIGNIFICANT EROSION OCCURS AS A RESULT OF CONSTRUCTION THE CONTRACTOR SHALL RESTORE THE ERODED AREA TO ORIGINAL CONDITION OR BETTER.
- 7. THE CONTRACTOR SHALL RESTORE ALL AREAS DISTURBED BY CONSTRUCTION TO ORIGINAL CONDITION OR BETTER. RESTORED AREAS INCLUDE, BUT ARE NOT LIMITED TO TRENCH BACKFILL, SIDE SLOPES, FENCES, CULVERT PIPES, DRAINAGE DITCHES, DRIVEWAYS, PRIVATE YARDS AND ROADWAYS.
- 8. ANY CHANGES NEEDED AFTER CONSTRUCTION PLANS HAVE BEEN RELEASED, SHALL BE APPROVED BY THE CITY ENGINEER. THESE CHANGES MUST BE RECEIVED IN WRITING FROM THE DESIGN ENGINEER. THE DIRECTOR OF PUBLIC WORKS SHALL APPROVE ANY DEVIATIONS FROM STATE REGULATIONS.
- 9. THE CONTRACTOR SHALL PROVIDE "RED LINED" MARKED PRINTS TO THE ENGINEER PRIOR TO FINAL INSPECTION INDICATING ALL CONSTRUCTION WHICH DEVIATED FROM THE PLANS OR WAS CONSTRUCTED IN ADDITION TO THAT INDICATED ON THE PLANS.

WATER METER & SANITARY SEWER SCHEDULE								
ID TYPE SIZE NO. SAN. SEW.								
D	DOM.	1 1/2"	2	6"				
	IRR.	1"	1	N/A				

ı	
	SP2019-049
	SITE PLAN
	WATER'S EDGE AT LAKE RAY HUBBARD
	PORTOFINO DRIVE
	CITY OF ROCKWALL
	ROCKWALL COUNTY, TEXAS
	I FIANGLE



		,			,,
Plann	ning	Civil Engir	neering	Construction I	<i>Management</i>
DESIGN	DRAWN	DATE	SCALE	PROJECT NO.	SHEET NO.
KP	MLM	11/7/2019	SEE SCALE BAR	040-19	2
	S				

WEST ELEVATION 100% MASONRY 9% STONE 91% STUCCO

STUCCO SILL

- STONE WATER TABLE

STUCCO TO MATCH EXISTING Sheet metal canopy Mediterranean style to match existing cover for electrical supply and meter base


OWNER PLUTUS21 DEVELOPMENT 6116 N. CENTRAL EXPWY #700 DALLAS, TEXAS 75206

CASE #SP2020-000

© COPYRIGHT 2019 MERSHAWN ARCHITECTS, INC. NO PRINTING OR COPING IS ALLOWED WITHOUT PERMISSION FROM MERSHAWN.

- COMPLETE THE SYSTEM.
- 2. IT IS THE SUBCONTRACTOR'S RESPONSIBILITY TO REVIEW THE DOCUMENTS AND INCLUDE ALL NECESSARY ITEMS TO PROVIDE A COMPLETE OPERATIONAL SYSTEM.
- 3. ANY DISCREPANCIES NOTED BY THE SUBCONTRACTOR SHALL BE BROUGHT TO THE ATTENTIONS OF THE ARCHITECT (IN WRITING) BEFORE BIDDING THIS PROJECT.
- 4. AFTER BIDS ARE TURNED IN, THE SUBCONTRACTOR SHALL COMPLETE THE SYSTEMS AT NO ADDITIONAL COST.
- 5. PLUMBING, MECHANICAL, AND ELECTRICAL SUBCONTRACTORS ARE RESPONSIBLE FOR COORDINATING ALL COMPONENTS TO INSURE COMPLETE AND WORKING SYSTEMS EACH SUBCONTRACTOR SHALL REVIEW ALL DRAWINGS FOR COMPLIANCE.
- 6. THE ARCHITECT WILL BE RESPONSIBLE TO DETERMINE WHICH TRADE SHALL PROVIDE AND INSTALL ANY COMPONENTS MISSED FOR WORKING SYSTEMS AS NEEDED.

SHEET



PLUT E AT

3/16" = 1'-0" Scale: 04/21/2023 Project No.:


Drawn: GW Checked: WM

Designed: GW



SOUTH ELEVATION

100% MASONRY 10% STONE 90% STUCCO

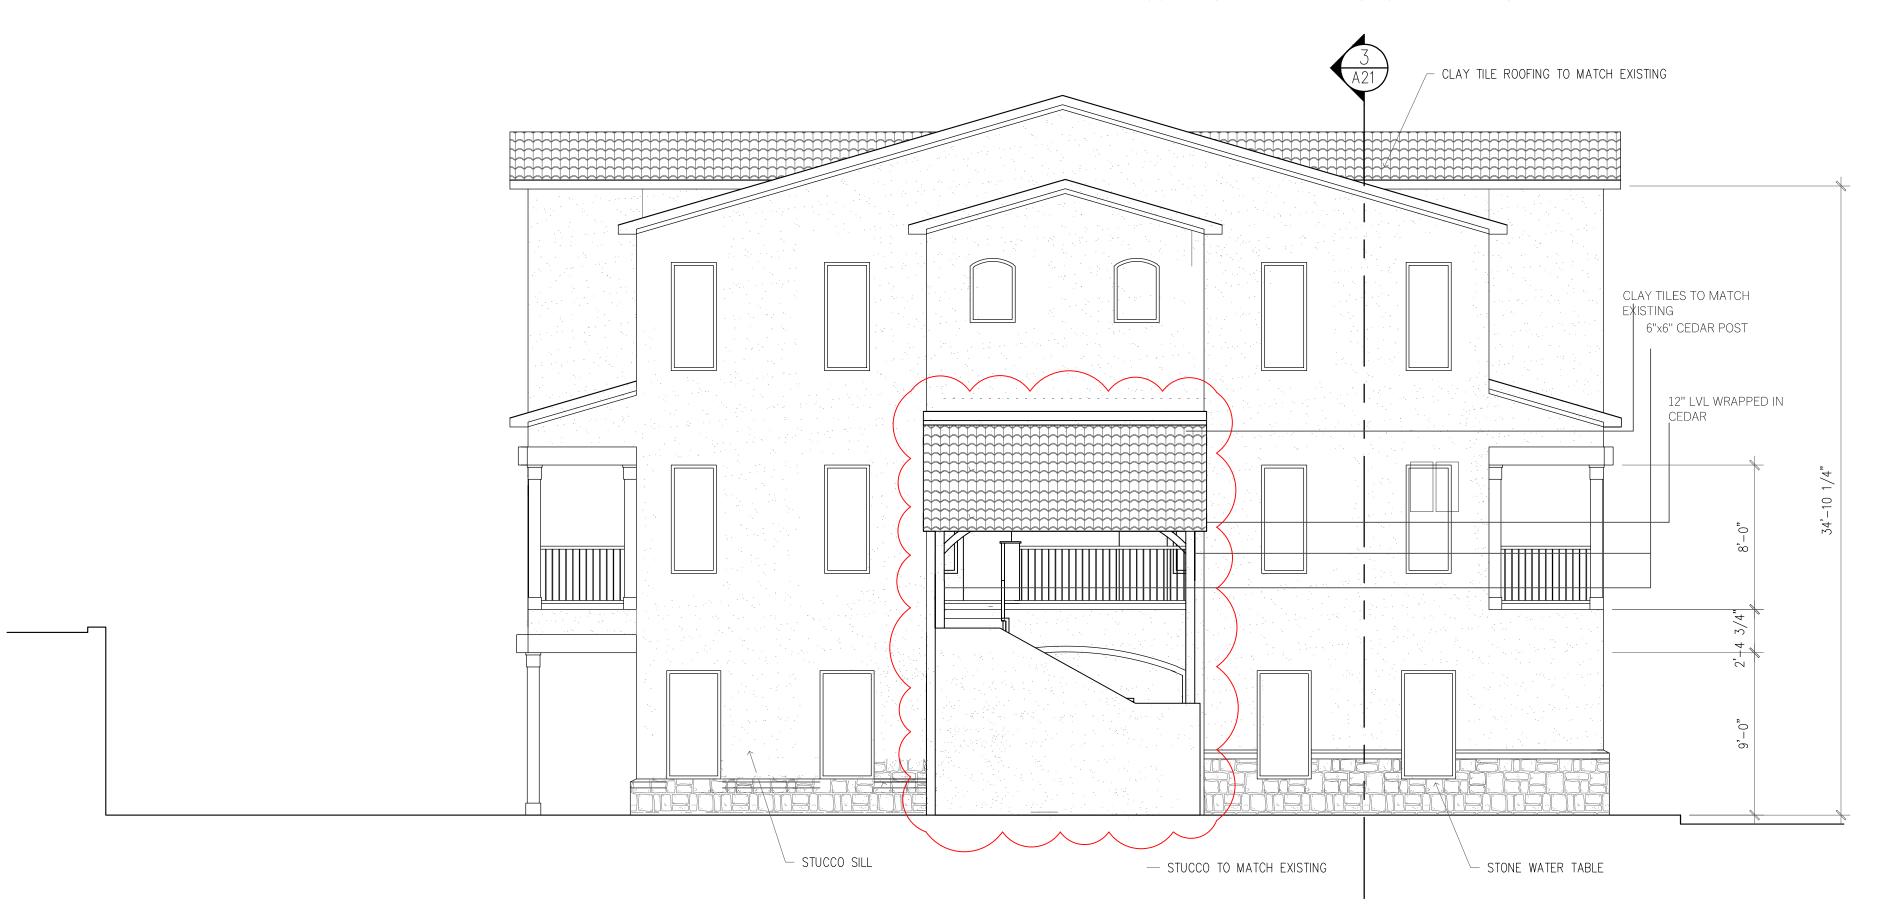

EAST ELEVATION 100% MASONRY 9% STONE 91% STUCCO NOTE: ALL NEW BUILDING ELEVATIONS SHALL MATCH COLORS TO THE EXISTING SURROUNDING BUILDINGS. THIS BUILDING HAS SIX INDIVIDUAL LIVING UNITS.

PRICING & CONSTRUCTION GENERAL NOTES:

THESE DRAWINGS ARE DIAGRAMMATIC IN NATURE AND ARE NOT INTENDED TO INDICATE EACH AND EVERY FITTING, OFFSET, OR OTHER APPURTENANCE NECESSARY TO

COMPLETE THE SYSTEM.


- 2. IT IS THE SUBCONTRACTOR'S RESPONSIBILITY TO REVIEW THE DOCUMENTS AND INCLUDE ALL NECESSARY ITEMS TO PROVIDE A COMPLETE OPERATIONAL SYSTEM.
- 3. ANY DISCREPANCIES NOTED BY THE SUBCONTRACTOR SHALL BE BROUGHT TO THE ATTENTIONS OF THE ARCHITECT (IN WRITING) BEFORE BIDDING THIS PROJECT.
- 4. AFTER BIDS ARE TURNED IN, THE SUBCONTRACTOR SHALL COMPLETE THE SYSTEMS AT NO ADDITIONAL COST.
- 5. PLUMBING, MECHANICAL, AND ELECTRICAL SUBCONTRACTORS ARE RESPONSIBLE FOR COORDINATING ALL COMPONENTS TO INSURE COMPLETE AND WORKING SYSTEMS EACH SUBCONTRACTOR SHALL REVIEW ALL DRAWINGS FOR COMPLIANCE.
- 6. THE ARCHITECT WILL BE RESPONSIBLE TO DETERMINE WHICH TRADE SHALL PROVIDE AND INSTALL ANY COMPONENTS MISSED FOR WORKING SYSTEMS AS NEEDED.

© COPYRIGHT 2019 MERSHAWN ARCHITECTS, INC. NO PRINTING OR COPING IS ALLOWED

OWNER PLUTUS21 DEVELOPMENT 6116 N. CENTRAL EXPWY #700 DALLAS, TEXAS 75206

CASE #SP2020-000

WITHOUT PERMISSION FROM MERSHAWN.



, **T** m ,

3/16" = 1'-0" Scale: 04/21/2023 Project No.: 190602 Designed: GW

Drawn: GW Checked: WM SHEET















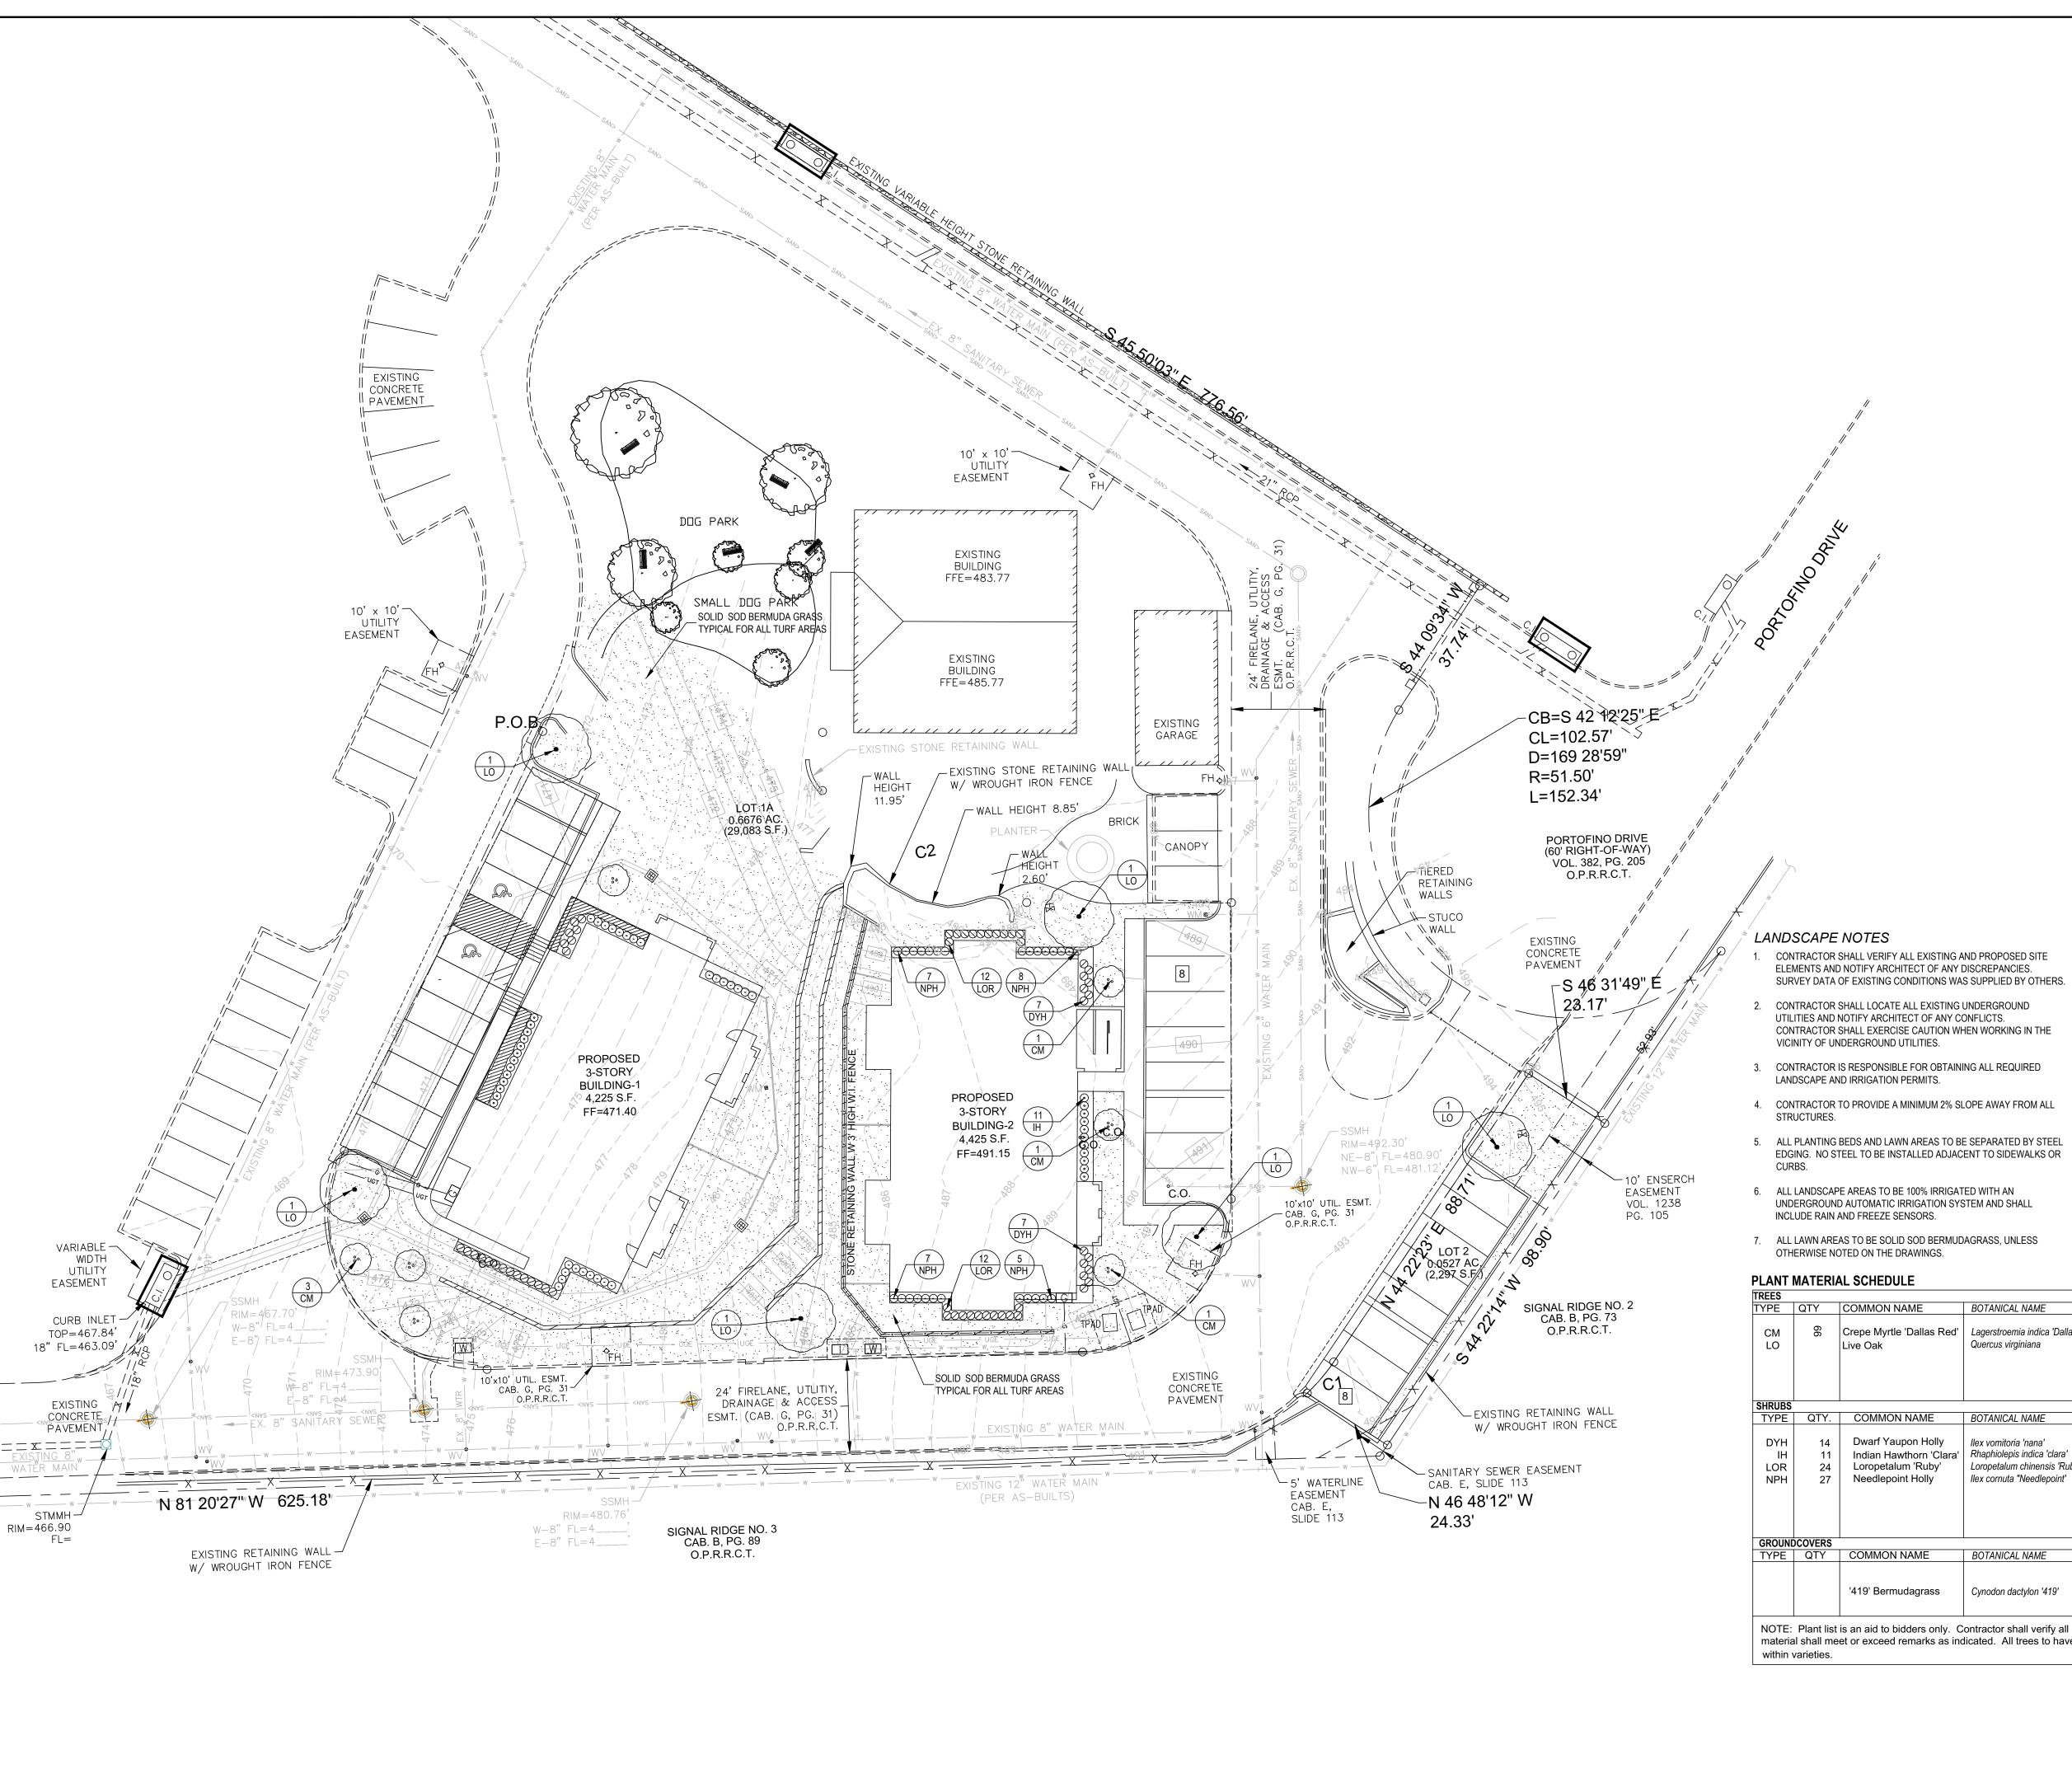

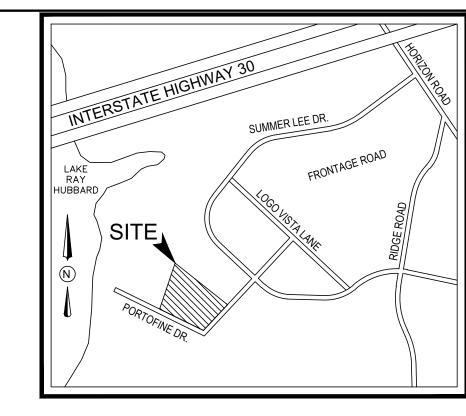

VICINITY MAP

GENERAL LAWN NOTES


- 1. FINE GRADE AREAS TO ACHIEVE FINAL CONTOURS INDICATED ON CIVIL
- ADJUST CONTOURS TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.
- 3. ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFT IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE. CONTRACTOR TO COORDINATE OPERATIONS WITH ON-SITE CONSTRUCTION MANAGER.
- IMPORTED TOPSOIL SHALL BE NATURAL, FRIABLE SOIL FROM THE REGION, KNOWN AS BOTTOM AND SOIL, FREE FROM LUMPS, CLAY, TOXIC SUBSTANCES, ROOTS, DEBRIS, VEGETATION, STONES, CONTAINING NO SALT AND BLACK TO BROWN IN COLOR.
- ALL LAWN AREAS TO BE FINE GRADED, IRRIGATION TRENCHES COMPLETELY SETTLED, AND FINISH GRADE APPROVED BY THE OWNER'S CONSTRUCTION MANAGER OR ARCHITECT PRIOR TO INSTALLATION.
- ALL ROCKS 3/4" DIAMETER AND LARGER, DIRT CLODS, STICKS, CONCRETE SPOILS, ETC. SHALL BE REMOVED PRIOR TO PLACING TOPSOIL AND ANY LAWN INSTALLATION
- 7. CONTRACTOR SHALL PROVIDE (1") ONE INCH OF IMPORTED TOPSOIL ON ALL AREAS TO RECEIVE LAWN.

SOLID SOD NOTES

- FINE GRADE AREAS TO ACHIEVE FINAL CONTOURS INDICATED. LEAVE AREAS TO RECEIVE TOPSOIL 3" BELOW FINAL DESIRED GRADE IN PLANTING AREAS AND 1" BELOW FINAL GRADE IN TURF
- ADJUST CONTOURS TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.
- 3. ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFT IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE. CONTRACTOR TO COORDINATE OPERATIONS WITH ON-SITE CONSTRUCTION
- CONTRACTOR TO COORDINATE WITH ON-SITE CONSTRUCTION MANAGER FOR AVAILABILITY OF EXISTING TOPSOIL.
- PLANT SOD BY HAND TO COVER INDICATED AREA COMPLETELY. INSURE EDGES OF SOD ARE TOUCHING. TOP DRESS JOINTS BY HAND WITH TOPSOIL TO FILL VOIDS.
- ROLL GRASS AREAS TO ACHIEVE A SMOOTH, EVEN SURFACE, FREE FROM UNNATURAL UNDULATIONS.
- WATER SOD THOROUGHLY AS SOD OPERATION PROGRESSES.
- CONTRACTOR SHALL MAINTAIN ALL LAWN AREAS UNTIL FINAL ACCEPTANCE. THIS SHALL INCLUDE, BUT NOT LIMITED TO: MOWING, WATERING, WEEDING, CULTIVATING, CLEANING AND REPLACING DEAD OR BARE AREAS TO KEEP PLANTS IN A VIGOROUS, HEALTHY CONDITION.
- CONTRACTOR SHALL GUARANTEE ESTABLISHMENT OF AN ACCEPTABLE TURF AREA AND SHALL PROVIDE REPLACEMENT FROM LOCAL SUPPLY IF NECESSARY.
- IF INSTALLATION OCCURS BETWEEN SEPTEMBER 1 AND MARCH 1, ALL SOD AREAS TO BE OVER-SEEDED WITH WINTER RYEGRASS, AT A RATE OF (4) POUNDS PER ONE THOUSAND (1000) SQUARE FEET.

NT	MATERIAL	SCHEDULE

TYPE	QTY	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
CM LO	66	Crepe Myrtle 'Dallas Red' Live Oak	Lagerstroemia indica 'Dallas Red' Quercus virginiana	6' ht. 3" cal.	container, 3 or 5 trunks, 4' spread min.,tree forn container, 13' ht., 5' spread, 5' clear straight truik
SHRUBS					
TYPE	QTY.	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
DYH IH LOR NPH	14 11 24 27	Dwarf Yaupon Holly Indian Hawthorn 'Clara' Loropetalum 'Ruby' Needlepoint Holly	llex vomitoria 'nana' Rhaphiolepis indica 'clara' Loropetalum chinensis 'Ruby' Ilex cornuta "Needlepoint'	5 gal. 5 gal. 5 gal. 5 gal.	container, 18" ht., 18" spread container, 20" ht., 20" spread container, 20" ht., 20" spread container , 24" ht., 20" spread
GROUNE	COVERS			•	
TYPE	QTY	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
		'419' Bermudagrass	Cynodon dactylon '419'		Solid Sod refer to notes

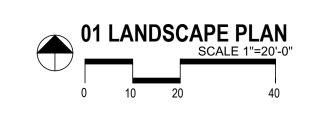

LANDSCAPE ARCHITECT STUDIO GREEN SPOT, INC 1784 W. McDERMOTT DR. SUITE 110 ALLEN, TEXAS 75013 (469) 369-4448 CHRIS@STUDIOGREENSPOT



$\mathbf{\Omega}$ $\mathbf{\Omega}$ AKE GE

Ш

'ATER'

DRIVE TEXAS

<u>N</u>

ISSUE: FOR APPROVAL 11.21.2019

DATE: 11.21.2019

SHEET NAME: LANDSCAPE PLAN

SHEET NUMBER:

SECTION 02900 - LANDSCAPE

PART 1 - GENERAL

REFERENCED DOCUMENTS

Refer to bidding requirements, special provisions, and schedules for additional requirements.

DESCRIPTION OF WORK

Work included: Furnish all supervision, labor, materials, services, equipment and appliances required to complete the work covered in conjunction with the landscaping covered in these specifications and landscaping plans, including:

- Planting (trees, shrubs, and grass)
- Bed preparation and fertilization Notification of sources
- Water and Maintenance until final acceptance Guarantee

REFERENCE STANDARDS

ART 3 - EXECUTION

C. Grass Areas:

INSTALLATION

materials.

BED PREPARATION & FERTILIZATION

All planting areas shall be conditioned as follows:

batter board against the bed areas.

- American Standard for Nursery Stock published by American Association of Nurserymen. 27 October 1980, Edition; by American National Standards Institute, Inc. (Z60.1) – plant
- American Joint Committee on Horticultural Nomenclature: 1942 Edition of Standardized
- Texas Association of Nurserymen, Grades and Standards.
- Hortis Third, 1976 Cornell University

NOTIFICATION OF SOURCES AND SUBMITTALS

- The Contractor shall, within ten (10) days following acceptance of bid, notify the Architect/Owner of the sources of plant materials and bed preparation required for the
- Samples: Provide representative quantities of sandy loam soil, mulch, bed mix material, gravel, and crushed stone. Samples shall be approved by Architect before use on
- Product Data: Submit complete product data and specifications on all other specified
- Submit three representative samples of each variety of ornamental trees, shrubs, and groundcover plants for Architect's approval. When approved, tag, install, and maintain as representative samples for final installed plant materials.
- File Certificates of Inspection of plant material by state, county, and federal authorities with Architect, if required

Landscape Contractor to inspect all existing conditions and report any deficiencies to the

Prepare new planting beds by scraping away existing grass and weeds as necessary.

Till existing soil to a depth of six (6") inches prior to placing compost and fertilizer.

compost and till into a depth of six (6") inches of the topsoil. Apply organic fertilizer

such as Sustane or Green Sense at the rate of twenty (20) pounds per one thousand

Apply fertilizer as per manufacturers recommendations. Add six (6") inches of

3. Backfill for tree pits shall be as follows: Use existing top soil on site (use imported

1. Areas to be Solid Sod Bermudagrass: Blocks of sod should be laid joint to joint,

topsoil where they are evidently gaped open, then watered thoroughly.

topsoil as needed) free from large clumps, rocks, debris, caliche, subsoils, etc.,

(staggered joints) after fertilizing the ground first. Roll grass areas to achieve a smooth, even surface. The joints between the blocks of sod should be filled with

2. Areas to be Hydromulch Common Bermudagrass: Hydromulch with bermudagrass

Maintenance of plant materials shall begin immediately after each plant is delivered to the

Plant materials shall be delivered to the site only after the beds are prepared and area

ready for planting. All shipments of nursery materials shall be thoroughly protected from

the drying winds during transit. All plants which cannot be planted at once, after delivery

to the site, shall be well protected against the possibility of drying by wind and sun. Balls

of earth of B & B plants shall be kept covered with soil or other acceptable material. All

Notify the Landscape Architect for inspection and approval of all positioning of plant

Excavate pits with vertical sides and horizontal bottom. Tree pits shall be large enough to

permit handling and planting without injury to balls of earth or roots and shall be of such

depth that, when planted and settled, the crown of the plant shall bear the same

relationship to the finish grade as it did to soil surface in original place of growth.

plants remain the property of the Contractor until final acceptance.

Position the trees and shrubs in their intended location as per plan

site and shall continue until all construction has been satisfactorily accomplished.

seed at a rate of two (2) pounds per one thousand (1,000) square feet. Use a 4' x 8'

All planting areas shall receive a two (2") inch layer of specified mulch.

placed in nine (9") inch layers and watered in thoroughly.

F. Soil Analysis: Provide sandy loam soil analysis if requested by the Architect.

JOB CONDITIONS

- General Contractor to complete the following punch list: Prior to Landscape Contractor initiating any portion of landscape installation, General Contractor shall leave planting bed areas three (3") inches below finish grade of sidewalks, drives and curbs as shown on the drawings. All lawn areas to receive solid sod shall be left one (1") inch below the finish grade of sidewalks, drives, and curbs. All construction debris shall be removed prior to Landscape Contractor beginning any work.
- B. General Contractor shall provide topsoil as described in Section 02200 Earthwork.
- Storage of materials and equipment at the job site will be at the risk of the Landscape Contractor. The Owner cannot be held responsible for theft or damage.

MAINTENANCE AND GUARANTEE

Maintenance:

- 1. The Landscape Contractor will be held responsible for the maintenance of all work from the time of planting until final acceptance by the Owner. No trees, shrubs, groundcover or grass will be accepted unless they show a healthy growth and
- satisfactory foliage conditions. Maintenance shall include watering of trees and plants, cultivation, weeding spraying, edging, pruning of trees, mowing of grass, cleaning up and all other work necessary of maintenance.
- 3. A written notice requesting final inspection and acceptance should be submitted to the Owner at least seven (7) days prior to completion. An on-site inspection by
- Owner and Landscape Contractor will be completed prior to written acceptance. 4. After final acceptance of installation, the Landscape Contractor will not be required to do any of the above listed work.

B. Guarantee:

- 1. Trees shall be guaranteed for a twelve (12) month period after acceptance. Shrubs and groundcover shall be guaranteed for twelve (12) months. The Contractor shall replace all dead materials as soon as weather permits and upon notification of the Owner. Plants, including trees, which have partially died so that shape, size, or symmetry has been damaged, shall be considered subject to replacement. In such
- cases, the opinion of the Owner shall be final. a. Plants used for replacement shall be of the same size and kind as those originally planted and shall be planted as originally specified. All work, including materials, labor and equipment used in replacements, shall carry a twelve (12) month guarantee. Any damage, including ruts in lawn or bed areas, incurred as a result of making replacements shall be immediately
- b. At the direction of the Owner, plants may be replaced at the start of the next year's planting season. In such cases, dead plants shall be removed from the
- premises immediately. c. When plant replacements are made, plants, soil mix, fertilizer and mulch are to be utilized as originally specified and reinspected for full compliance with Contract requirements. All replacements are to be included under "Work" of this section.

Shrub and tree pits shall be no less than two (2') feet, twenty-four (24") inches, wider than

the lateral dimension of earth ball and six (6") inches deeper than it's vertical dimension.

Remove and haul from site all rocks and stones over one (1") inch in diameter. Plants

Dig a wide, rough sided hole exactly the same depth as the height of the ball, especially a

Percolation Test: Fill the hole with water. If the water level does not percolate within 24

Backfill only with 5 parts existing soil or sandy loam and 1 part bed preparation. When

the hole is dug in solid rock, topsoil from the same area should not be used. Carefully

as well as all nylon, plastic string and wire mesh. Container trees will usually be pot

settle by watering to prevent air pockets. Remove the burlap from the top 1/3 of the ball.

Mulch the top of the ball. Do not plant grass all the way to the trunk of the tree. Leave the

area above the top of the ball and mulch with at least two (2") inches of specified mulch.

Obstruction below ground: In the event that rock, or underground construction work or

section, alternate locations may be selected by the Owner. Where locations cannot be

properly set at the required grade. The work of this section shall include the removal from

obstructions are encountered in any plant pit excavation work to be done under this

changed, the obstructions shall be removed to a depth of not less than three (3') feet

below grade and no less than six (6") inches below the bottom of ball when plant is

the site of such rock or underground obstructions encountered at the cost of the

Trees and large shrubs shall be staked as site conditions require. Position stakes to

Pruning and Mulching: Pruning shall be directed by the Architect and shall be pruned in

accordance with standard horticultural practice following Fine Pruning, Class I pruning

All plant beds and trees to be mulched with a minimum settled thickness of two (2")

stand pipe per tree planting detail as approved by the Landscape Architect

hours, the tree needs to move to another location or have drainage added. Install a PVC

the surface of the ground. The sides of the hole should be rough and jagged, never slick

should be thoroughly moist before removing containers.

bound, if so follow standard nursery practice of 'root scoring'.

J. Do not wrap trees.

K. Do not over prune.

inches over the entire bed or pit.

secure tree against seasonal prevailing winds.

standards provided by National Arborist Association.

Landscape Contractor.

- 2. The Owner agrees that for the guarantee to be effective, he will water plants at least twice a week during dry periods and cultivate beds once a month after final
- 3. The above guarantee shall not apply where plants die after acceptance because of injury from storms, hail, freeze, insects, diseases, injury by humans, machines or
- 4. Acceptance for all landscape work shall be given after final inspection by the Owner provided the job is in a completed, undamaged condition, and there is a stand of grass in all lawn areas. At this time, the Owner will assume maintenance on the accepted work.
- Repairs: Any necessary repairs under the Guarantee must be made within ten (10) days after receiving notice, weather permitting, and in the event the Landscape Contractor does not make repairs accordingly, the Owner, without further notice to Contractor, may provide materials and men to make such repairs at the expense of the Landscape

QUALITY ASSURANCE

Contractor.

- General: Comply with applicable Federal, State, County and Local regulations governing landscape materials and work
- Personnel: Employ only experienced personnel who are familiar with the required work. Provide full time supervision by a qualified foreman acceptable to Landscape Architect.
- Selection of Plant Material:
- 1. Make contact with suppliers immediately upon obtaining notice of contract acceptance to select and book materials. Develop a program of maintenance (pruning and fertilization) which will insure the purchased materials will meet and/or exceed project specifications
- 2. Landscape Architect will provide a key identifying each tree location on site. Written verification will be required to document material selection, source and delivery schedules to site.
- 3. Owner and/or Architect shall inspect all plant materials when reasonable at place of growth for compliance with requirements for genus, species, cultivar/variety, size and 4. Owner and/or Architect retains the right to further inspect all plant material upon arrival at the site and during installation for size and condition of root balls, limbs,
- branching habit, insects, injuries, and latent defects. 5. Owner and/or Architect may reject unsatisfactory or defective material at any time during the process of work. Remove rejected materials from the site immediately. Plants damaged in transit or at job site shall be rejected.

PRODUCT DELIVERY, STORAGE AND HANDLING

Preparation:

- Balled and Burlapped (B&B) Plants: Dig and prepare shipment in a manner that will not damage roots, branches, shape, and future development.
- 2. Container Grown Plants: Deliver plants in rigid container to hold ball shape and

- 1. Deliver packaged materials in sealed containers showing weight, analysis and name of manufacturer. Protect materials from deterioration during delivery and while stored
- 2. Deliver only plant materials that can be planted in one day unless adequate storage and watering facilities are available on job site.
- 3. Protect root balls by heeling in with sawdust or other approved moisture retaining material if not planted within 24 hours of delivery.
- 4. Protect plants during delivery to prevent damage to root balls or desiccation of leaves. Keep plants moist at all times. Cover all materials during transport. 5. Notify Architect of delivery schedule 72 hours in advance so plant material may be
- observed upon arrival at job site. 6. Remove rejected plant material immediately from site.
- 7. To avoid damage or stress, do not lift, move, adjust to plumb, or otherwise manipulate plants by trunk or stems.

PART 2 - PRODUCTS

2.1 PLANTS

- General: Well-formed No. 1 grade or better nursery grown stock. Listed plant heights are from tops of root balls to nominal tops of plants. Plant spread refers to nominal outer width of the plant, not to the outer leaf tips. Plants will be individually approved by the Architect and his decision as to their acceptability shall be final.
- Quantities: The drawings and specifications are complimentary. Anything called for on one and not the other is as binding as if shown and called for on both. The plant schedule

is an aid to bidders only. Confirm all quantities on plan.

- C. Quality and size: Plant materials shall conform to the size given on the plan, and shall be healthy, symmetrical, well-shaped, full branched, and well rooted. The plants shall be free from injurious insects, diseases, injuries to the bark or roots, broken branches, objectionable disfigurements, insect eggs and larvae and are to be of specimen quality.
- Approval: All plant materials shall be subject to the approval of the Owner. All plants which are found unsuitable in growth, or in any unhealthy, badly shaped, or undersized condition, will be rejected by the Landscape Architect, either before or after planting, and shall be removed at the expense of the Landscape Contractor and replaced with acceptable plants as specified.
- Trees shall be healthy, full-branched, well-shaped and shall meet the trunk diameter and height requirements of the plant schedule. Balls shall be firm, neat, slightly tapered, and well wrapped in burlap. Any tree loose in the ball or with broken ball at time of planting will be rejected. Balls shall be ten (10") inched in diameter for each one (1") inch of trunk diameter, Measured six (6") inched above ball. Nomenclature conforms to the customary nursery usage: for clarification, the term "multi-trunk" defines a plant having three (3) or more trunks of nearly equal diameter
- Pruning: All pruning of trees and shrubs, as directed by the Landscape Architect, shall be executed by the Landscape Contractor at no additional cost to the Owner

A = ROW SPACING

B = ON CENTER SPACING

INDICATED ON PLANT LIST

MULCH IN BED PRIOR TO

SPACE PLANTS IN A TRIANGULAR

PATTERNAS SHOWN, SPACED EQUALLY FROM EACHOTHER AT SPACING

2" MULCH DOUBLE SHREDDED HARDWOOD

PLANTING GROUNDCOVER/ANNUALS.

PREPARE GROUNDCOVER

BED BY TILLING ENTIRE BED-

AREA. PROVIDE SOIL MIX

AS DEFINED IN THE LANDSCAPE

2.2 SOIL PREPARATION MATERIALS

- A. Sandy Loam:
- 1. Friable, fertile, dark, loamy soil, free of clay lumps, subsoil, stones and other extraneous material and reasonably free of weeds and foreign grasses. Loam containing Dallasgrass or Nutgrass shall be rejected.
- 2. Physical properties as follows: Clay - between 7-27 percent Silt – between 15-25 percent
- Sand less than 52 percent Organic matter shall be 3%-10% of total dry weight. 4. If requested, provide a certified soil analysis conducted by an approved soil testing laboratory verifying that sandy loam meets the above requirements.
- Organic Material: Compost with a mixture of 80% vegetative matter and 20% animal
- waste. Ingredients should be a mix of course and fine textured material.


Gro Municipal Mix as supplied by Soil Building Systems, Dallas, Texas or approved equal.


Mulch: Double Shredded Hardwood Mulch, partially decomposed, dark brown. Living


- Premixed Bedding Soil as supplied by Vital Earth Resources, Gladewater, Texas; Professional Bedding Soil as supplied by Living Earth Technology, Dallas, Texas or Acid
- D. Sharp Sand: Sharp sand must be free of seeds, soil particles and weeds.
- Earth Technologies or approved equal. Organic Fertilizer: Fertilaid, Sustane, or Green Sense or equal as recommended for
- required applications. Fertilizer shall be delivered to the site in original unopened containers, each bearing the manufacturer's guaranteed statement of analysis.
- Commercial Fertilizer: 10-20-10 or similar analysis. Nitrogen source to be a minimum 50% slow release organic Nitrogen (SCU or UF) with a minimum 8% sulphur and 4% iron, plus micronutrients.
- B. Peat: Commercial sphagnum peat moss or partially decomposed shredded pine bark or other approved organic material.

MISCELLANEOUS MATERIALS

- A. Steel Edging: Shall be Ryerson "Estate Curbing", 1/8" x 4" with stakes 4' on center.
- B. Staking Material for Shade Trees:
- 1. Post: Studded T-Post, #1 Armco with anchor plate; 6'-0" length; paint green. 2. Wire: 12 gauge, single strand, galvanized wire. 3. Rubber hose: 2 ply, fiber reinforced hose, minimum ½ inch inside diameter. Color:
- Gravel: Washed native pea gravel, graded 1 in. to 1-1/2 in.
- Filter Fabric: Mirafi 140N by Celanese Fibers Marketing Company, available at Loftland Co., (214) 631-5250 or approved equal.

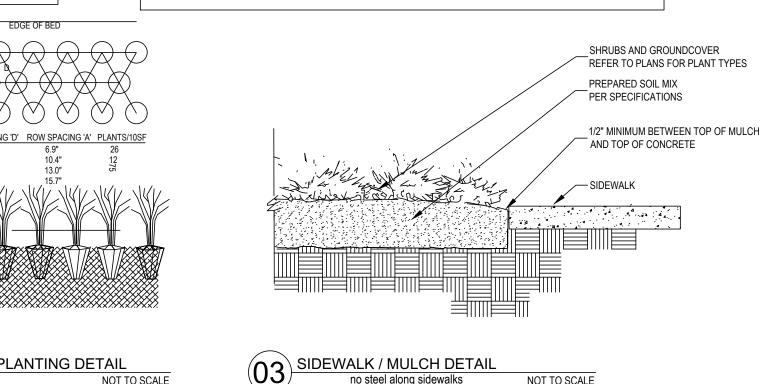

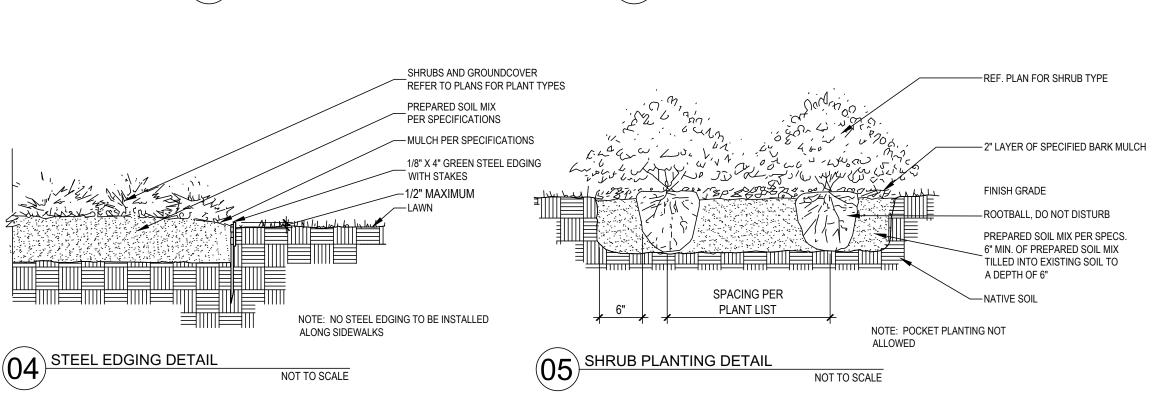

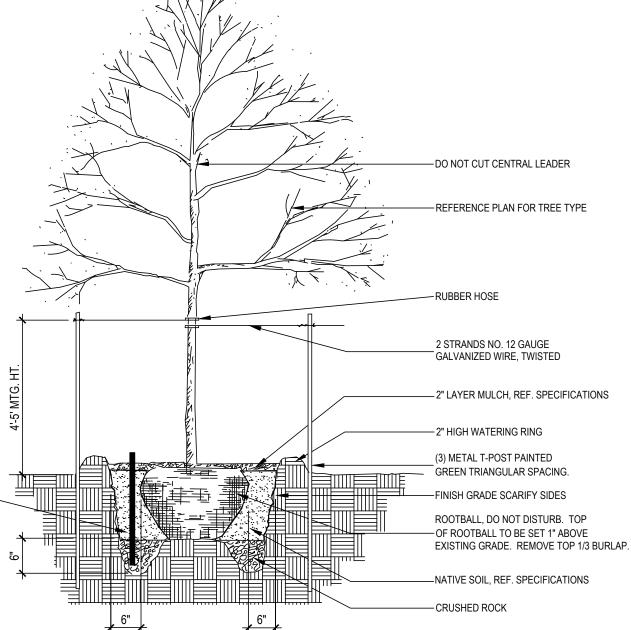

1. Dead wood or suckers and broken badly bruised branches shall be removed. General tipping of the branched is not permitted. Do not cut terminal branches. Pruning shall be done with clean, sharp tools. Immediately after planting operations are completed, all tree pits shall be covered with a layer of organic material two (2") inches in depth. This limit of the organic material

- Steel Curbing Installation: 1. Curbing shall be aligned as indicated on plans. Stake out limits of steel curbing and obtain Owners approval prior to installation.
- All steel curbing shall be free of kinks and abrupt bends. Top of curbing shall be 3/4" maximum height above grade. . Stakes are to be installed on the planting bed side of the curbing, as opposed to the
- Do not install steel edging along sidewalks.

3. Cut steel edging at 45 degree angle where edging meets sidewalk. CLEANUP AND ACCEPTANCE

Cleanup: During the work, the premises shall be kept neat and orderly at all times. Storage areas for all materials shall be so organized that they, too, are neat and orderly. All trash and debris shall be removed from the site as work progresses. Keep paved areas clean by sweeping or hosing at end of each days work.

END OF SECTION

4" DIA. PERFORATED PVC PIPE W/ CAP -PAINTED BLACK NOTE: LOCATE STAKES OUTSIDE OF TREE WELL. POSITION STAKES OF ROOTBALL TO SECURE TREE AGAINST SEASONAL PREVAILING WINDS.

TREE PLANTING DETAIL NOT TO SCALE

STUDIO GREEN SPOT, INC 1784 W. McDERMOTT DR. SUITE 110 ALLEN, TEXAS 75013 (469) 369-4448 CHRIS@STUDIOGREENSPOT.

LANDSCAPE ARCHITECT



 $\mathbf{\Omega}$ $\mathbf{\omega}$ 5 4 C Ш **ATE**

DRIVI TEXA

O O

4

ISSUE: FOR APPROVAL 11.21.2019


 \geq

11.21.2019

SHEET NAME:

LANDSCAPE SPECIFICATIONS

SHEET NUMBER

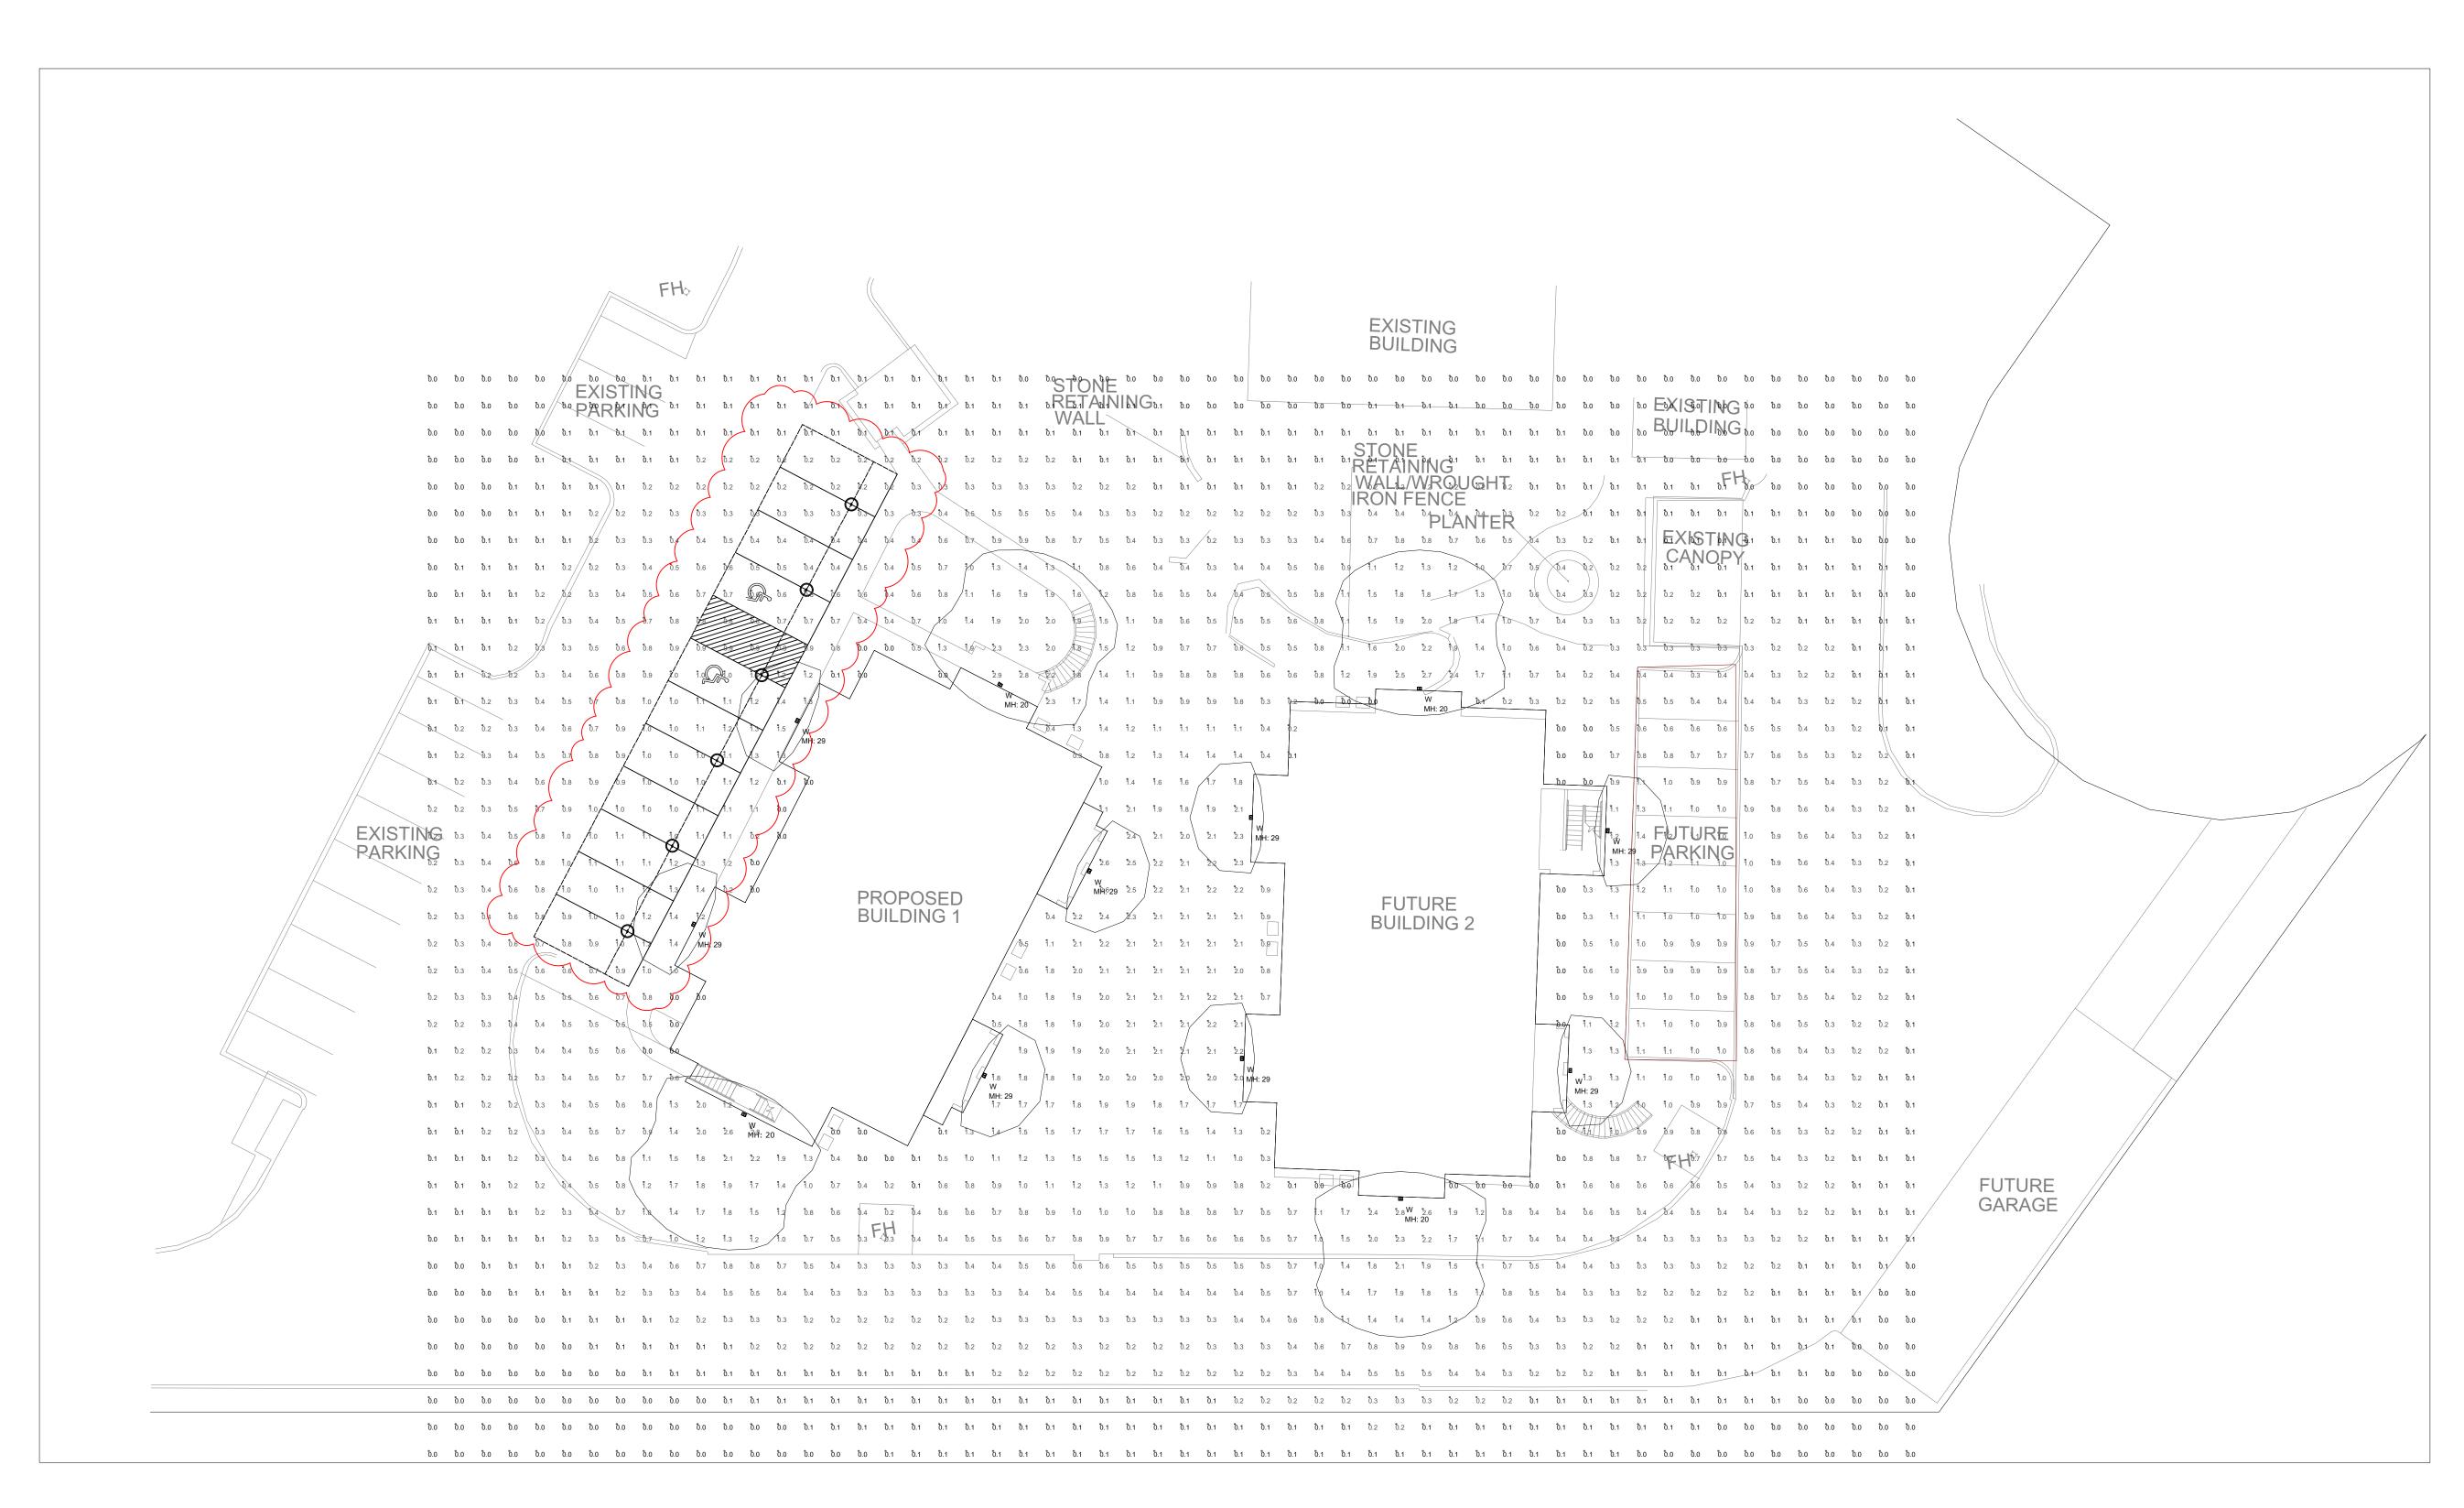

Luminair	Luminaire Schedule									
Symbol	Type	Qty	Manufacturer / Catalog Number	Total Lumen Output	Total Input Watts	Ballast Factor	Light Lost Factor	User Defined Factor		
•	W	12	LITHONIA WDGE2 LED P3 40K 80CRI VW VOLTAGE MOUNTING FINISH	3214	22.55	1.000	0.808	1.000		
O		6	LUXRITE LED Canopy Light LED 28W 3CCT 3000K	3360	28		0.70	1.000		


Calculation Grid Location	Calc. Height (Ft.)	Units	Avg	Max	Min	Avg/Min
GRADE_Planar	0	Fc	0.53	2.9	0.0	N.A.
PARKING1		Fc	0.83	1.4	0.1	8.30
PARKING2		Fc	0.90	1.4	0.3	3.00

Illuminance (Fc)
Average = 0.83
Maximum = 1.4
Minimum = 0.1
Avg/Min Ratio = 8.30
Max/Min Ratio = 14.00


PARKING1

Illuminance (Fc)
Average = 0.90
Maximum = 1.4
Minimum = 0.3
Avg/Min Ratio = 3.00
Max/Min Ratio = 4.67

PARKING2

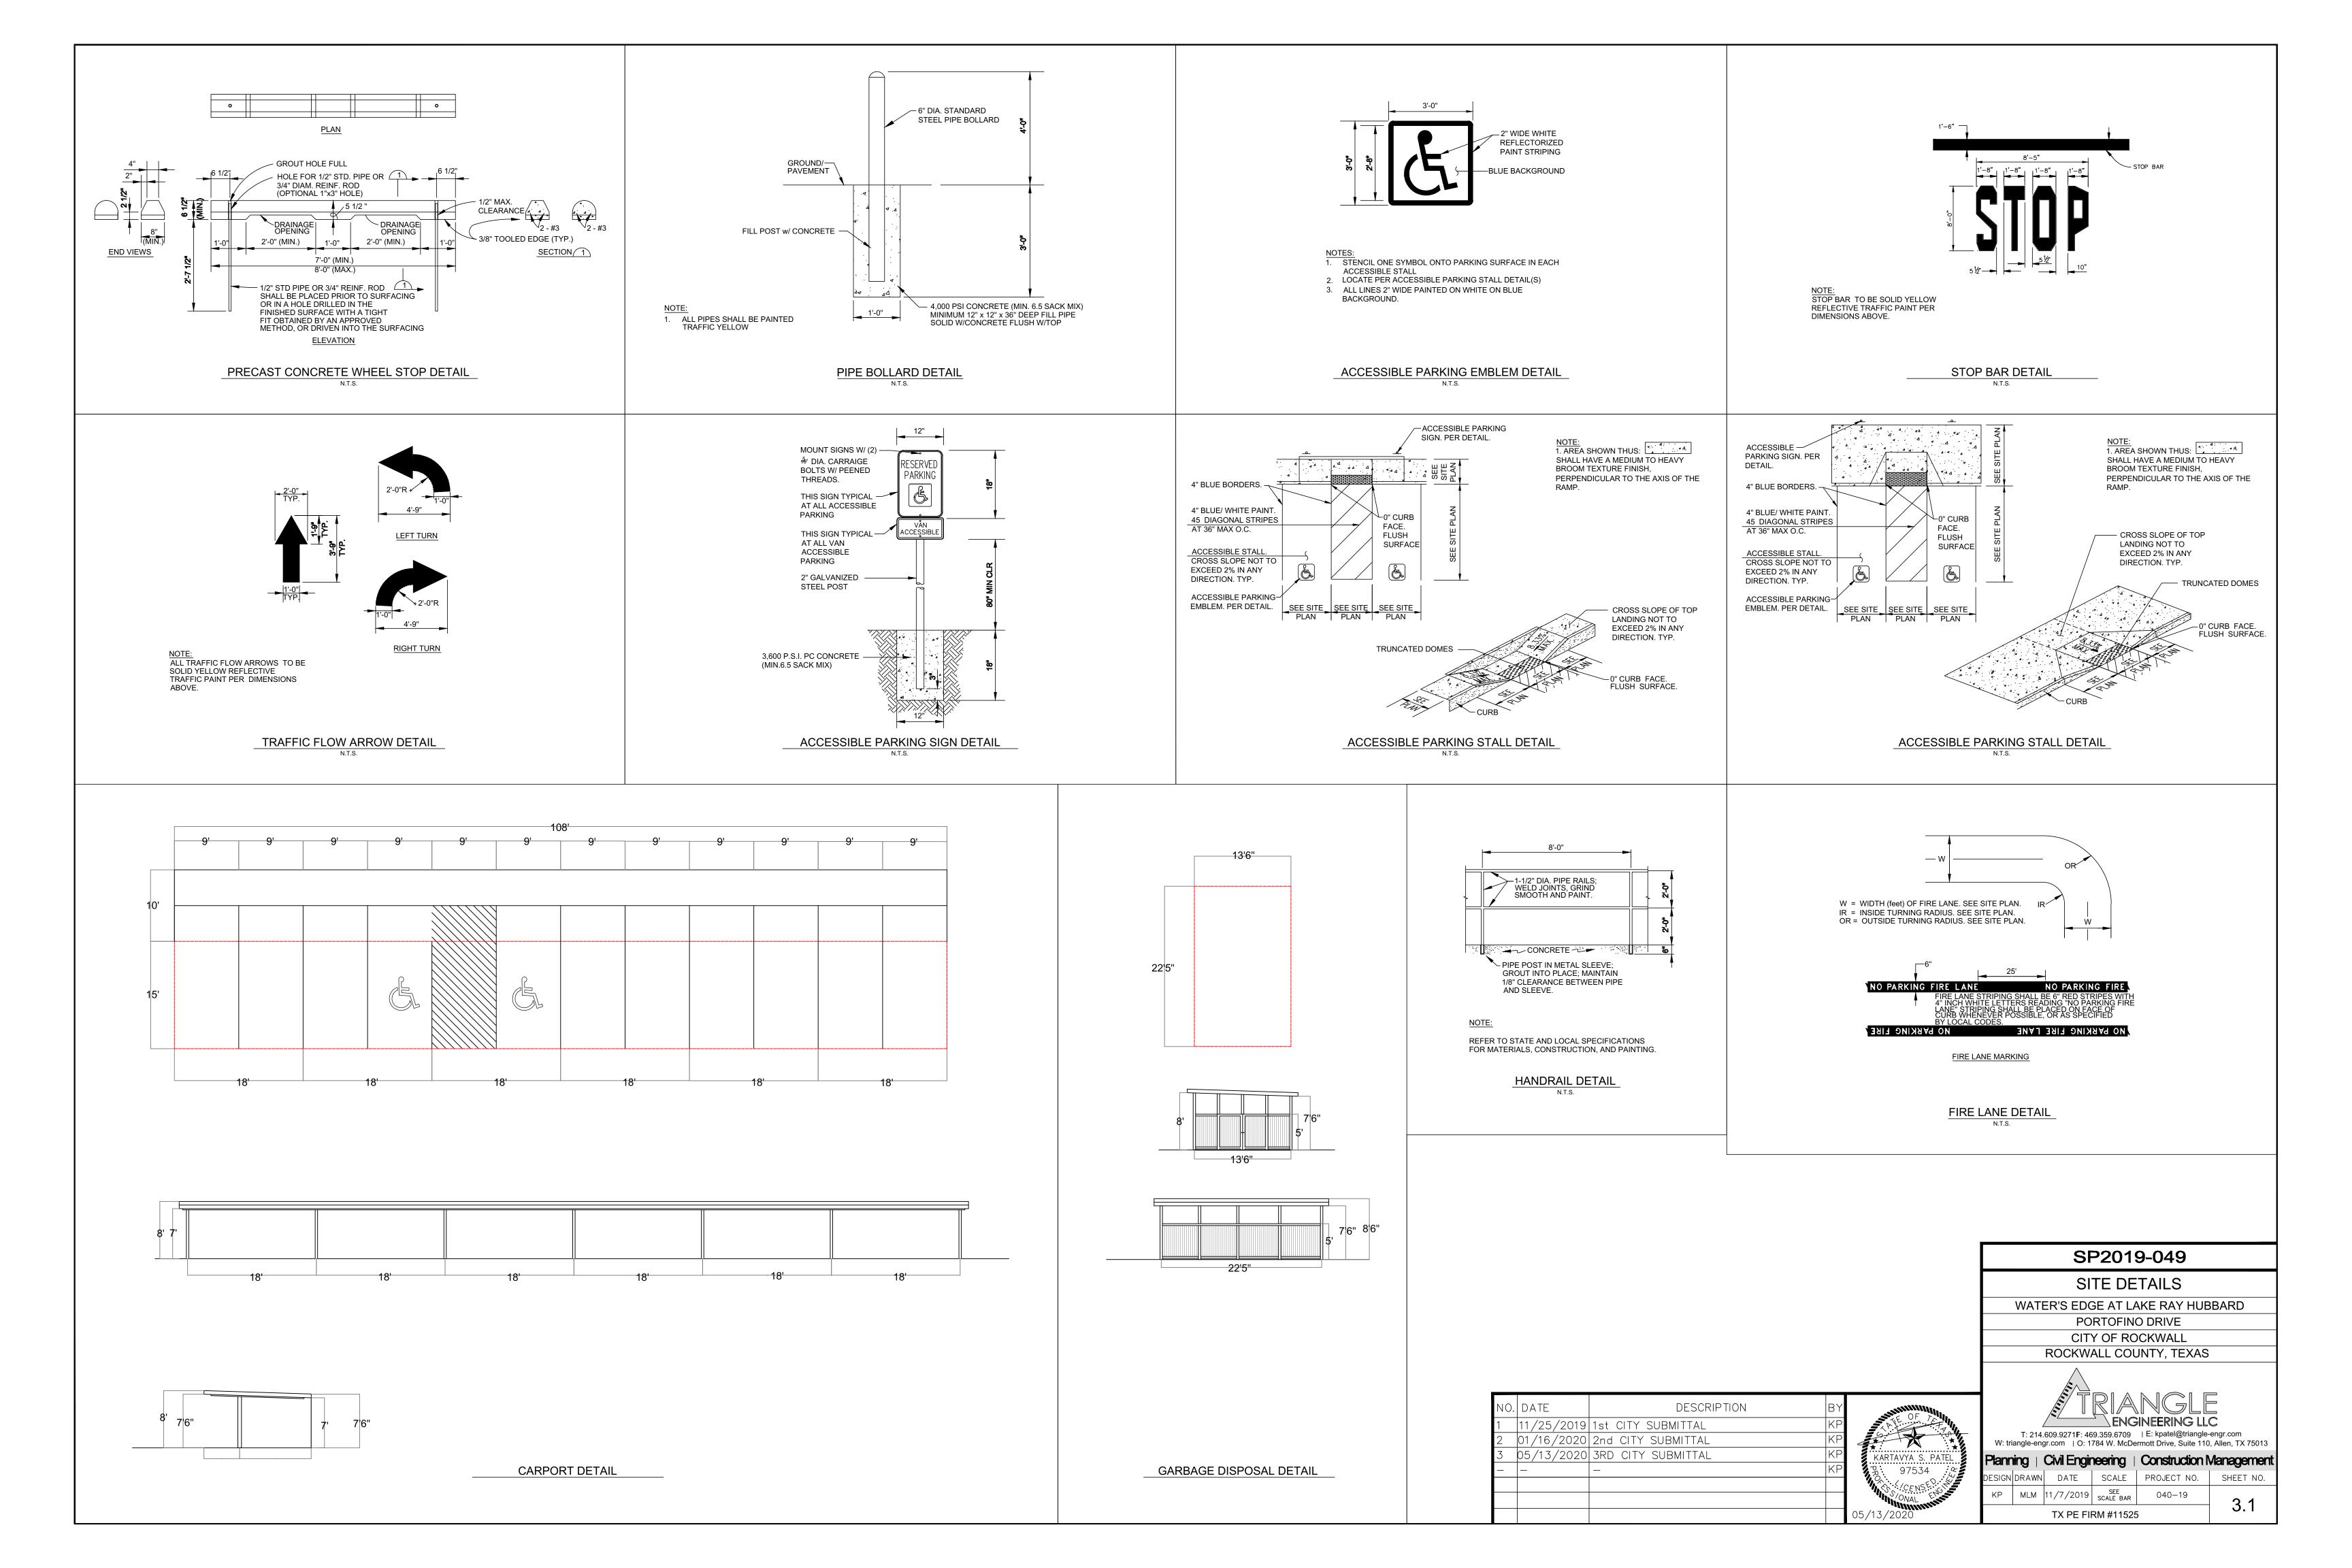

PROJECT COMMENTS



DATE: 8/25/2023

PROJECT NUMBER: SP2023-027

PROJECT NAME: Site Plan for Building 2, 2014-A, Portofino Drive

SITE ADDRESS/LOCATIONS:

CASE CAPTION: Discuss and consider a request by Daniyal M. Awan of Plutus21 Development Fund 5, LLC for the approval of an Amended Site Plan

for two (2) multi-family apartment buildings on a 6.5995-acre parcel of land identified as Lot 1, Block A, Villas De Portofino Addition,

City of Rockwall, Rockwall County, Texas, zoned Planned Development District 22 (PD-22) for Marina, Retail, Office, and

Apartment/Condominium land uses, addressed as 2000-2038 Portofino Circle, and take any action necessary.

DEPARTMENT	REVIEWER	DATE OF REVIEW	STATUS OF PROJECT	
PLANNING	Henry Lee	08/25/2023	Needs Review	

08/25/2023: Please address the following comments (M= Mandatory Comments; I = Informational Comments)

- I.1 This is a request by Daniyal M. Awan of Plutus21 Development Fund 5, LLC for the approval of an Amended Site Plan for two (2) multi-family apartment buildings on a 6.5995 -acre parcel of land identified as Lot 1, Block A, Villas De Portofino Addition, City of Rockwall, Rockwall County, Texas, zoned Planned Development District 22 (PD-22) for Marina, Retail, Office, and Apartment/Condominium land uses, addressed as 2000-2038 Portofino Circle.
- 1.2 For questions or comments concerning this case please contact Henry Lee in the Planning Department at (972) 772-6434 or email hlee@rockwall.com.
- M.3 For reference, include the case number (SP2023-027) in the lower right-hand corner of all pages of all revised plan submittals. (Subsection 01.02(D), Article 11, Unified Development Code [UDC])
- M.4 Please indicate the dog park as an amenity area on the site plan and landscape plan.
- M.5 Provide the standard signature block with signature space for the Planning and Zoning Chairman and the Planning Director on all pages of the plans. Also remove the red placeholder text from the signature block. (Subsection 03.04. A, of Article 11, UDC)

APPROVED:

I hereby certify that the above and foregoing site plan for a development	nent in the City of Rockwall, Texas, was approve	d by the Planning & Zoning Commission of the City of Rockwa
on the day of,		
WITNESS OUR HANDS, this day of		
,,,,		
Planning & Zoning Commission, Chairman	Director of Planning and Zoning	


M.6 Site Plan:


(1) Please indicate that the dumpster enclosure gates will be self-latching. (Subsection 01.05. B, of Article 05, UDC)

- (2) Please indicate the dog park fencing as wrought iron and indicate the height. (Subsection 08.02. F, of Article 08, UDC)
- M.7 Landscape Plan:
- (1) Please indicate the canopy trees as 4" caliper and not 3" within the landscape table. (Subsection 05.03. B, of Article 08, UDC)
- (2) Please provide a note that the irrigation will meet the requirements of the Unified Development Code (Subsection 05.04, of Article 08, UDC)
- M.8 Photometric Plan:
- (1) Provide the same site data information required in Section 2.1 of the site plan checklist. (See Section 2.1 of the site plan checklist)
- (2) Please provide all lighting cutsheets and spec sheets. All lighting must be oriented downward and fully shielded. (Subsection 03.03, of Article 07, UDC)
- I.9 Please note that failure to address all comments provided by staff by 3:00 PM on September 6, 2023 will result in the automatic denial of the case on the grounds of an incomplete submittal. No refund will be given for cases that are denied due to an incomplete submittal, and a new application and fee will be required to resubmit the case.
- I.10 Staff has identified the aforementioned items necessary to continue the submittal process. Please make these revisions and corrections, and provide any additional information that is requested. Revisions for this case will be due on September 6, 2023; however, it is encouraged for applicants to submit revisions as soon as possible to give staff ample time to review the case prior to the September 12, 2023 Planning & Zoning Meeting.
- I.11 Please note the scheduled meetings for this case:
- 1) Planning & Zoning Work Session meeting will be held on August 29, 2023.
- 2) Planning & Zoning meeting/public hearing meeting will be held on September 12, 2023.
- I.12 All meetings will be held in person and in the City's Council Chambers. All meetings listed above are scheduled to begin at 6:00 p.m. (P&Z). The City prefers that a representative(s) be present for these meetings. During the upcoming work session meeting with the Planning and Zoning Commission, representative(s) are expected to present their case and answer any questions the Planning Commission may have regarding this request.

DEPARTMENT	REVIEWER	DATE OF REVIEW	STATUS OF PROJECT	
ENGINEERING	Madelyn Price	08/25/2023	Approved w/ Comments	
08/25/2023: 1. Why is this clou	uded? Is there a revisions?			
2. Are there covers over all of t	hese parking spaces?			
DEPARTMENT	REVIEWER	DATE OF REVIEW	STATUS OF PROJECT	
BUILDING	Craig Foshee	08/23/2023	Approved	
No Comments				
DEPARTMENT	REVIEWER	DATE OF REVIEW	STATUS OF PROJECT	
FIRE	Ariana Kistner	08/22/2023	Approved w/ Comments	
08/22/2023: The carport cover	shall not extend into the fire lane easement in a	any manner.		
DEPARTMENT	REVIEWER	DATE OF REVIEW	STATUS OF PROJECT	
GIS	Lance Singleton	08/21/2023	Approved w/ Comments	
08/21/2023: Shell address is 2	014-B PORTOFINO DR, ROCKWALL, TX 7503	32		
Unit numbers are 2028,2030,20	032,2034,2036,2038 PORTOFINO DR, ROCKV	/ALL, TX 75032		
DEPARTMENT	REVIEWER	DATE OF REVIEW	STATUS OF PROJECT	
POLICE	Chris Cleveland	08/21/2023	Approved	
No Comments				
DEPARTMENT	REVIEWER	DATE OF REVIEW	STATUS OF PROJECT	
PARKS	Travis Sales	08/21/2023	Approved w/ Comments	

08/21/2023: 1. Live Oak species trees must be 4: caliper minimum
2. Dog Park must adhere to Municipal Code / Chapter 6

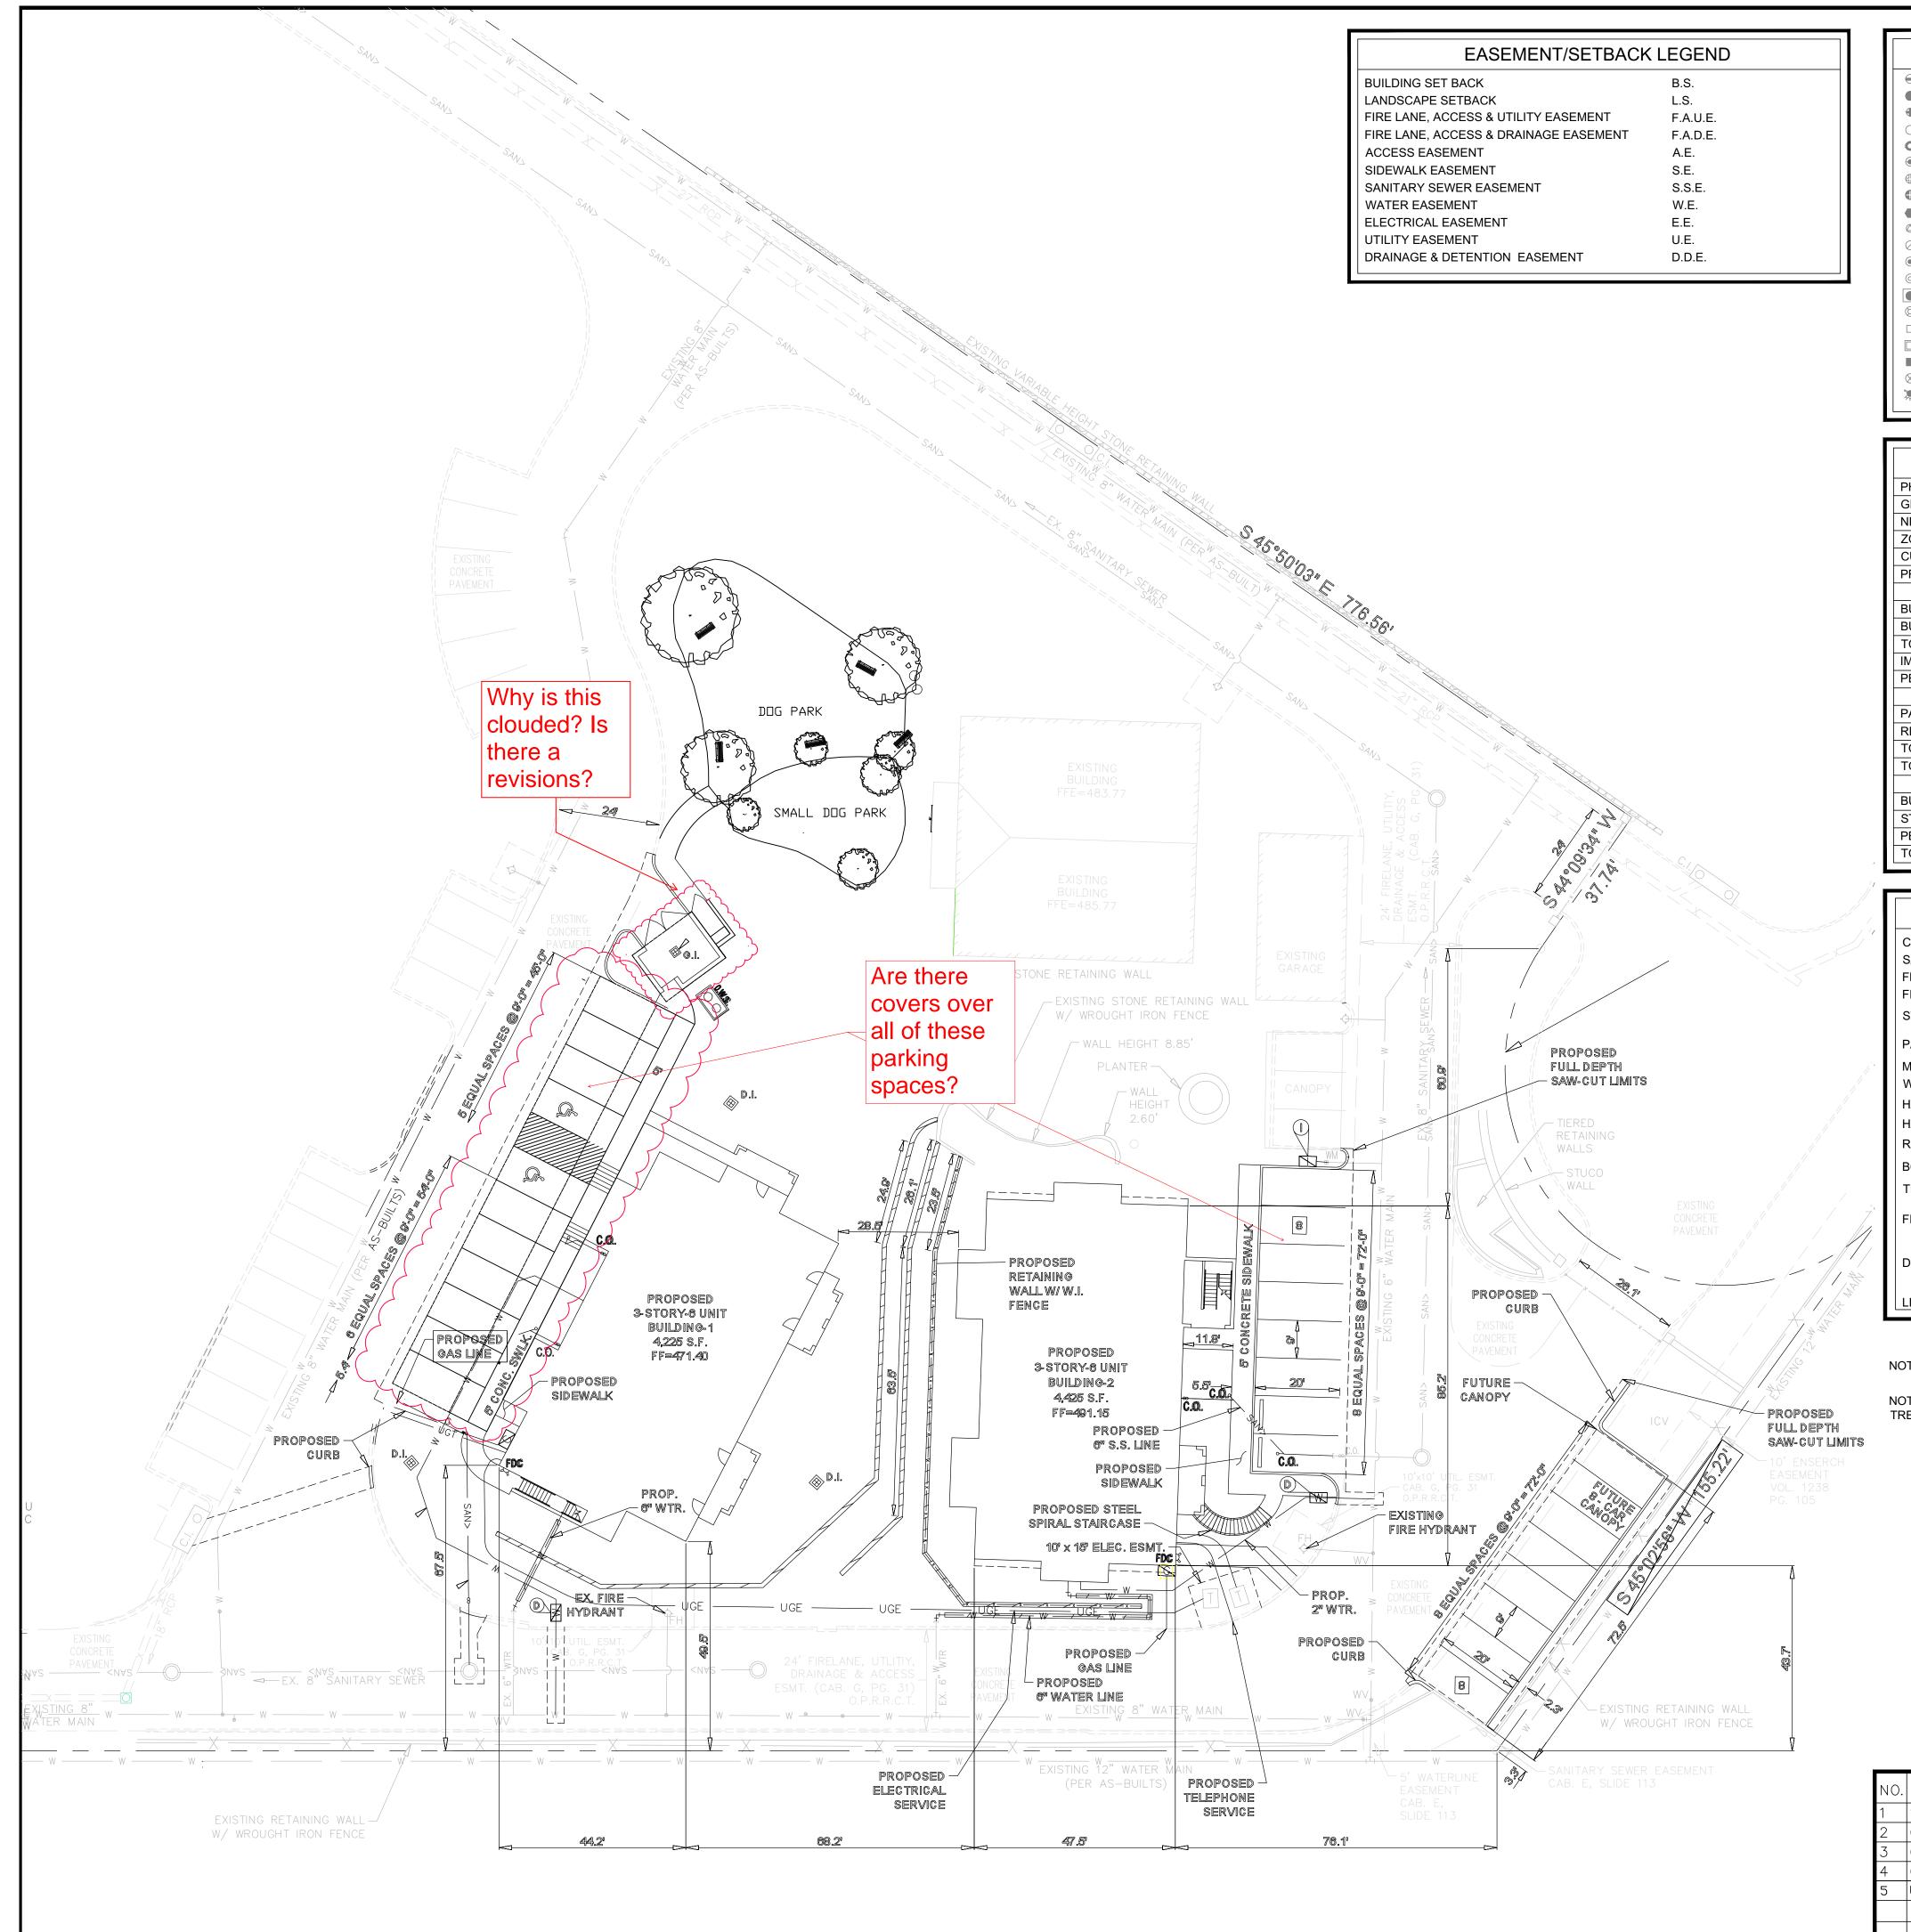

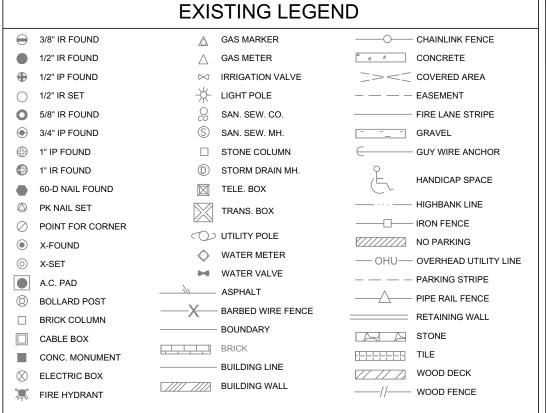

SITE DATA	A SUMMARY TABLE
PHYSICAL ADDRESS	PORTOFINO DRIVE
GROSS SITE AREA	287,476 S.F. / 6.60 ACRES
NET AREA	T.B.D.
ZONING	PD-22
CURRENT USE	CONDOMINIMUMS
PROPOSED USE	CONDOMINIMUMS
LOT	COVERAGE DATA
BUILDING COVERAGE	25,950 S.F.
BUILDING FOOTPRINT	8,650 S.F.
TOTAL BUILDING AREA	25,950 S.F.
IMPERVIOUS COVERAGE	6,946 S.F.
PERVIOUS COVERAGE	5,127 S.F.
PAR	RKING SUMMARY
PARKING SPACE REQUIREMENTS	
RESIDENTIAL PARKING - 2 SPACE	S PER UNIT
TOTAL PARKING SPACES REQUIR	RED = 24
TOTAL PARKING SPACES PROVID	PED = 27
В	UILDING DATA
BUILDINGS	2 BUILDINGS & 1 GARAGE
STORIES	3
PEAK HEIGHT	35'-0"
TOTAL SQUARE FOOTAGE	25,950 S.F.

	7			
SITE LEGEND				
CONCRETE CURB				
SAW-CUT LINE				
FENCE	X			
FIRE LANE				
STRIPING				
PARKING SPACES	9			
MONUMENT/PYLON SIGN				
WHEEL STOPS				
HANDICAP LOGO	<u> </u>			
HANDICAP SIGN	<u> </u>			
RAMP	0333			
BOLLARD	•			
TRAFFIC ARROW	→			
FIRE HYDRANT	-			
DUMPSTER				
LIGHT POLE				


NOTE: PROPOSED BUILDING COLORS AND MATERIALS TO MATCH EXISTING BUILDINGS.


NOTE: TREES TO BE 5' AWAY FROM PUBLIC UTILITY LINES LESS THAN 10". TREES TO BE 10' AWAY FROM PUBLIC UTILITY LINES THAT ARE 10" OR GREATER.


APPROVED:
I HEREBY CERTIFY THAT THE ABOVE AND FOREGOING SITE PLAN
FOR A DEVELOPMENT IN THE CITY OF ROCKWALL, TEXAS, WAS
APPROVED BY THE PLANNING & ZONING COMMISSION OF THE
CITY OF ROCKWALL ON THE ______ OF ________, 2020.

PLANNING & ZONING COMMISSION, CHAIRMAN

DIRECTOR OF PLANNING AND ZONING

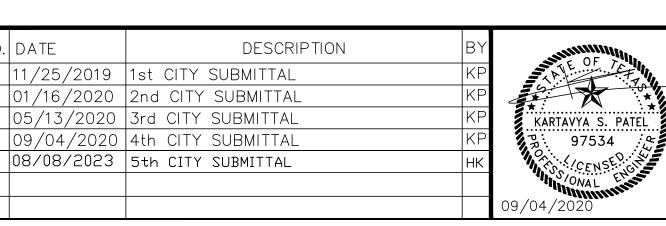



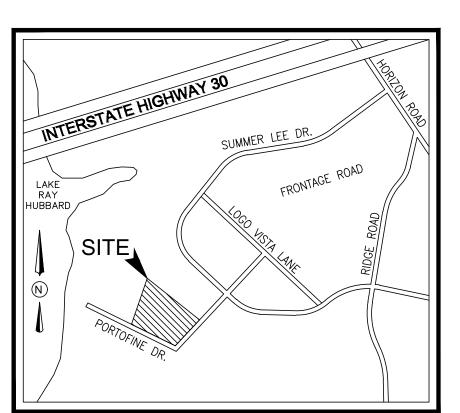

VICINITY MAP

N.T.S.

GENERAL NOTES

- 1. ALL CONSTRUCTION SHALL BE IN STRICT ACCORDANCE WITH THE STANDARDS OF THE CITY OF ROCKWALL.
- 2. A PERMIT IS REQUIRED TO CUT A CITY STREET OR WORK WITHIN THE RIGHT-OF-WAY. THE PERMIT IS ISSUED BY THE PUBLIC WORKS DEPARTMENT.
- 3. THE LOCATION OF UNDERGROUND UTILITIES INDICATED ON THE PLANS IS TAKEN FROM PUBLIC RECORDS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO MAKE ARRANGEMENTS WITH THE OWNERS OF SUCH UNDERGROUND UTILITIES PRIOR TO WORKING IN THE AREA TO CONFIRM THEIR EXACT LOCATION AND TO DETERMINE WHETHER ANY ADDITIONAL UTILITIES OTHER THAN THOSE SHOWN ON THE PLANS MAY BE PRESENT. THE CONTRACTOR SHALL PRESERVE AND PROTECT ALL UNDERGROUND UTILITIES. IF EXISTING UNDERGROUND UTILITIES ARE DAMAGED, THE CONTRACTOR WILL BE RESPONSIBLE FOR THE COST OF REPAIRING THE UTILITY.
- 4. WHERE EXISTING UTILITIES OR SERVICE LINES ARE CUT, BROKEN OR DAMAGED, THE CONTRACTOR SHALL REPLACE OR REPAIR THE UTILITIES OR SERVICE LINES WITH THE SAME TYPE OF ORIGINAL MATERIAL AND CONSTRUCTION, OR BETTER, UNLESS OTHERWISE SHOWN OR NOTED ON THE PLANS, AT HIS OWN COST AND EXPENSE. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER AT ONCE OF ANY CONFLICTS IN GRADES AND ALIGNMENT.
- 5. ALL EXCAVATIONS, TRENCHING AND SHORING OPERATIONS SHALL COMPLY WITH THE REQUIREMENTS OF THE U. S. DEPARTMENT OF LABOR, OSHA, "CONST. SAFETY AND HEALTH REGULATIONS.", VOL. 29, SUBPART P. PG. 128 137, AND ANY AMENDMENTS THERETO.
- 6. ADEQUATE MEASURES SHALL BE TAKEN TO PREVENT EROSION. IN THE EVENT THAT SIGNIFICANT EROSION OCCURS AS A RESULT OF CONSTRUCTION THE CONTRACTOR SHALL RESTORE THE ERODED AREA TO ORIGINAL CONDITION OR BETTER.
- 7. THE CONTRACTOR SHALL RESTORE ALL AREAS DISTURBED BY CONSTRUCTION TO ORIGINAL CONDITION OR BETTER. RESTORED AREAS INCLUDE, BUT ARE NOT LIMITED TO TRENCH BACKFILL, SIDE SLOPES, FENCES, CULVERT PIPES, DRAINAGE DITCHES, DRIVEWAYS, PRIVATE YARDS AND ROADWAYS.
- 8. ANY CHANGES NEEDED AFTER CONSTRUCTION PLANS HAVE BEEN RELEASED, SHALL BE APPROVED BY THE CITY ENGINEER. THESE CHANGES MUST BE RECEIVED IN WRITING FROM THE DESIGN ENGINEER. THE DIRECTOR OF PUBLIC WORKS SHALL APPROVE ANY DEVIATIONS FROM STATE REGULATIONS.
- 9. THE CONTRACTOR SHALL PROVIDE "RED LINED" MARKED PRINTS TO THE ENGINEER PRIOR TO FINAL INSPECTION INDICATING ALL CONSTRUCTION WHICH DEVIATED FROM THE PLANS OR WAS CONSTRUCTED IN ADDITION TO THAT INDICATED ON THE PLANS.

WATER METER & SANITARY SEWER SCHEDULE				
ID	TYPE	SIZE	NO.	SAN. SEW.
D	DOM.	1 1/2"	2	6"
	IRR.	1"	1	N/A

SP2019-049
SITE PLAN
WATER'S EDGE AT LAKE RAY HUBBARD
PORTOFINO DRIVE
CITY OF ROCKWALL
ROCKWALL COUNTY, TEXAS
TRIANGLE

KP MLM 11/7/2019 SEE SCALE BAR

TX PE FIRM #11525



040-19



DEVELOPMENT APPLICATION

City of Rockwall
Planning and Zoning Department
385 S. Goliad Street
Rockwall, Texas 75087

Ì	PLANNING & ZONING CASE NO.
	<u>NOTE:</u> THE APPLICATION IS NOT CONSIDERED ACCEPTED BY THE CITY UNTIL THE PLANNING DIRECTOR AND CITY ENGINEER HAVE SIGNED BELOW.
	DIRECTOR OF PLANNING:
	CITY ENGINEER:

	Rockwall, Texas 15001	CITY E	NGINEER:			
PLEASE CHECK THE AF	PPROPRIATE BOX BELOW TO INDICATE THE TYPE OF	DEVELOPMENT REQU	UEST [SELECT ONLY ONE BOX]:	-		
☐ MASTER PLAT (\$ ☐ PRELIMINARY PL ☐ FINAL PLAT (\$300.00 ☐ REPLAT (\$300.00 ☐ AMENDING OR M ☐ PLAT REINSTATE SITE PLAN APPLICA ☐ SITE PLAN (\$250.	\$100.00 + \$15.00 ACRE) 1 LAT (\$200.00 + \$15.00 ACRE) 1 0.00 + \$20.00 ACRE) 1 0 + \$20.00 ACRE) 1 MINOR PLAT (\$150.00) EMENT REQUEST (\$100.00) ATION FEES: .00 + \$20.00 ACRE) 1	☐ ZONING CHAN☐ SPECIFIC USE☐ PD DEVELOPM OTHER APPLICA☐ TREE REMOV.☐ VARIANCE RE NOTES: ': IN DETERMINING THE PER ACRE AMOUNT. FO	NGE (\$200.00 + \$15.00 ACRE) 1 E PERMIT (\$200.00 + \$15.00 ACRE) 1 8 2 MENT PLANS (\$200.00 + \$15.00 ACRE) 1 TION FEES: AL (\$75.00) QUEST/SPECIAL EXCEPTIONS (\$100.00) 2 E FEE, PLEASE USE THE EXACT ACREAGE WHEN MULTIPLYING BY THE OR REQUESTS ON LESS THAN ONE ACRE, ROUND UP TO ONE (1) ACRE. LL BE ADDED TO THE APPLICATION FEE FOR ANY REQUEST THAT			
PROPERTY INFOR	RMATION [PLEASE PRINT]					
ADDRESS	BUILDING 2, 2014-A, PORT	TOFINO DR	, ROCKWALL TX 75032			
SUBDIVISION			· ·			
GENERAL LOCATION SUMMER LEE AND PORTOFING DRIVE						
ONING, SITE PLA	AN AND PLATTING INFORMATION [PLEASE	PRINT]				
CURRENT ZONING	PD -22	CURRENT USE	CONDOMINIUMS			
PROPOSED ZONING		PROPOSED USE	COMBOMINIUMS.			
ACREAGE	6.5995 LOTS [CURRENT]	85	LOTS [PROPOSED] 85			
REGARD TO ITS AF	PPROVAL PROCESS, AND FAILURE TO ADDRESS ANY OF S	NAT DUE TO THE PASSA STAFF'S COMMENTS BY 1	GE OF <u>HB3167</u> THE CITY NO LONGER HAS FLEXIBILITY WITH THE DATE PROVIDED ON THE DEVELOPMENT CALENDAR WILL	1		
OWNER/APPLICA	NT/AGENT INFORMATION [PLEASE PRINT/CHE	ECK THE PRIMARY CONTA	ACT/ORIGINAL SIGNATURES ARE REQUIRED]			
☑ OWNER	PLUTUS 21 DEUELOPMENTS	✓ □ APPLICANT				
CONTACT PERSON	DANIYAL AWAN	CONTACT PERSON				
		ADDRESS				
		CITY, STATE & ZIP				
		PHONE				
		E-MAIL				
EFORE ME, THE UNDERS	SIGNED AUTHORITY, ON THIS DAY PERSONALLY APPEARED	Daniyal A	wan [OWNER] THE UNDERSIGNED, WHO)		
AUGU T NFORMATION CONTAINED SUBMITTED IN CONJUNCTION	TO COVER THE COST OF THIS APPLICATION, HAS 20 23 BY SIGNING THIS APPLICATION, I AGREE WITHIN THIS APPLICATION TO THE PUBLIC. THE CITY IS 20 WITH THIS APPLICATION, IF SUCH REPRODUCTION IS ASSOCIATED.	S BEEN PAID TO THE CITY (E THAT THE CITY OF ROC ALSO AUTHORIZED AND	DE ROCKWALL ON THIS THE	=		
IVEN UNDER MY HAND A	ND SEAL OF OFFICE ON THIS THE 18+ DAY OF AUG	ust 2023.	Comm. Expires 03-02-2026			
	OWNER'S SIGNATURE		, white			
IOTARY PUBLIC IN AND F	OR THE STATE OF TEXAS Bla	ile cheistine for	mings MY COMMISSION EXPIRES 3.2-2626			
	PLATTING APPLICA MASTER PLAT (\$ PRELIMINARY PL FINAL PLAT (\$300.00 AMENDING OR M PLAT REINSTATE SITE PLAN APPLICA SITE PLAN (\$250.00 AMENDED SITE F PROPERTY INFOIR ADDRESS SUBDIVISION GENERAL LOCATION CONING, SITE PLAN ACREAGE SITE PLANS AND REGARD TO ITS AIR RESULT IN THE DE DWNER/APPLICA OWNER CONTACT PERSON ADDRESS CITY, STATE & ZIP PHONE E-MAIL OTARY VERIFIC EFORE ME, THE UNDERS INTERIOR MATTER OTARY VERIFIC EFORE ME, THE UNDERS INTERIOR MATTER OTARY VERIFIC EFORE ME, THE UNDERS INTERIOR METERS OTARY VERIFIC EFORE ME, THE UNDERS INTERIOR CONJUNCTION WEN UNDER MY HAND AND INTERIOR MY HAND AND	LEASE CHECK THE APPROPRIATE BOX BELOW TO INDICATE THE TYPE OF PLATTING APPLICATION FEES: MASTER PLAT (\$100.00 + \$15.00 ACRE) PRELIMINARY PLAT (\$200.00 + \$15.00 ACRE) FINAL PLAT (\$300.00 + \$20.00 ACRE) AMENDING OR MINOR PLAT (\$150.00) PLAT REINSTATEMENT REQUEST (\$100.00) SITE PLAN APPLICATION FEES: SITE PLAN (\$250.00 + \$20.00 ACRE) AMENDING OR MINOR PLAT (\$150.00) PLAT REINSTATEMENT REQUEST (\$100.00) SITE PLAN APPLICATION FEES: SITE PLAN (\$250.00 + \$20.00 ACRE) AMENDED SITE PLANIELEVATIONS/LANDSCAPING PLAN (\$100.00) PROPERTY INFORMATION [PLEASE PRINT] ADDRESS BUILDING 2, 2014-A, PORT SUBDIVISION WATERS ED GE RT LAKE SUBDIVISION WATERS ED GE RT LAKE CURRENT ZONING PD - 22 PROPOSED ZONING ACREAGE 6.5995 LOTS [CURRENT] SITE PLANS AND PLATS: BY CHECKING THIS BOX YOU ACKNOWLEDGE THE REGARD TO ITS APPROVAL PROCESS, AND FAILURE TO ADDRESS ANY OF SESSIVITY IN THE DENIAL OF YOUR CASE. DWNER/APPLICANT/AGENT INFORMATION [PLEASE PRINTICHE OWNER PLUTUS 21 DEUELORMENT] DOWNER PLUTUS 21 DEUELORMENT OF SESSIVITY AND AND ADDRESS IN YOUR ACKNOWLEDGE THE AND AND ADDRESS IN YOUR ACKNOWLEDGE THE ACCOUNTACT PERSON DANLYAL AWAN ADDRESS IN YOUR ACKNOWLEDGE THE ACCOUNTACT PERSON DANLYAL AWAN ADDRESS IN YOUR ACKNOWLEDGE THE ACCOUNTACT PERSON DANLYAL AWAN ADDRESS IN YOUR ACKNOWLEDGE THE ACCOUNTACT PERSON DANLYAL AWAN ADDRESS IN YOUR ACKNOWLEDGE THE ACCOUNTACT PERSON DANLYAL AWAN ADDRESS IN YOUR ACKNOWLEDGE THE ACCOUNTACT PERSON DANLYAL AWAN ADDRESS IN YOUR ACKNOWLEDGE THIS APPLICATION, AND THE PURPOSE OF THIS APPLICATION, AND THE PURPOSE OF THIS APPLICATION, AND THE PURPOSE OF THIS APPLICATION, AND TO COUNTAIN THE PURPOSE OF THIS APPLICATION, AND TO COUNTAIN THE PURPOSE OF THIS APPLICATION, AND TO COUNTAIN THE PURPOSE OF THIS APPLICATION, AND THE PURPOSE OF THIS APPLICATION, AND TO COUNTAIN THE PURPOSE O	LEASE CHECK THE APPROPRIATE BOX BELOW TO INDICATE THE TYPE OF DEVELOPMENT REQ. PLATTING APPLICATION FEES: DASTER PLAT (\$100.00 + \$15.00 ACRE) PREPLAT (\$300.00 + \$20.00 ACRE) DRAFTER PLAT (\$300.00 + \$20.00 ACRE) DRAFTER PLAT (\$300.00 + \$20.00 ACRE) DRAFTER PLAN (\$200.00 ACRE) DRAFTER PLAN (\$20.00 ACRE) DRAFTER PLAN (\$20.	LEASE CHECK THE APPROPRIATE BOX BELOW TO INDICATE THE TYPE OF DEVELOPMENT REQUEST (SELECT ONLY ONE BOX): PLATTING APPLICATION FEES: MASTER PLAT (\$100.00 + \$15.00 ACRE) PRELIMANS PLAT (\$100.00 + \$15.00 ACRE) PRELIMA PLAT (\$100.00 + \$15.00 ACRE) PREMA TREDUCTION FEES: AMENDEO STRE PLAN (\$100.00) PAT REINSTANDENT REQUEST (\$100.00) PAT REINSTANDENT REQUEST (\$100.00) PAT REINSTANDENT REQUEST (\$100.00) PAT REINSTANDENT RECUEST (\$10		







City of Rockwall Planning & Zoning Department 385 S. Goliad Street Rockwall, Texas 75087 (P): (072) 774 7745

(P): (972) 771-7745 (W): www.rockwall.com

The City of Rockwall GIS maps are continually under development and therefore subject to change without notice. While we endeavor to provide timely and accurate information, we make no guarantees. The City of Rockwall makes no warranty, express or implied, including warranties of merchantability and fitness for a particular purpose. Use of the information is the sole responsibility of the user.



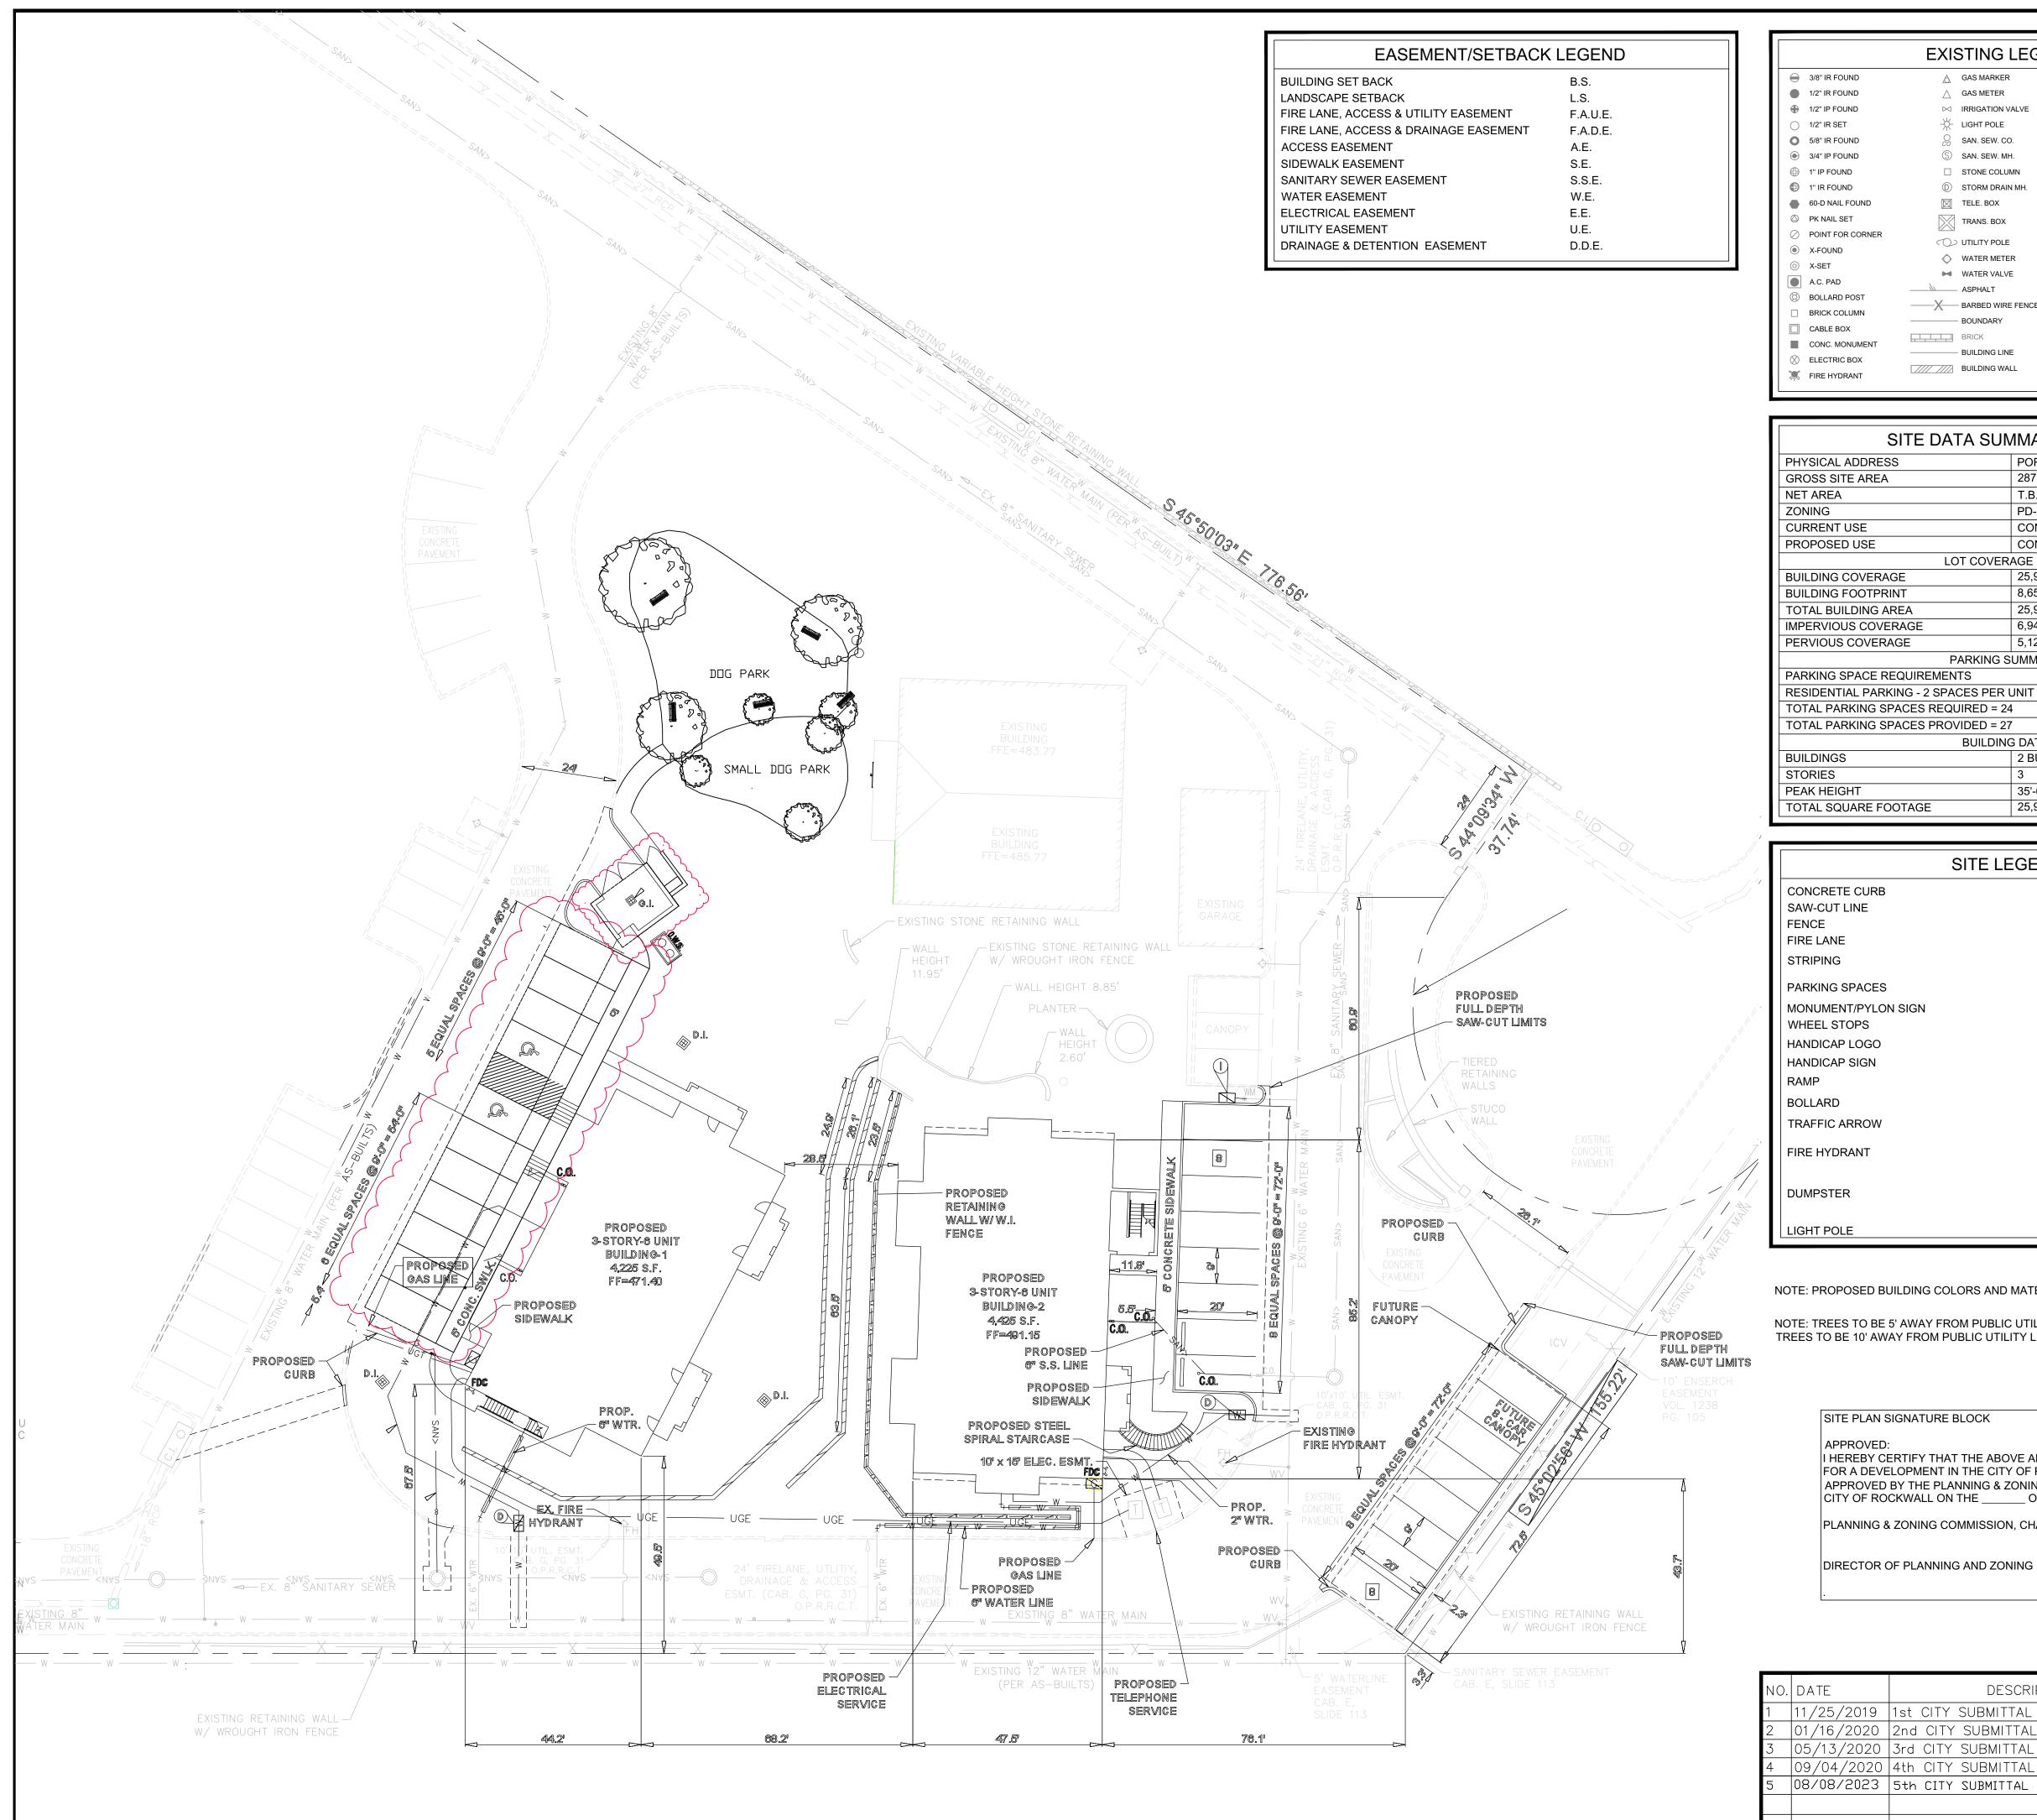

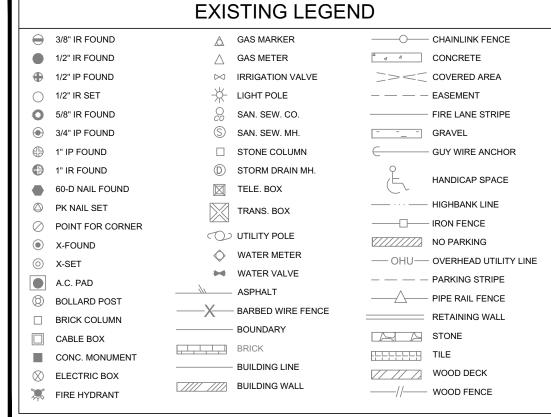

SITE DATA	A SUMMARY TABLE
PHYSICAL ADDRESS	PORTOFINO DRIVE
GROSS SITE AREA	287,476 S.F. / 6.60 ACRES
NET AREA	T.B.D.
ZONING	PD-22
CURRENT USE	CONDOMINIMUMS
PROPOSED USE	CONDOMINIMUMS
LOT	COVERAGE DATA
BUILDING COVERAGE	25,950 S.F.
BUILDING FOOTPRINT	8,650 S.F.
TOTAL BUILDING AREA	25,950 S.F.
IMPERVIOUS COVERAGE	6,946 S.F.
PERVIOUS COVERAGE	5,127 S.F.
PAF	RKING SUMMARY
PARKING SPACE REQUIREMENTS	3
RESIDENTIAL PARKING - 2 SPACE	S PER UNIT
TOTAL PARKING SPACES REQUIR	RED = 24
TOTAL PARKING SPACES PROVID	DED = 27
В	UILDING DATA
BUILDINGS	2 BUILDINGS & 1 GARAGE
STORIES	3
PEAK HEIGHT	35'-0"
TOTAL SQUARE FOOTAGE	25,950 S.F.

SI	TE LEGEND
CONCRETE CURB	
SAW-CUT LINE	
FENCE	X
FIRE LANE	
STRIPING	
PARKING SPACES	9
MONUMENT/PYLON SIGN	<u> </u>
WHEEL STOPS	
HANDICAP LOGO	<u> </u>
HANDICAP SIGN	
RAMP	00000 00000 00000
BOLLARD	•
TRAFFIC ARROW	→
FIRE HYDRANT	
DUMPSTER	
LIGHT POLE	

NOTE: PROPOSED BUILDING COLORS AND MATERIALS TO MATCH EXISTING BUILDINGS.

NOTE: TREES TO BE 5' AWAY FROM PUBLIC UTILITY LINES LESS THAN 10". TREES TO BE 10' AWAY FROM PUBLIC UTILITY LINES THAT ARE 10" OR GREATER.


SITE PLAN SIGNATURE BLOCK I HEREBY CERTIFY THAT THE ABOVE AND FOREGOING SITE PLAN FOR A DEVELOPMENT IN THE CITY OF ROCKWALL, TEXAS, WAS APPROVED BY THE PLANNING & ZONING COMMISSION OF THE CITY OF ROCKWALL ON THE _____ OF _____, 2020. PLANNING & ZONING COMMISSION, CHAIRMAN


DESCRIPTION


KARTAVYA S. PATEL

97534

DIRECTOR OF PLANNING AND ZONING





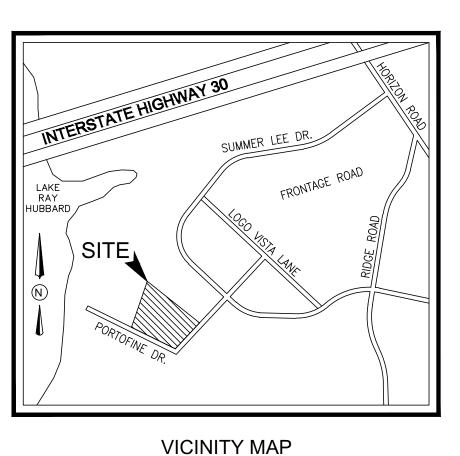

N.T.S.

GENERAL NOTES

- 1. ALL CONSTRUCTION SHALL BE IN STRICT ACCORDANCE WITH THE STANDARDS OF THE CITY OF ROCKWALL.
- 2. A PERMIT IS REQUIRED TO CUT A CITY STREET OR WORK WITHIN THE RIGHT-OF-WAY. THE PERMIT IS ISSUED BY THE PUBLIC WORKS DEPARTMENT.
- 3. THE LOCATION OF UNDERGROUND UTILITIES INDICATED ON THE PLANS IS TAKEN FROM PUBLIC RECORDS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO MAKE ARRANGEMENTS WITH THE OWNERS OF SUCH UNDERGROUND UTILITIES PRIOR TO WORKING IN THE AREA TO CONFIRM THEIR EXACT LOCATION AND TO DETERMINE WHETHER ANY ADDITIONAL UTILITIES OTHER THAN THOSE SHOWN ON THE PLANS MAY BE PRESENT. THE CONTRACTOR SHALL PRESERVE AND PROTECT ALL UNDERGROUND UTILITIES. IF EXISTING UNDERGROUND UTILITIES ARE DAMAGED, THE CONTRACTOR WILL BE RESPONSIBLE FOR THE COST OF REPAIRING THE UTILITY.
- 4. WHERE EXISTING UTILITIES OR SERVICE LINES ARE CUT, BROKEN OR DAMAGED, THE CONTRACTOR SHALL REPLACE OR REPAIR THE UTILITIES OR SERVICE LINES WITH THE SAME TYPE OF ORIGINAL MATERIAL AND CONSTRUCTION, OR BETTER, UNLESS OTHERWISE SHOWN OR NOTED ON THE PLANS, AT HIS OWN COST AND EXPENSE. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER AT ONCE OF ANY CONFLICTS IN GRADES AND ALIGNMENT.
- 5. ALL EXCAVATIONS, TRENCHING AND SHORING OPERATIONS SHALL COMPLY WITH THE REQUIREMENTS OF THE U. S. DEPARTMENT OF LABOR, OSHA, "CONST. SAFETY AND HEALTH REGULATIONS.", VOL. 29, SUBPART P. PG. 128 - 137, AND ANY AMENDMENTS THERETO.
- 6. ADEQUATE MEASURES SHALL BE TAKEN TO PREVENT EROSION. IN THE EVENT THAT SIGNIFICANT EROSION OCCURS AS A RESULT OF CONSTRUCTION THE CONTRACTOR SHALL RESTORE THE ERODED AREA TO ORIGINAL CONDITION OR BETTER.
- 7. THE CONTRACTOR SHALL RESTORE ALL AREAS DISTURBED BY CONSTRUCTION TO ORIGINAL CONDITION OR BETTER. RESTORED AREAS INCLUDE, BUT ARE NOT LIMITED TO TRENCH BACKFILL, SIDE SLOPES, FENCES, CULVERT PIPES, DRAINAGE DITCHES, DRIVEWAYS, PRIVATE YARDS AND ROADWAYS.
- 8. ANY CHANGES NEEDED AFTER CONSTRUCTION PLANS HAVE BEEN RELEASED, SHALL BE APPROVED BY THE CITY ENGINEER. THESE CHANGES MUST BE RECEIVED IN WRITING FROM THE DESIGN ENGINEER. THE DIRECTOR OF PUBLIC WORKS SHALL APPROVE ANY DEVIATIONS FROM STATE REGULATIONS.
- 9. THE CONTRACTOR SHALL PROVIDE "RED LINED" MARKED PRINTS TO THE ENGINEER PRIOR TO FINAL INSPECTION INDICATING ALL CONSTRUCTION WHICH DEVIATED FROM THE PLANS OR WAS CONSTRUCTED IN ADDITION TO THAT INDICATED ON THE PLANS.

WATER METER & SANITARY SEWER SCHEDULE				
ID	TYPE	SIZE	NO.	SAN. SEW.
D	DOM.	1 1/2"	2	6"
	IRR.	1"	1	N/A

1	
	SP2019-049
	SITE PLAN
	WATER'S EDGE AT LAKE RAY HUBBARD
	PORTOFINO DRIVE
	CITY OF ROCKWALL
	ROCKWALL COUNTY, TEXAS
	I FIANGLE



		,			,,
Plann	ning	Civil Engir	neering	Construction I	<i>Management</i>
DESIGN	DRAWN	DATE	SCALE	PROJECT NO.	SHEET NO.
KP	MLM	11/7/2019	SEE SCALE BAR	040-19	2
		TX PE FII	RM #11525	5	S

STUCCO TO MATCH EXISTING Sheet metal canopy Mediterranean style to match existing cover for electrical supply and meter base

WEST ELEVATION

100% MASONRY 9% STONE 91% STUCCO

STUCCO SILL

- STONE WATER TABLE

- COMPLETE THE SYSTEM.
- 2. IT IS THE SUBCONTRACTOR'S RESPONSIBILITY TO REVIEW THE DOCUMENTS AND INCLUDE ALL NECESSARY ITEMS TO PROVIDE A COMPLETE OPERATIONAL SYSTEM.
- 3. ANY DISCREPANCIES NOTED BY THE SUBCONTRACTOR SHALL BE BROUGHT TO THE ATTENTIONS OF THE ARCHITECT (IN WRITING) BEFORE BIDDING THIS PROJECT.
- 4. AFTER BIDS ARE TURNED IN, THE SUBCONTRACTOR SHALL COMPLETE THE SYSTEMS AT NO ADDITIONAL COST.
- 5. PLUMBING, MECHANICAL, AND ELECTRICAL SUBCONTRACTORS ARE RESPONSIBLE FOR COORDINATING ALL COMPONENTS TO INSURE COMPLETE AND WORKING SYSTEMS EACH SUBCONTRACTOR SHALL REVIEW ALL DRAWINGS FOR COMPLIANCE.
- DETERMINE WHICH TRADE SHALL PROVIDE

OWNER PLUTUS21 DEVELOPMENT 6116 N. CENTRAL EXPWY #700 DALLAS, TEXAS 75206

CASE #SP2020-000

© COPYRIGHT 2019 MERSHAWN ARCHITECTS, INC. NO PRINTING OR COPING IS ALLOWED WITHOUT PERMISSION FROM MERSHAWN.

6. THE ARCHITECT WILL BE RESPONSIBLE TO AND INSTALL ANY COMPONENTS MISSED FOR WORKING SYSTEMS AS NEEDED.

Project No.: Designed: GW Drawn: GW Checked: WM SHEET

3/16" = 1'-0"


04/21/2023

Scale:



SOUTH ELEVATION

100% MASONRY 10% STONE 90% STUCCO

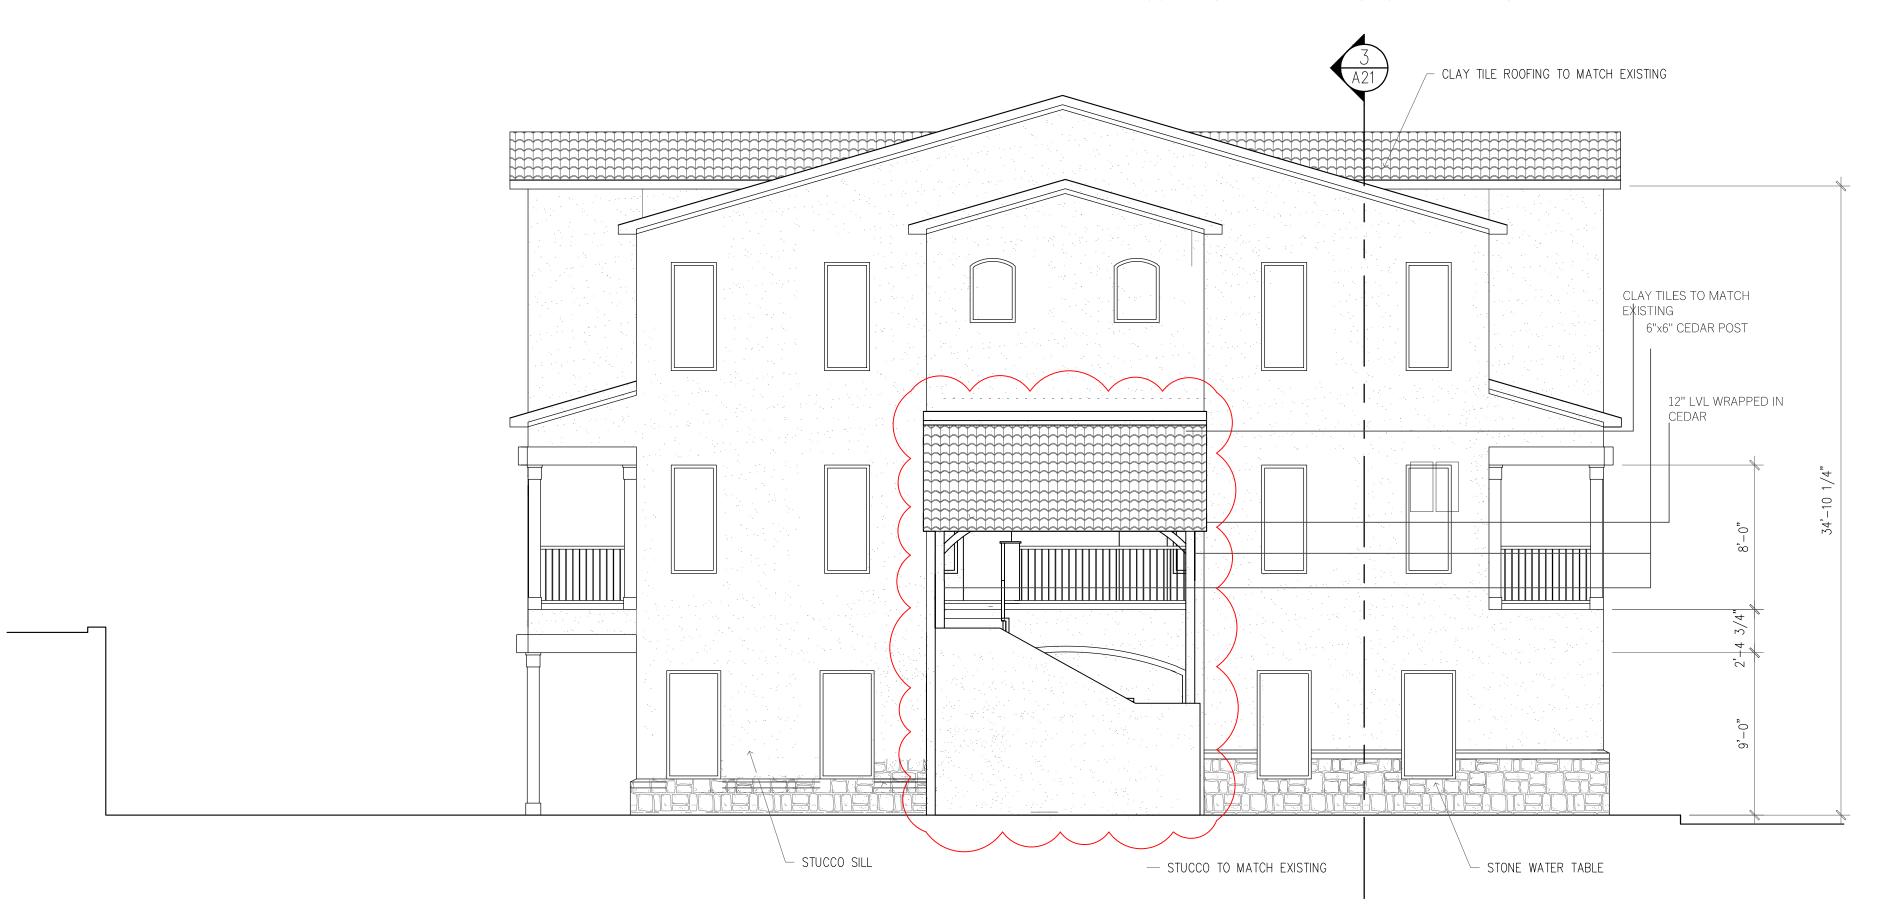

EAST ELEVATION 100% MASONRY 9% STONE 91% STUCCO NOTE: ALL NEW BUILDING ELEVATIONS SHALL MATCH COLORS TO THE EXISTING SURROUNDING BUILDINGS. THIS BUILDING HAS SIX INDIVIDUAL LIVING UNITS.

PRICING & CONSTRUCTION GENERAL NOTES:

THESE DRAWINGS ARE DIAGRAMMATIC IN NATURE AND ARE NOT INTENDED TO INDICATE EACH AND EVERY FITTING, OFFSET, OR OTHER APPURTENANCE NECESSARY TO

COMPLETE THE SYSTEM.


- 2. IT IS THE SUBCONTRACTOR'S RESPONSIBILITY TO REVIEW THE DOCUMENTS AND INCLUDE ALL NECESSARY ITEMS TO PROVIDE A COMPLETE OPERATIONAL SYSTEM.
- 3. ANY DISCREPANCIES NOTED BY THE SUBCONTRACTOR SHALL BE BROUGHT TO THE ATTENTIONS OF THE ARCHITECT (IN WRITING) BEFORE BIDDING THIS PROJECT.
- 4. AFTER BIDS ARE TURNED IN, THE SUBCONTRACTOR SHALL COMPLETE THE SYSTEMS AT NO ADDITIONAL COST.
- 5. PLUMBING, MECHANICAL, AND ELECTRICAL SUBCONTRACTORS ARE RESPONSIBLE FOR COORDINATING ALL COMPONENTS TO INSURE COMPLETE AND WORKING SYSTEMS EACH SUBCONTRACTOR SHALL REVIEW ALL DRAWINGS FOR COMPLIANCE.
- 6. THE ARCHITECT WILL BE RESPONSIBLE TO DETERMINE WHICH TRADE SHALL PROVIDE AND INSTALL ANY COMPONENTS MISSED FOR WORKING SYSTEMS AS NEEDED.

© COPYRIGHT 2019 MERSHAWN ARCHITECTS, INC. NO PRINTING OR COPING IS ALLOWED

OWNER PLUTUS21 DEVELOPMENT 6116 N. CENTRAL EXPWY #700 DALLAS, TEXAS 75206

CASE #SP2020-000

WITHOUT PERMISSION FROM MERSHAWN.



, **T** m ,

3/16" = 1'-0" Scale: 04/21/2023 Project No.: 190602 Designed: GW

Drawn: GW Checked: WM SHEET















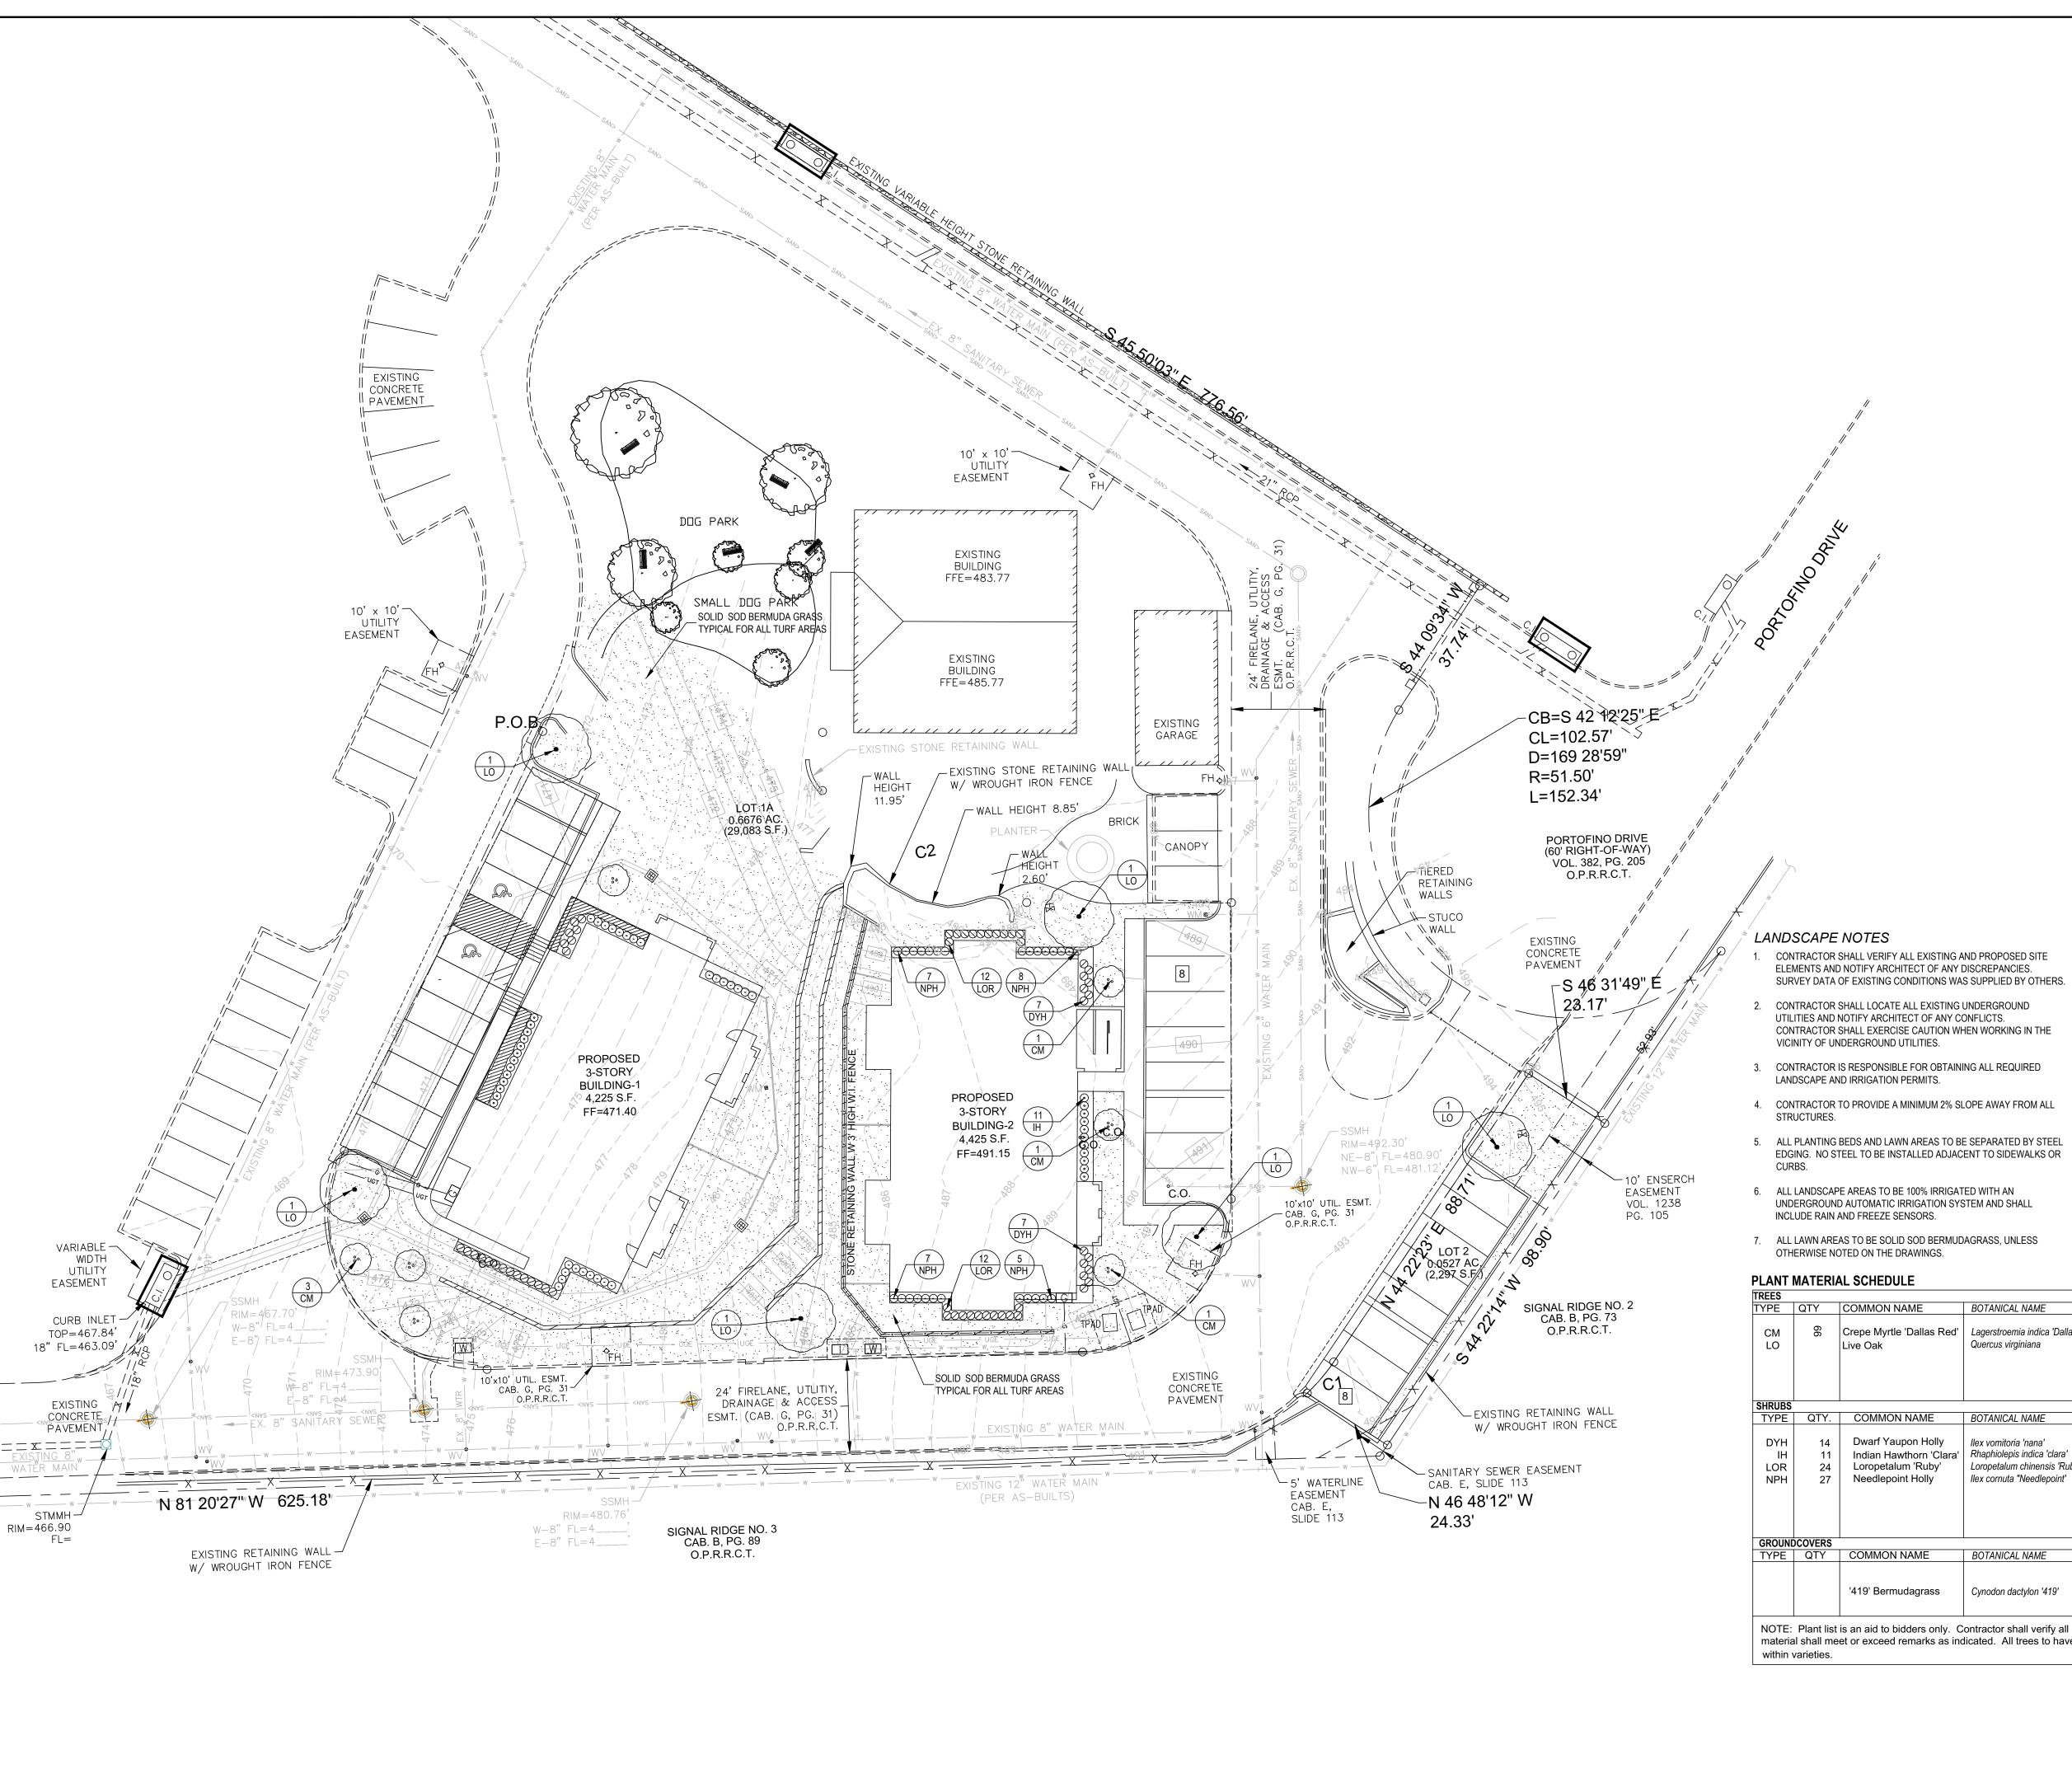

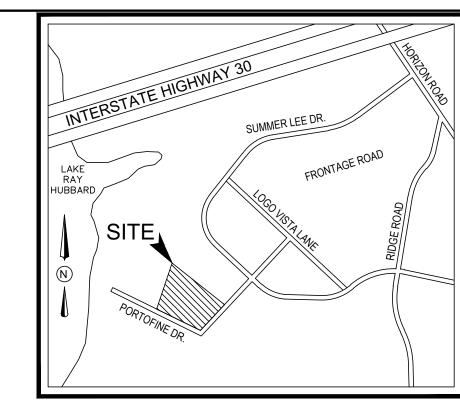

VICINITY MAP

GENERAL LAWN NOTES

- 1. FINE GRADE AREAS TO ACHIEVE FINAL CONTOURS INDICATED ON CIVIL
- ADJUST CONTOURS TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.
- 3. ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFT IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE. CONTRACTOR TO COORDINATE OPERATIONS WITH ON-SITE CONSTRUCTION MANAGER.
- IMPORTED TOPSOIL SHALL BE NATURAL, FRIABLE SOIL FROM THE REGION, KNOWN AS BOTTOM AND SOIL, FREE FROM LUMPS, CLAY, TOXIC SUBSTANCES, ROOTS, DEBRIS, VEGETATION, STONES, CONTAINING NO SALT AND BLACK TO BROWN IN COLOR.
- ALL LAWN AREAS TO BE FINE GRADED, IRRIGATION TRENCHES COMPLETELY SETTLED, AND FINISH GRADE APPROVED BY THE OWNER'S CONSTRUCTION MANAGER OR ARCHITECT PRIOR TO INSTALLATION.
- ALL ROCKS 3/4" DIAMETER AND LARGER, DIRT CLODS, STICKS, CONCRETE SPOILS, ETC. SHALL BE REMOVED PRIOR TO PLACING TOPSOIL AND ANY LAWN INSTALLATION
- 7. CONTRACTOR SHALL PROVIDE (1") ONE INCH OF IMPORTED TOPSOIL ON ALL AREAS TO RECEIVE LAWN.

SOLID SOD NOTES

- FINE GRADE AREAS TO ACHIEVE FINAL CONTOURS INDICATED. LEAVE AREAS TO RECEIVE TOPSOIL 3" BELOW FINAL DESIRED GRADE IN PLANTING AREAS AND 1" BELOW FINAL GRADE IN TURF
- ADJUST CONTOURS TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.
- 3. ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFT IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE. CONTRACTOR TO COORDINATE OPERATIONS WITH ON-SITE CONSTRUCTION
- CONTRACTOR TO COORDINATE WITH ON-SITE CONSTRUCTION MANAGER FOR AVAILABILITY OF EXISTING TOPSOIL.
- PLANT SOD BY HAND TO COVER INDICATED AREA COMPLETELY. INSURE EDGES OF SOD ARE TOUCHING. TOP DRESS JOINTS BY HAND WITH TOPSOIL TO FILL VOIDS.
- ROLL GRASS AREAS TO ACHIEVE A SMOOTH, EVEN SURFACE, FREE FROM UNNATURAL UNDULATIONS.
- WATER SOD THOROUGHLY AS SOD OPERATION PROGRESSES.
- CONTRACTOR SHALL MAINTAIN ALL LAWN AREAS UNTIL FINAL ACCEPTANCE. THIS SHALL INCLUDE, BUT NOT LIMITED TO: MOWING, WATERING, WEEDING, CULTIVATING, CLEANING AND REPLACING DEAD OR BARE AREAS TO KEEP PLANTS IN A VIGOROUS, HEALTHY CONDITION.
- CONTRACTOR SHALL GUARANTEE ESTABLISHMENT OF AN ACCEPTABLE TURF AREA AND SHALL PROVIDE REPLACEMENT FROM LOCAL SUPPLY IF NECESSARY.
- IF INSTALLATION OCCURS BETWEEN SEPTEMBER 1 AND MARCH 1, ALL SOD AREAS TO BE OVER-SEEDED WITH WINTER RYEGRASS, AT A RATE OF (4) POUNDS PER ONE THOUSAND (1000) SQUARE FEET.

NT	MATERIAL	SCHEDULE

YPE	QTY	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
CM LO	66	Crepe Myrtle 'Dallas Red' Live Oak	Lagerstroemia indica 'Dallas Red' Quercus virginiana	6' ht. 3" cal.	container, 3 or 5 trunks, 4' spread min.,tree forr container, 13' ht., 5' spread, 5' clear straight tru k
SHRUBS					
TYPE	QTY.	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
DYH IH LOR NPH	14 11 24 27	Dwarf Yaupon Holly Indian Hawthorn 'Clara' Loropetalum 'Ruby' Needlepoint Holly	llex vomitoria 'nana' Rhaphiolepis indica 'clara' Loropetalum chinensis 'Ruby' llex cornuta "Needlepoint'	5 gal. 5 gal. 5 gal. 5 gal.	container, 18" ht., 18" spread container, 20" ht., 20" spread container, 20" ht., 20" spread container , 24" ht., 20" spread
GROUNE	COVERS				
TYPE	QTY	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
		'419' Bermudagrass	Cynodon dactylon '419'		Solid Sod refer to notes

LANDSCAPE ARCHITECT STUDIO GREEN SPOT, INC 1784 W. McDERMOTT DR. SUITE 110 ALLEN, TEXAS 75013 (469) 369-4448 CHRIS@STUDIOGREENSPOT



$\mathbf{\Omega}$ $\mathbf{\Omega}$ AKE GE Ш

'ATER'

DRIVE TEXAS

<u>N</u>

ISSUE: FOR APPROVAL 11.21.2019

DATE: 11.21.2019

SHEET NAME: LANDSCAPE PLAN

SHEET NUMBER:

SECTION 02900 - LANDSCAPE

PART 1 - GENERAL

REFERENCED DOCUMENTS

Refer to bidding requirements, special provisions, and schedules for additional requirements.

DESCRIPTION OF WORK

Work included: Furnish all supervision, labor, materials, services, equipment and appliances required to complete the work covered in conjunction with the landscaping covered in these specifications and landscaping plans, including:

- Planting (trees, shrubs, and grass)
- Bed preparation and fertilization Notification of sources
- Water and Maintenance until final acceptance Guarantee

REFERENCE STANDARDS

ART 3 - EXECUTION

C. Grass Areas:

INSTALLATION

materials.

BED PREPARATION & FERTILIZATION

All planting areas shall be conditioned as follows:

batter board against the bed areas.

- American Standard for Nursery Stock published by American Association of Nurserymen. 27 October 1980, Edition; by American National Standards Institute, Inc. (Z60.1) – plant
- American Joint Committee on Horticultural Nomenclature: 1942 Edition of Standardized
- Texas Association of Nurserymen, Grades and Standards.
- Hortis Third, 1976 Cornell University

NOTIFICATION OF SOURCES AND SUBMITTALS

- The Contractor shall, within ten (10) days following acceptance of bid, notify the Architect/Owner of the sources of plant materials and bed preparation required for the
- Samples: Provide representative quantities of sandy loam soil, mulch, bed mix material, gravel, and crushed stone. Samples shall be approved by Architect before use on
- Product Data: Submit complete product data and specifications on all other specified
- Submit three representative samples of each variety of ornamental trees, shrubs, and groundcover plants for Architect's approval. When approved, tag, install, and maintain as representative samples for final installed plant materials.
- File Certificates of Inspection of plant material by state, county, and federal authorities with Architect, if required

Landscape Contractor to inspect all existing conditions and report any deficiencies to the

Prepare new planting beds by scraping away existing grass and weeds as necessary.

Till existing soil to a depth of six (6") inches prior to placing compost and fertilizer.

compost and till into a depth of six (6") inches of the topsoil. Apply organic fertilizer

such as Sustane or Green Sense at the rate of twenty (20) pounds per one thousand

Apply fertilizer as per manufacturers recommendations. Add six (6") inches of

3. Backfill for tree pits shall be as follows: Use existing top soil on site (use imported

1. Areas to be Solid Sod Bermudagrass: Blocks of sod should be laid joint to joint,

topsoil where they are evidently gaped open, then watered thoroughly.

topsoil as needed) free from large clumps, rocks, debris, caliche, subsoils, etc.,

(staggered joints) after fertilizing the ground first. Roll grass areas to achieve a smooth, even surface. The joints between the blocks of sod should be filled with

2. Areas to be Hydromulch Common Bermudagrass: Hydromulch with bermudagrass

Maintenance of plant materials shall begin immediately after each plant is delivered to the

Plant materials shall be delivered to the site only after the beds are prepared and area

ready for planting. All shipments of nursery materials shall be thoroughly protected from

the drying winds during transit. All plants which cannot be planted at once, after delivery

to the site, shall be well protected against the possibility of drying by wind and sun. Balls

of earth of B & B plants shall be kept covered with soil or other acceptable material. All

Notify the Landscape Architect for inspection and approval of all positioning of plant

Excavate pits with vertical sides and horizontal bottom. Tree pits shall be large enough to

permit handling and planting without injury to balls of earth or roots and shall be of such

depth that, when planted and settled, the crown of the plant shall bear the same

relationship to the finish grade as it did to soil surface in original place of growth.

plants remain the property of the Contractor until final acceptance.

Position the trees and shrubs in their intended location as per plan

site and shall continue until all construction has been satisfactorily accomplished.

seed at a rate of two (2) pounds per one thousand (1,000) square feet. Use a 4' x 8'

All planting areas shall receive a two (2") inch layer of specified mulch.

placed in nine (9") inch layers and watered in thoroughly.

F. Soil Analysis: Provide sandy loam soil analysis if requested by the Architect.

JOB CONDITIONS

- General Contractor to complete the following punch list: Prior to Landscape Contractor initiating any portion of landscape installation, General Contractor shall leave planting bed areas three (3") inches below finish grade of sidewalks, drives and curbs as shown on the drawings. All lawn areas to receive solid sod shall be left one (1") inch below the finish grade of sidewalks, drives, and curbs. All construction debris shall be removed prior to Landscape Contractor beginning any work.
- B. General Contractor shall provide topsoil as described in Section 02200 Earthwork.
- Storage of materials and equipment at the job site will be at the risk of the Landscape Contractor. The Owner cannot be held responsible for theft or damage.

MAINTENANCE AND GUARANTEE

Maintenance:

- 1. The Landscape Contractor will be held responsible for the maintenance of all work from the time of planting until final acceptance by the Owner. No trees, shrubs, groundcover or grass will be accepted unless they show a healthy growth and
- satisfactory foliage conditions. Maintenance shall include watering of trees and plants, cultivation, weeding spraying, edging, pruning of trees, mowing of grass, cleaning up and all other work necessary of maintenance.
- 3. A written notice requesting final inspection and acceptance should be submitted to the Owner at least seven (7) days prior to completion. An on-site inspection by
- Owner and Landscape Contractor will be completed prior to written acceptance. 4. After final acceptance of installation, the Landscape Contractor will not be required to do any of the above listed work.

B. Guarantee:

- 1. Trees shall be guaranteed for a twelve (12) month period after acceptance. Shrubs and groundcover shall be guaranteed for twelve (12) months. The Contractor shall replace all dead materials as soon as weather permits and upon notification of the Owner. Plants, including trees, which have partially died so that shape, size, or symmetry has been damaged, shall be considered subject to replacement. In such
- cases, the opinion of the Owner shall be final. a. Plants used for replacement shall be of the same size and kind as those originally planted and shall be planted as originally specified. All work, including materials, labor and equipment used in replacements, shall carry a twelve (12) month guarantee. Any damage, including ruts in lawn or bed areas, incurred as a result of making replacements shall be immediately
- b. At the direction of the Owner, plants may be replaced at the start of the next year's planting season. In such cases, dead plants shall be removed from the
- premises immediately. c. When plant replacements are made, plants, soil mix, fertilizer and mulch are to be utilized as originally specified and reinspected for full compliance with Contract requirements. All replacements are to be included under "Work" of this section.

- 2. The Owner agrees that for the guarantee to be effective, he will water plants at least twice a week during dry periods and cultivate beds once a month after final
- 3. The above guarantee shall not apply where plants die after acceptance because of injury from storms, hail, freeze, insects, diseases, injury by humans, machines or
- 4. Acceptance for all landscape work shall be given after final inspection by the Owner provided the job is in a completed, undamaged condition, and there is a stand of grass in all lawn areas. At this time, the Owner will assume maintenance on the accepted work.
- Repairs: Any necessary repairs under the Guarantee must be made within ten (10) days after receiving notice, weather permitting, and in the event the Landscape Contractor does not make repairs accordingly, the Owner, without further notice to Contractor, may provide materials and men to make such repairs at the expense of the Landscape

QUALITY ASSURANCE

Contractor.

- General: Comply with applicable Federal, State, County and Local regulations governing landscape materials and work
- Personnel: Employ only experienced personnel who are familiar with the required work. Provide full time supervision by a qualified foreman acceptable to Landscape Architect.
- Selection of Plant Material:
- 1. Make contact with suppliers immediately upon obtaining notice of contract acceptance to select and book materials. Develop a program of maintenance (pruning and fertilization) which will insure the purchased materials will meet and/or exceed project specifications
- 2. Landscape Architect will provide a key identifying each tree location on site. Written verification will be required to document material selection, source and delivery schedules to site.
- 3. Owner and/or Architect shall inspect all plant materials when reasonable at place of growth for compliance with requirements for genus, species, cultivar/variety, size and 4. Owner and/or Architect retains the right to further inspect all plant material upon arrival at the site and during installation for size and condition of root balls, limbs,
- branching habit, insects, injuries, and latent defects. 5. Owner and/or Architect may reject unsatisfactory or defective material at any time during the process of work. Remove rejected materials from the site immediately. Plants damaged in transit or at job site shall be rejected.

PRODUCT DELIVERY, STORAGE AND HANDLING

Preparation:

- Balled and Burlapped (B&B) Plants: Dig and prepare shipment in a manner that will not damage roots, branches, shape, and future development.
- 2. Container Grown Plants: Deliver plants in rigid container to hold ball shape and

- 1. Deliver packaged materials in sealed containers showing weight, analysis and name of manufacturer. Protect materials from deterioration during delivery and while stored
- 2. Deliver only plant materials that can be planted in one day unless adequate storage and watering facilities are available on job site.
- 3. Protect root balls by heeling in with sawdust or other approved moisture retaining material if not planted within 24 hours of delivery.
- 4. Protect plants during delivery to prevent damage to root balls or desiccation of leaves. Keep plants moist at all times. Cover all materials during transport.
- 5. Notify Architect of delivery schedule 72 hours in advance so plant material may be observed upon arrival at job site. 6. Remove rejected plant material immediately from site.
- 7. To avoid damage or stress, do not lift, move, adjust to plumb, or otherwise manipulate plants by trunk or stems.

PART 2 - PRODUCTS

2.1 PLANTS

- General: Well-formed No. 1 grade or better nursery grown stock. Listed plant heights are from tops of root balls to nominal tops of plants. Plant spread refers to nominal outer width of the plant, not to the outer leaf tips. Plants will be individually approved by the Architect and his decision as to their acceptability shall be final.
- Quantities: The drawings and specifications are complimentary. Anything called for on one and not the other is as binding as if shown and called for on both. The plant schedule

is an aid to bidders only. Confirm all quantities on plan.

- C. Quality and size: Plant materials shall conform to the size given on the plan, and shall be healthy, symmetrical, well-shaped, full branched, and well rooted. The plants shall be free from injurious insects, diseases, injuries to the bark or roots, broken branches, objectionable disfigurements, insect eggs and larvae and are to be of specimen quality.
- Approval: All plant materials shall be subject to the approval of the Owner. All plants which are found unsuitable in growth, or in any unhealthy, badly shaped, or undersized condition, will be rejected by the Landscape Architect, either before or after planting, and shall be removed at the expense of the Landscape Contractor and replaced with acceptable plants as specified.
- Trees shall be healthy, full-branched, well-shaped and shall meet the trunk diameter and height requirements of the plant schedule. Balls shall be firm, neat, slightly tapered, and well wrapped in burlap. Any tree loose in the ball or with broken ball at time of planting will be rejected. Balls shall be ten (10") inched in diameter for each one (1") inch of trunk diameter, Measured six (6") inched above ball. Nomenclature conforms to the customary nursery usage: for clarification, the term "multi-trunk" defines a plant having three (3) or more trunks of nearly equal diameter
- Pruning: All pruning of trees and shrubs, as directed by the Landscape Architect, shall be executed by the Landscape Contractor at no additional cost to the Owner

2.2 SOIL PREPARATION MATERIALS


- A. Sandy Loam:
- 1. Friable, fertile, dark, loamy soil, free of clay lumps, subsoil, stones and other extraneous material and reasonably free of weeds and foreign grasses. Loam containing Dallasgrass or Nutgrass shall be rejected.
- 2. Physical properties as follows: Clay - between 7-27 percent Silt – between 15-25 percent
- Sand less than 52 percent Organic matter shall be 3%-10% of total dry weight. 4. If requested, provide a certified soil analysis conducted by an approved soil testing
- laboratory verifying that sandy loam meets the above requirements. Organic Material: Compost with a mixture of 80% vegetative matter and 20% animal
- waste. Ingredients should be a mix of course and fine textured material. Premixed Bedding Soil as supplied by Vital Earth Resources, Gladewater, Texas;
- Professional Bedding Soil as supplied by Living Earth Technology, Dallas, Texas or Acid Gro Municipal Mix as supplied by Soil Building Systems, Dallas, Texas or approved equal.
- D. Sharp Sand: Sharp sand must be free of seeds, soil particles and weeds. Mulch: Double Shredded Hardwood Mulch, partially decomposed, dark brown. Living
- Earth Technologies or approved equal. Organic Fertilizer: Fertilaid, Sustane, or Green Sense or equal as recommended for
- required applications. Fertilizer shall be delivered to the site in original unopened containers, each bearing the manufacturer's guaranteed statement of analysis.
- Commercial Fertilizer: 10-20-10 or similar analysis. Nitrogen source to be a minimum 50% slow release organic Nitrogen (SCU or UF) with a minimum 8% sulphur and 4% iron, plus micronutrients.
- B. Peat: Commercial sphagnum peat moss or partially decomposed shredded pine bark or other approved organic material.


MISCELLANEOUS MATERIALS


- A. Steel Edging: Shall be Ryerson "Estate Curbing", 1/8" x 4" with stakes 4' on center.
- B. Staking Material for Shade Trees:
- 1. Post: Studded T-Post, #1 Armco with anchor plate; 6'-0" length; paint green. 2. Wire: 12 gauge, single strand, galvanized wire.

3. Rubber hose: 2 ply, fiber reinforced hose, minimum ½ inch inside diameter. Color:

- Gravel: Washed native pea gravel, graded 1 in. to 1-1/2 in.
- Filter Fabric: Mirafi 140N by Celanese Fibers Marketing Company, available at Loftland Co., (214) 631-5250 or approved equal.

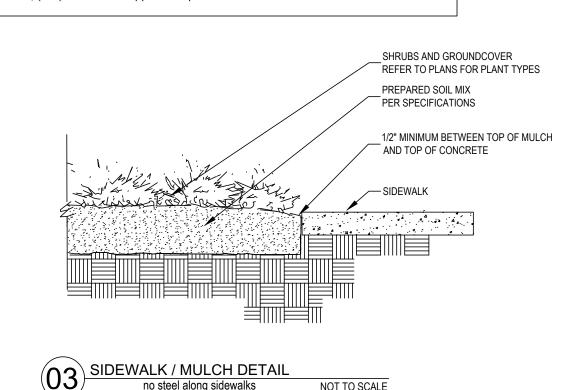


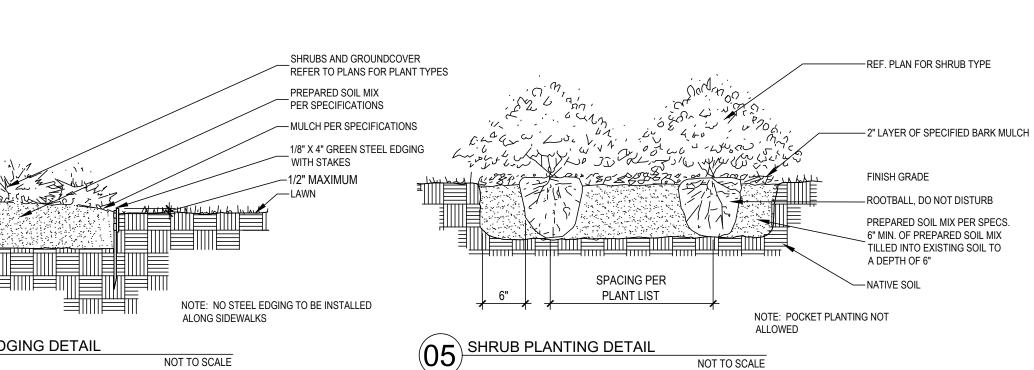

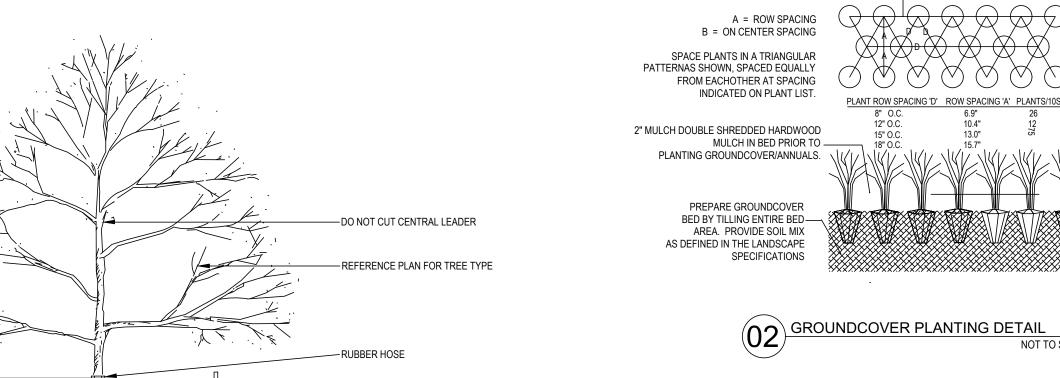

TO SECURE TREE AGAINST SEASONAL

PREVAILING WINDS.

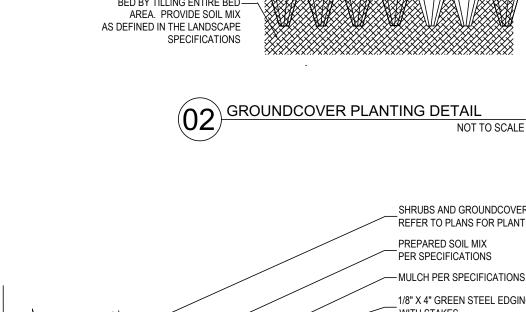

EDGE OF BED

STEEL EDGING DETAIL

4 $\mathbf{\Omega}$ $\mathbf{\omega}$ 5 4 C Ш **ATE**

DRIVI TEXA

O O

LANDSCAPE ARCHITECT

STUDIO GREEN SPOT, INC

1784 W. McDERMOTT DR.

SUITE 110

ALLEN, TEXAS 75013

(469) 369-4448

CHRIS@STUDIOGREENSPOT.

ISSUE: FOR APPROVAL 11.21.2019

 \geq

11.21.2019

SHEET NAME:

LANDSCAPE SPECIFICATIONS

SHEET NUMBER

Shrub and tree pits shall be no less than two (2') feet, twenty-four (24") inches, wider than the lateral dimension of earth ball and six (6") inches deeper than it's vertical dimension. Remove and haul from site all rocks and stones over one (1") inch in diameter. Plants Dig a wide, rough sided hole exactly the same depth as the height of the ball, especially a the surface of the ground. The sides of the hole should be rough and jagged, never slick Percolation Test: Fill the hole with water. If the water level does not percolate within 24 hours, the tree needs to move to another location or have drainage added. Install a PVC Backfill only with 5 parts existing soil or sandy loam and 1 part bed preparation. When the hole is dug in solid rock, topsoil from the same area should not be used. Carefully settle by watering to prevent air pockets. Remove the burlap from the top 1/3 of the ball. as well as all nylon, plastic string and wire mesh. Container trees will usually be pot Mulch the top of the ball. Do not plant grass all the way to the trunk of the tree. Leave the area above the top of the ball and mulch with at least two (2") inches of specified mulch. 4" DIA. PERFORATED PVC PIPE W/ CAP -PAINTED BLACK

inches over the entire bed or pit. Obstruction below ground: In the event that rock, or underground construction work or obstructions are encountered in any plant pit excavation work to be done under this section, alternate locations may be selected by the Owner. Where locations cannot be changed, the obstructions shall be removed to a depth of not less than three (3') feet below grade and no less than six (6") inches below the bottom of ball when plant is properly set at the required grade. The work of this section shall include the removal from the site of such rock or underground obstructions encountered at the cost of the Landscape Contractor.

All plant beds and trees to be mulched with a minimum settled thickness of two (2")

should be thoroughly moist before removing containers.

bound, if so follow standard nursery practice of 'root scoring'.

stand pipe per tree planting detail as approved by the Landscape Architect

- Trees and large shrubs shall be staked as site conditions require. Position stakes to secure tree against seasonal prevailing winds.
- Pruning and Mulching: Pruning shall be directed by the Architect and shall be pruned in accordance with standard horticultural practice following Fine Pruning, Class I pruning standards provided by National Arborist Association.
- 1. Dead wood or suckers and broken badly bruised branches shall be removed. General tipping of the branched is not permitted. Do not cut terminal branches. Pruning shall be done with clean, sharp tools.
- Immediately after planting operations are completed, all tree pits shall be covered with a layer of organic material two (2") inches in depth. This limit of the organic material Steel Curbing Installation:
- 1. Curbing shall be aligned as indicated on plans. Stake out limits of steel curbing and obtain Owners approval prior to installation.
- All steel curbing shall be free of kinks and abrupt bends. Top of curbing shall be 3/4" maximum height above grade. . Stakes are to be installed on the planting bed side of the curbing, as opposed to the
- Do not install steel edging along sidewalks. 3. Cut steel edging at 45 degree angle where edging meets sidewalk.

CLEANUP AND ACCEPTANCE

J. Do not wrap trees.

K. Do not over prune.


Cleanup: During the work, the premises shall be kept neat and orderly at all times. Storage areas for all materials shall be so organized that they, too, are neat and orderly. All trash and debris shall be removed from the site as work progresses. Keep paved areas clean by sweeping or hosing at end of each days work.

END OF SECTION

2 STRANDS NO. 12 GAUGE GALVANIZED WIRE, TWISTED -2" LAYER MULCH, REF. SPECIFICATIONS -2" HIGH WATERING RING (3) METAL T-POST PAINTED GREEN TRIANGULAR SPACING. -FINISH GRADE SCARIFY SIDES ROOTBALL, DO NOT DISTURB. TOP -OF ROOTBALL TO BE SET 1" ABOVE EXISTING GRADE. REMOVE TOP 1/3 BURLAP. -NATIVE SOIL, REF. SPECIFICATIONS -CRUSHED ROCK NOTE: LOCATE STAKES OUTSIDE OF TREE WELL. POSITION STAKES

OF ROOTBALL TREE PLANTING DETAIL

NOT TO SCALE

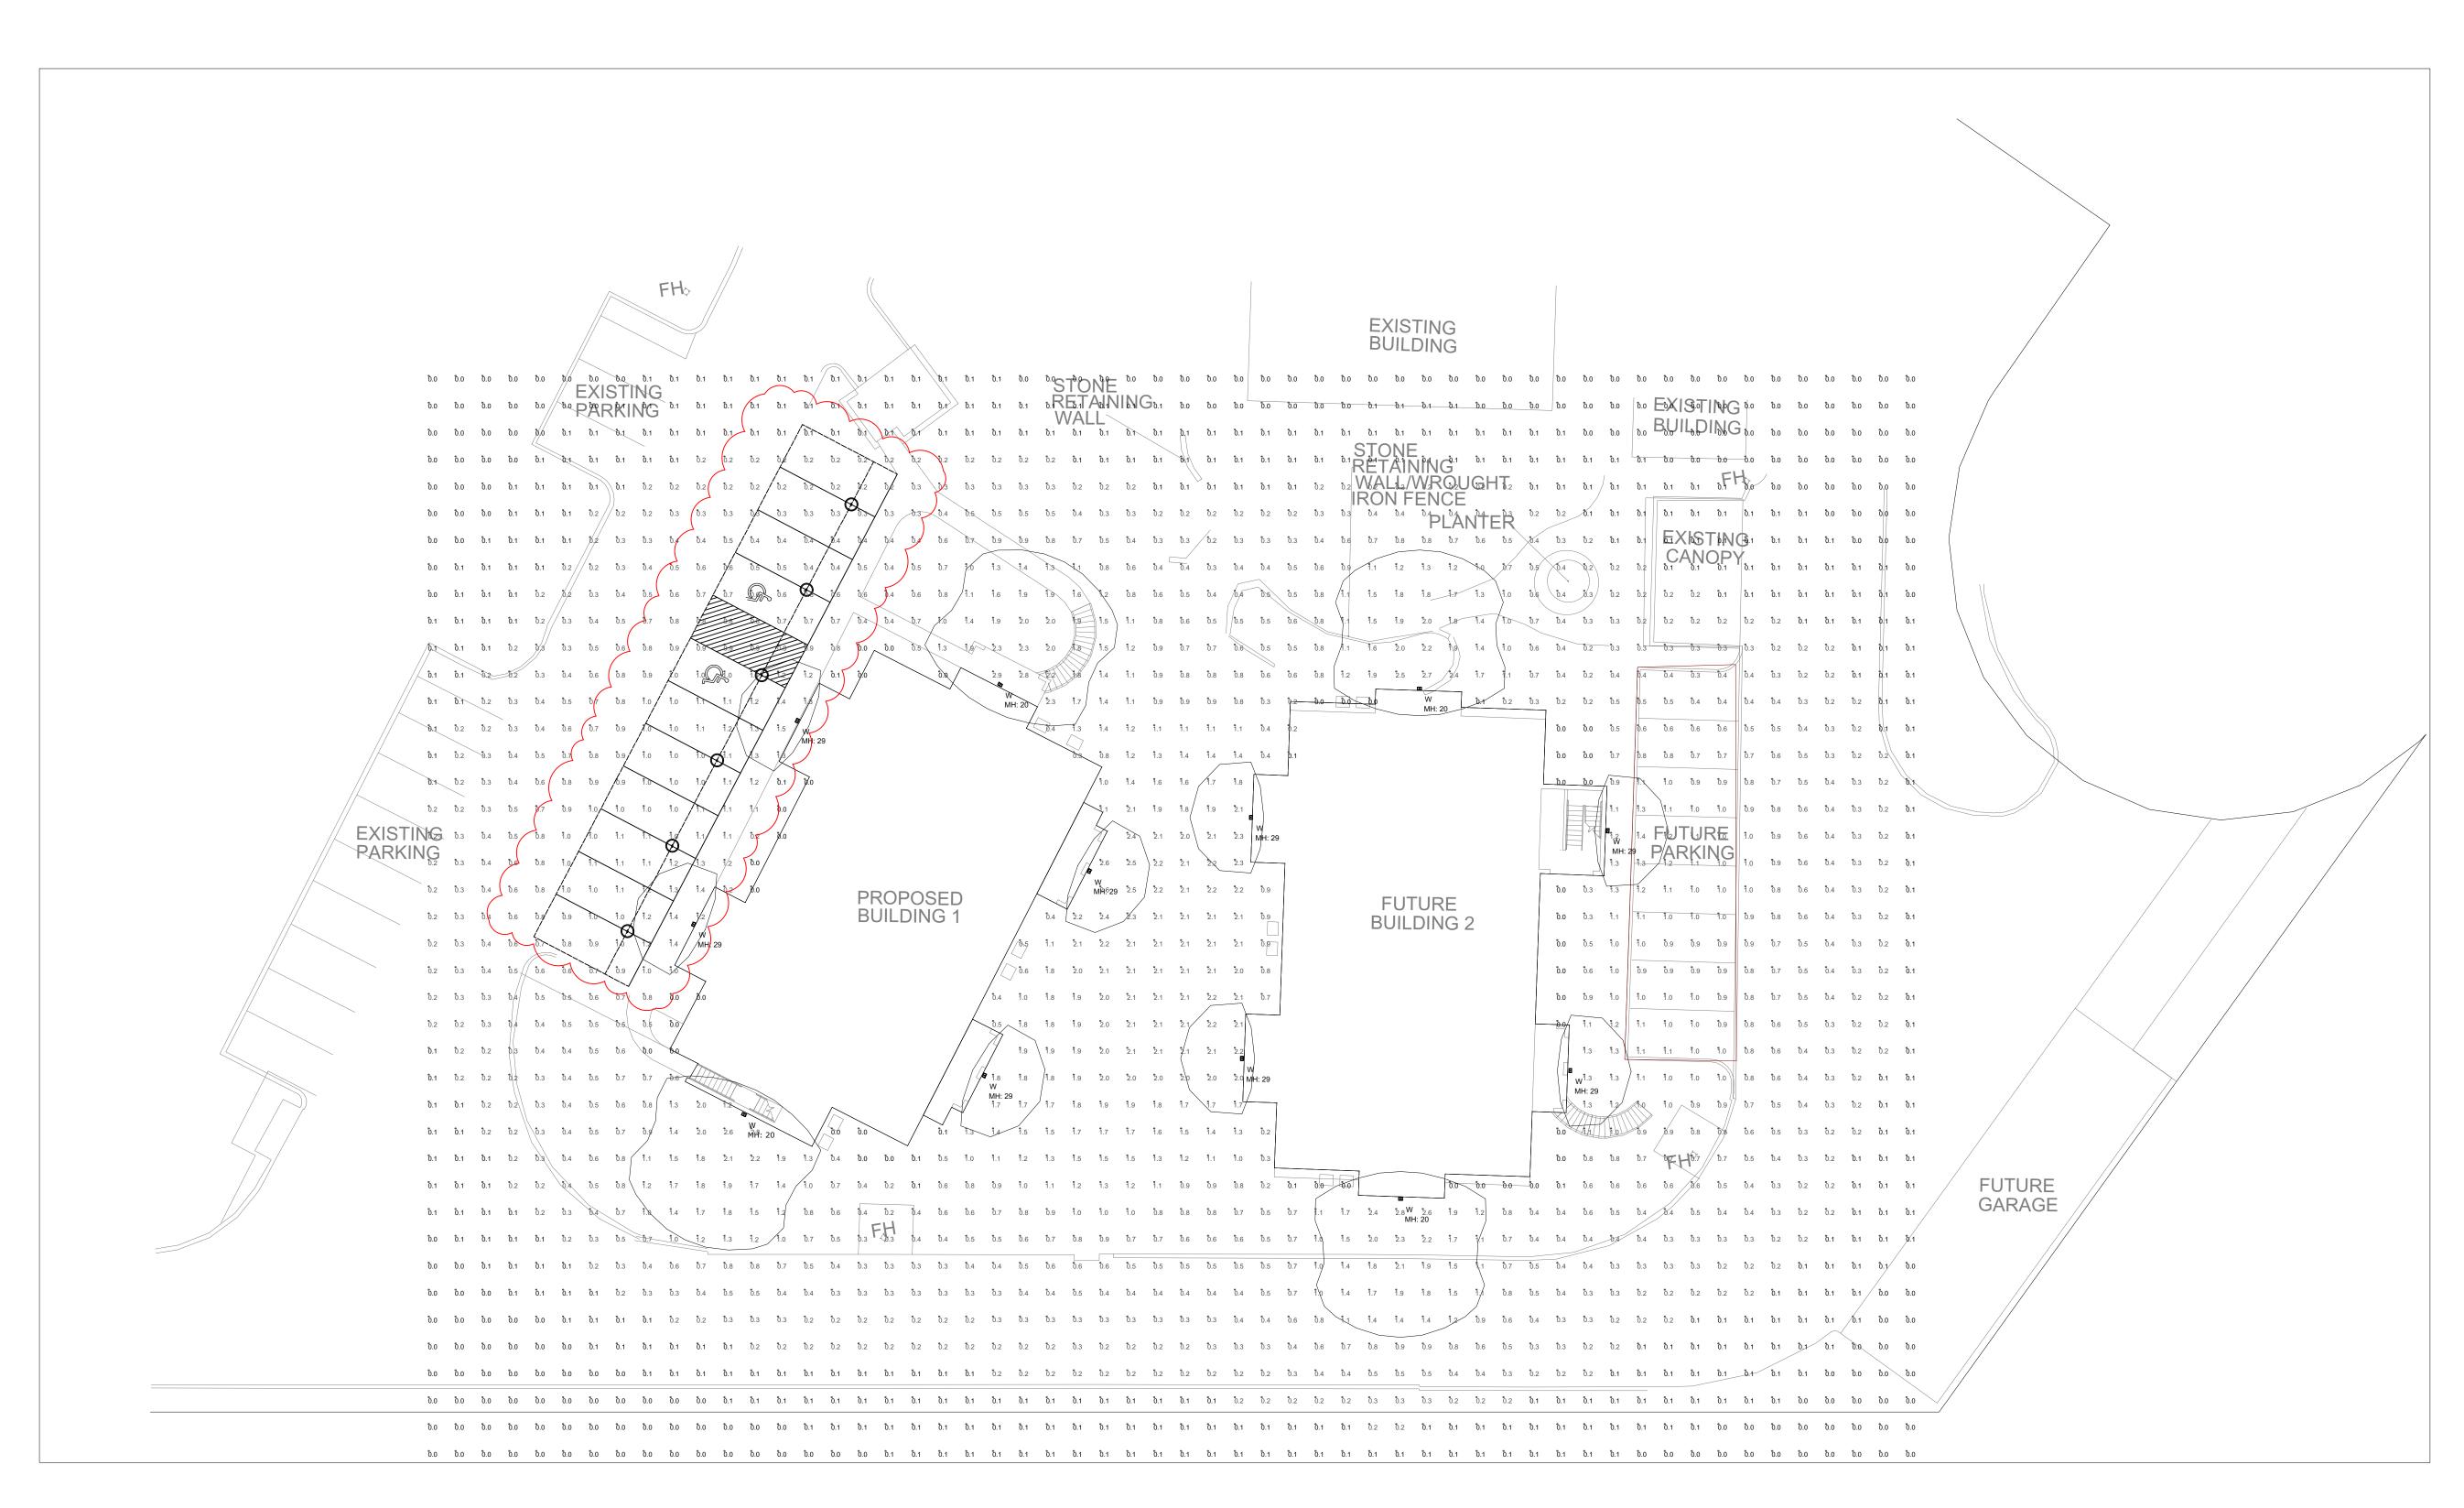

Luminair	e Schedule	9						
Symbol	Type	Qty	Manufacturer / Catalog Number	Total Lumen Output	Total Input Watts	Ballast Factor	Light Lost Factor	User Defined Factor
•	W	12	LITHONIA WDGE2 LED P3 40K 80CRI VW VOLTAGE MOUNTING FINISH	3214	22.55	1.000	0.808	1.000
O		6	LUXRITE LED Canopy Light LED 28W 3CCT 3000K	3360	28		0.70	1.000


Calculation Grid Location	Calc. Height (Ft.)	Units	Avg	Max	Min	Avg/Min
GRADE_Planar	0	Fc	0.53	2.9	0.0	N.A.
PARKING1		Fc	0.83	1.4	0.1	8.30
PARKING2		Fc	0.90	1.4	0.3	3.00

Illuminance (Fc)
Average = 0.83
Maximum = 1.4
Minimum = 0.1
Avg/Min Ratio = 8.30
Max/Min Ratio = 14.00

PARKING1

Illuminance (Fc)
Average = 0.90
Maximum = 1.4
Minimum = 0.3
Avg/Min Ratio = 3.00
Max/Min Ratio = 4.67

PARKING2

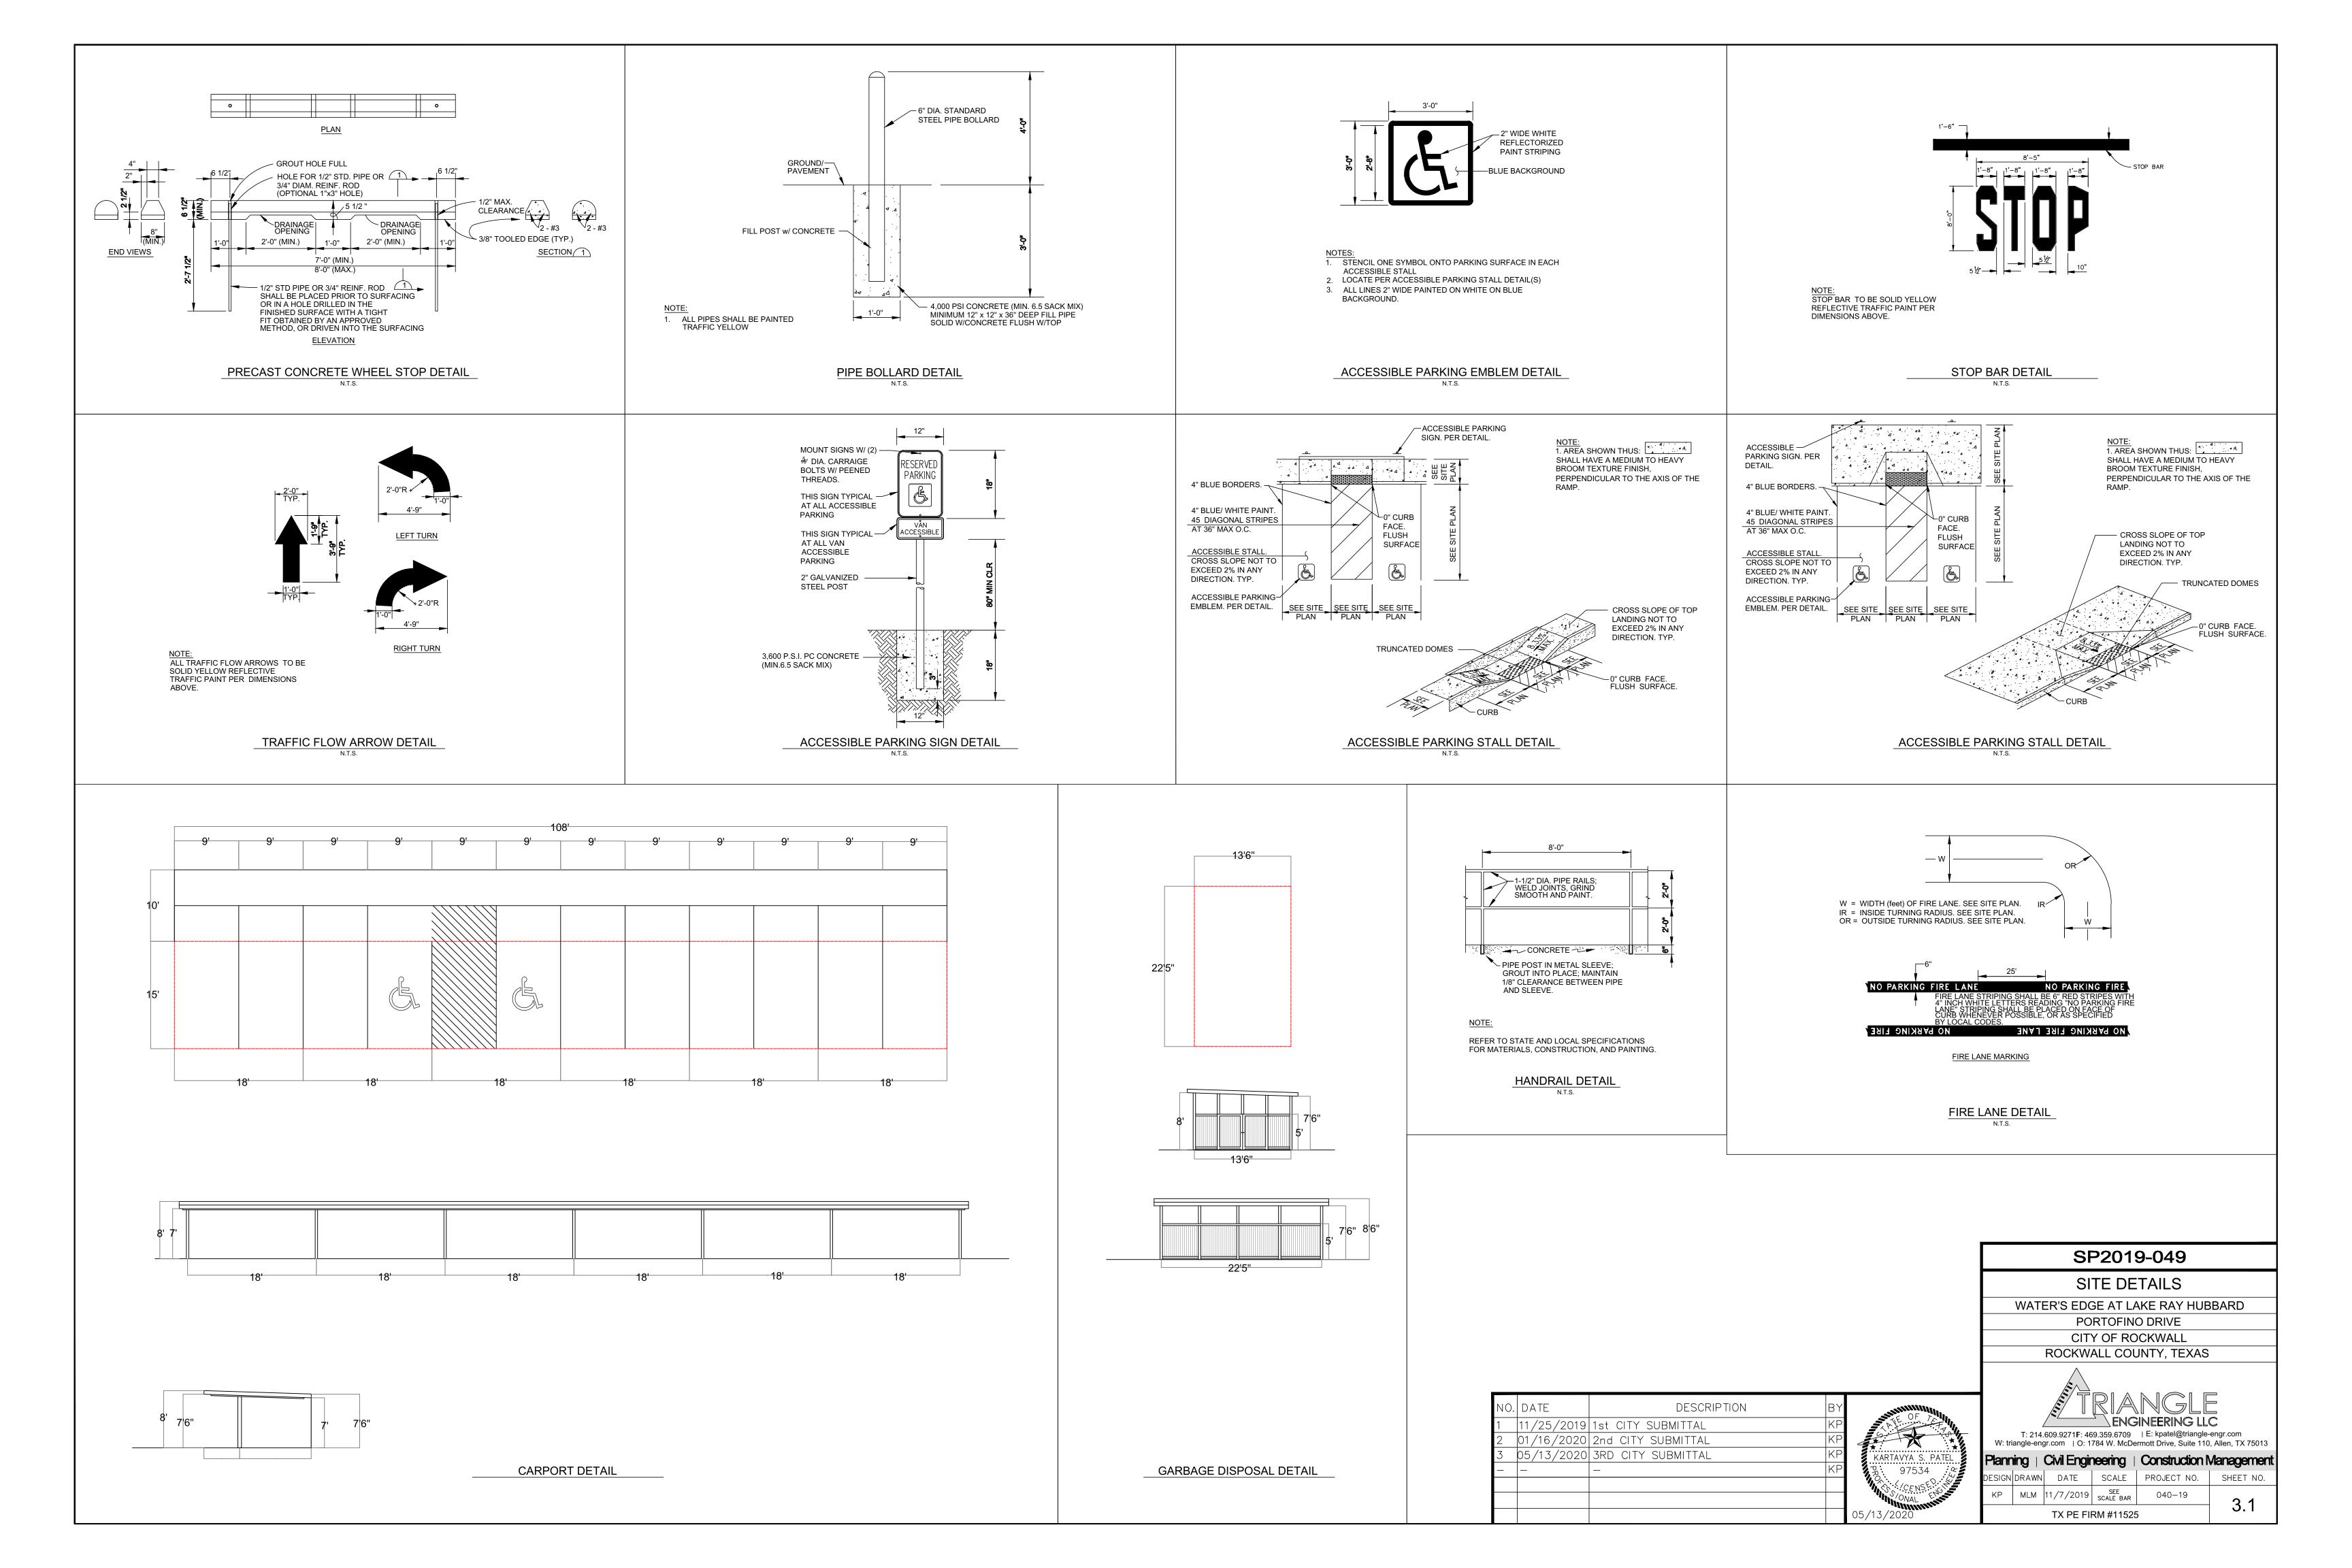



CITY OF ROCKWALL

PLANNING AND ZONING COMMISSION MEMORANDUM

PLANNING AND ZONING DEPARTMENT

385 S. GOLIAD STREET • ROCKWALL, TX 75087

PHONE: (972) 771-7745 • EMAIL: PLANNING@ROCKWALL.COM

TO: Planning and Zoning Commission

DATE: September 12, 2023

APPLICANT: Daniyal M. Awam; *Plutus21 Development Fund 5, LLC*

CASE NUMBER: SP2023-027; Amended Site Plan for 2000-2038 Portofino Circle

On May 4, 2019, staff administratively approved a site plan [Case No. SP2019-049] to allow the construction of two (2) condominium buildings that were never constructed as part of an expired site plan [Case No. PZ2000-120]. As part of the approved building elevations, there were curved stairways that allowed access to the different floors of the buildings. The applicant has since revised the stairways prompting them to resubmit for an amended site plan. Based on the proposed building elevations provided by the applicant, the stairwell will now step down in a square fashion, which is more typical of garden style condominiums or apartments. In addition to the changes to the building elevations, the applicant is proposing a landscaped amenity area on the northside of the subject property. In reviewing this request, staff has determined that the proposed amended site plan meets all of the density and dimensional requirements outlined within the Unified Development Code (UDC) and Planned Development District 22 (PD-22). On August 29, 2023, the Architectural Review Board (ARB) reviewed the proposed changes to the approved building elevations and approved a motion to recommend approval by a vote of 3-0, with Board Members Meyrat and Hudson absent and two (2) vacant positions on the board. Should the Planning and Zoning Commission have any questions concerning the applicant's request, staff and the applicant will be available at the September 12, 2023 Planning and Zoning Commission meeting.



DEVELOPMENT APPLICATION

City of Rockwall
Planning and Zoning Department
385 S. Goliad Street
Rockwall, Texas 75087

Ì	PLANNING & ZONING CASE NO.
	<u>NOTE:</u> THE APPLICATION IS NOT CONSIDERED ACCEPTED BY THE CITY UNTIL THE PLANNING DIRECTOR AND CITY ENGINEER HAVE SIGNED BELOW.
	DIRECTOR OF PLANNING:
	CITY ENGINEER:

	Rockwall, Texas 75067	CITYE	NGINEER:
PLEASE CHECK THE	APPROPRIATE BOX BELOW TO INDICATE THE TYPE O	F DEVELOPMENT REQ	UEST [SELECT ONLY ONE BOX];
☐ PRELIMINARY F ☐ FINAL PLAT (\$3 ☐ REPLAT (\$300.0 ☐ AMENDING OR ☐ PLAT REINSTAT SITE PLAN APPLIC ☐ SITE PLAN (\$25	(\$100.00 + \$15.00 ACRE) 1 PLAT (\$200.00 + \$15.00 ACRE) 1 00.00 + \$20.00 ACRE) 1 10 + \$20.00 ACRE) 1 MINOR PLAT (\$150.00) FEMENT REQUEST (\$100.00)	☐ SPECIFIC USE ☐ PD DEVELOP! OTHER APPLICA ☐ TREE REMOV. ☐ VARIANCE RE NOTES: : IN DETERMINING THE PER ACRE AMOUNT. FI 2: A \$1,000.00 FEE WI	NGE (\$200.00 + \$15.00 ACRE) 1 E PERMIT (\$200.00 + \$15.00 ACRE) 1 8 2 MENT PLANS (\$200.00 + \$15.00 ACRE) 1 ITION FEES:
PROPERTY INFO	DRMATION [PLEASE PRINT]		
ADDRESS	BUILDING 2 , 2014-A, PORT	TOFINO DR	, ROCKWALL TX 75032
SUBDIVISION	WATERS EDGE AT LAKE		
GENERAL LOCATION	SUMMER LEE AND POI	RTOFINO S.	PIVE
ZONING, SITE PI	AN AND PLATTING INFORMATION [PLEASI	E PRINT]	
CURRENT ZONING	PD -22	CURRENT USE	CONDOMINIUMS
PROPOSED ZONING		PROPOSED USE	COMBOMINIUMS.
ACREAGE	6.5995 LOTS [CURRENT]	85	LOTS [PROPOSED] 85
REGARD TO ITS A	DPLATS: BY CHECKING THIS BOX YOU ACKNOWLEDGE TH APPROVAL PROCESS, AND FAILURE TO ADDRESS ANY OF S ENIAL OF YOUR CASE.	HAT DUE TO THE PASSA STAFF'S COMMENTS BY T	GE OF <u>HB3167</u> THE CITY NO LONGER HAS FLEXIBILITY WITH THE DATE PROVIDED ON THE DEVELOPMENT CALENDAR WILL
OWNER/APPLIC	ANT/AGENT INFORMATION [PLEASE PRINT/CHI	ECK THE PRIMARY CONT.	ACT/ORIGINAL SIGNATURES ARE REQUIRED]
✓ OWNER	PLUTUS 21 DEUELOPMENT.	✓ □ APPLICANT	
CONTACT PERSON	DANIYAL AWAN	CONTACT PERSON	
ADDRESS	11455 NEWKIRK ST	ADDRESS	
OITV OTATE B 710	# 1405	CITY, STATE & ZIP	
CITY, STATE & ZIP PHONE	DAUAS TX 75229	PHONE	
	469 853 6007 dm @ Plutus 21 · dev	E-MAIL	
		_ 17/7 (IL	
BEFORE ME, THE UNDER	CATION [REQUIRED] RSIGNED AUTHORITY, ON THIS DAY PERSONALLY APPEAREI ON ON THIS APPLICATION TO BE TRUE AND CERTIFIED THE	Daniyal A FOLLOWING:	[OWNER] THE UNDERSIGNED, WHO
B 100 + 00 AJGUST NFORMATION CONTAINE SUBMITTED IN CONJUNCT	TO COVER THE COST OF THIS APPLICATION, HA 20 23 BY SIGNING THIS APPLICATION, I AGRE D WITHIN THIS APPLICATION TO THE PUBLIC. THE CITY IS TON WITH THIS APPLICATION, IF SUCH REPRODUCTION IS ASSO	S BEEN PAID TO THE CITY (E THAT THE CITY OF ROC ALSO AUTHORIZED AND	CKWALL (I.E. "CITY") IS AUTHORIZED AND PERMITTED TO PROVIDE PERMITTED TO REPRODUCE ANY COPYRIGHTED INFORMATION
GIVEN UNDER MY HAND	AND SEAL OF OFFICE ON THIS THE 18+ DAY OF AUG	just , 2023	Comm. Expires 03-02-2026 Notary ID 133621400
NOTABLY BUTTON	OWNER'S SIGNATURE		·illin.
NUTARY PUBLIC IN AND	FOR THE STATE OF TEXAS	112 Cheistine ben	mingh MY COMMISSION EXPIRES 3.2-2626







City of Rockwall Planning & Zoning Department 385 S. Goliad Street Rockwall, Texas 75087 (P): (072) 774 7745

(P): (972) 771-7745 (W): www.rockwall.com

The City of Rockwall GIS maps are continually under development and therefore subject to change without notice. While we endeavor to provide timely and accurate information, we make no guarantees. The City of Rockwall makes no warranty, express or implied, including warranties of merchantability and fitness for a particular purpose. Use of the information is the sole responsibility of the user.



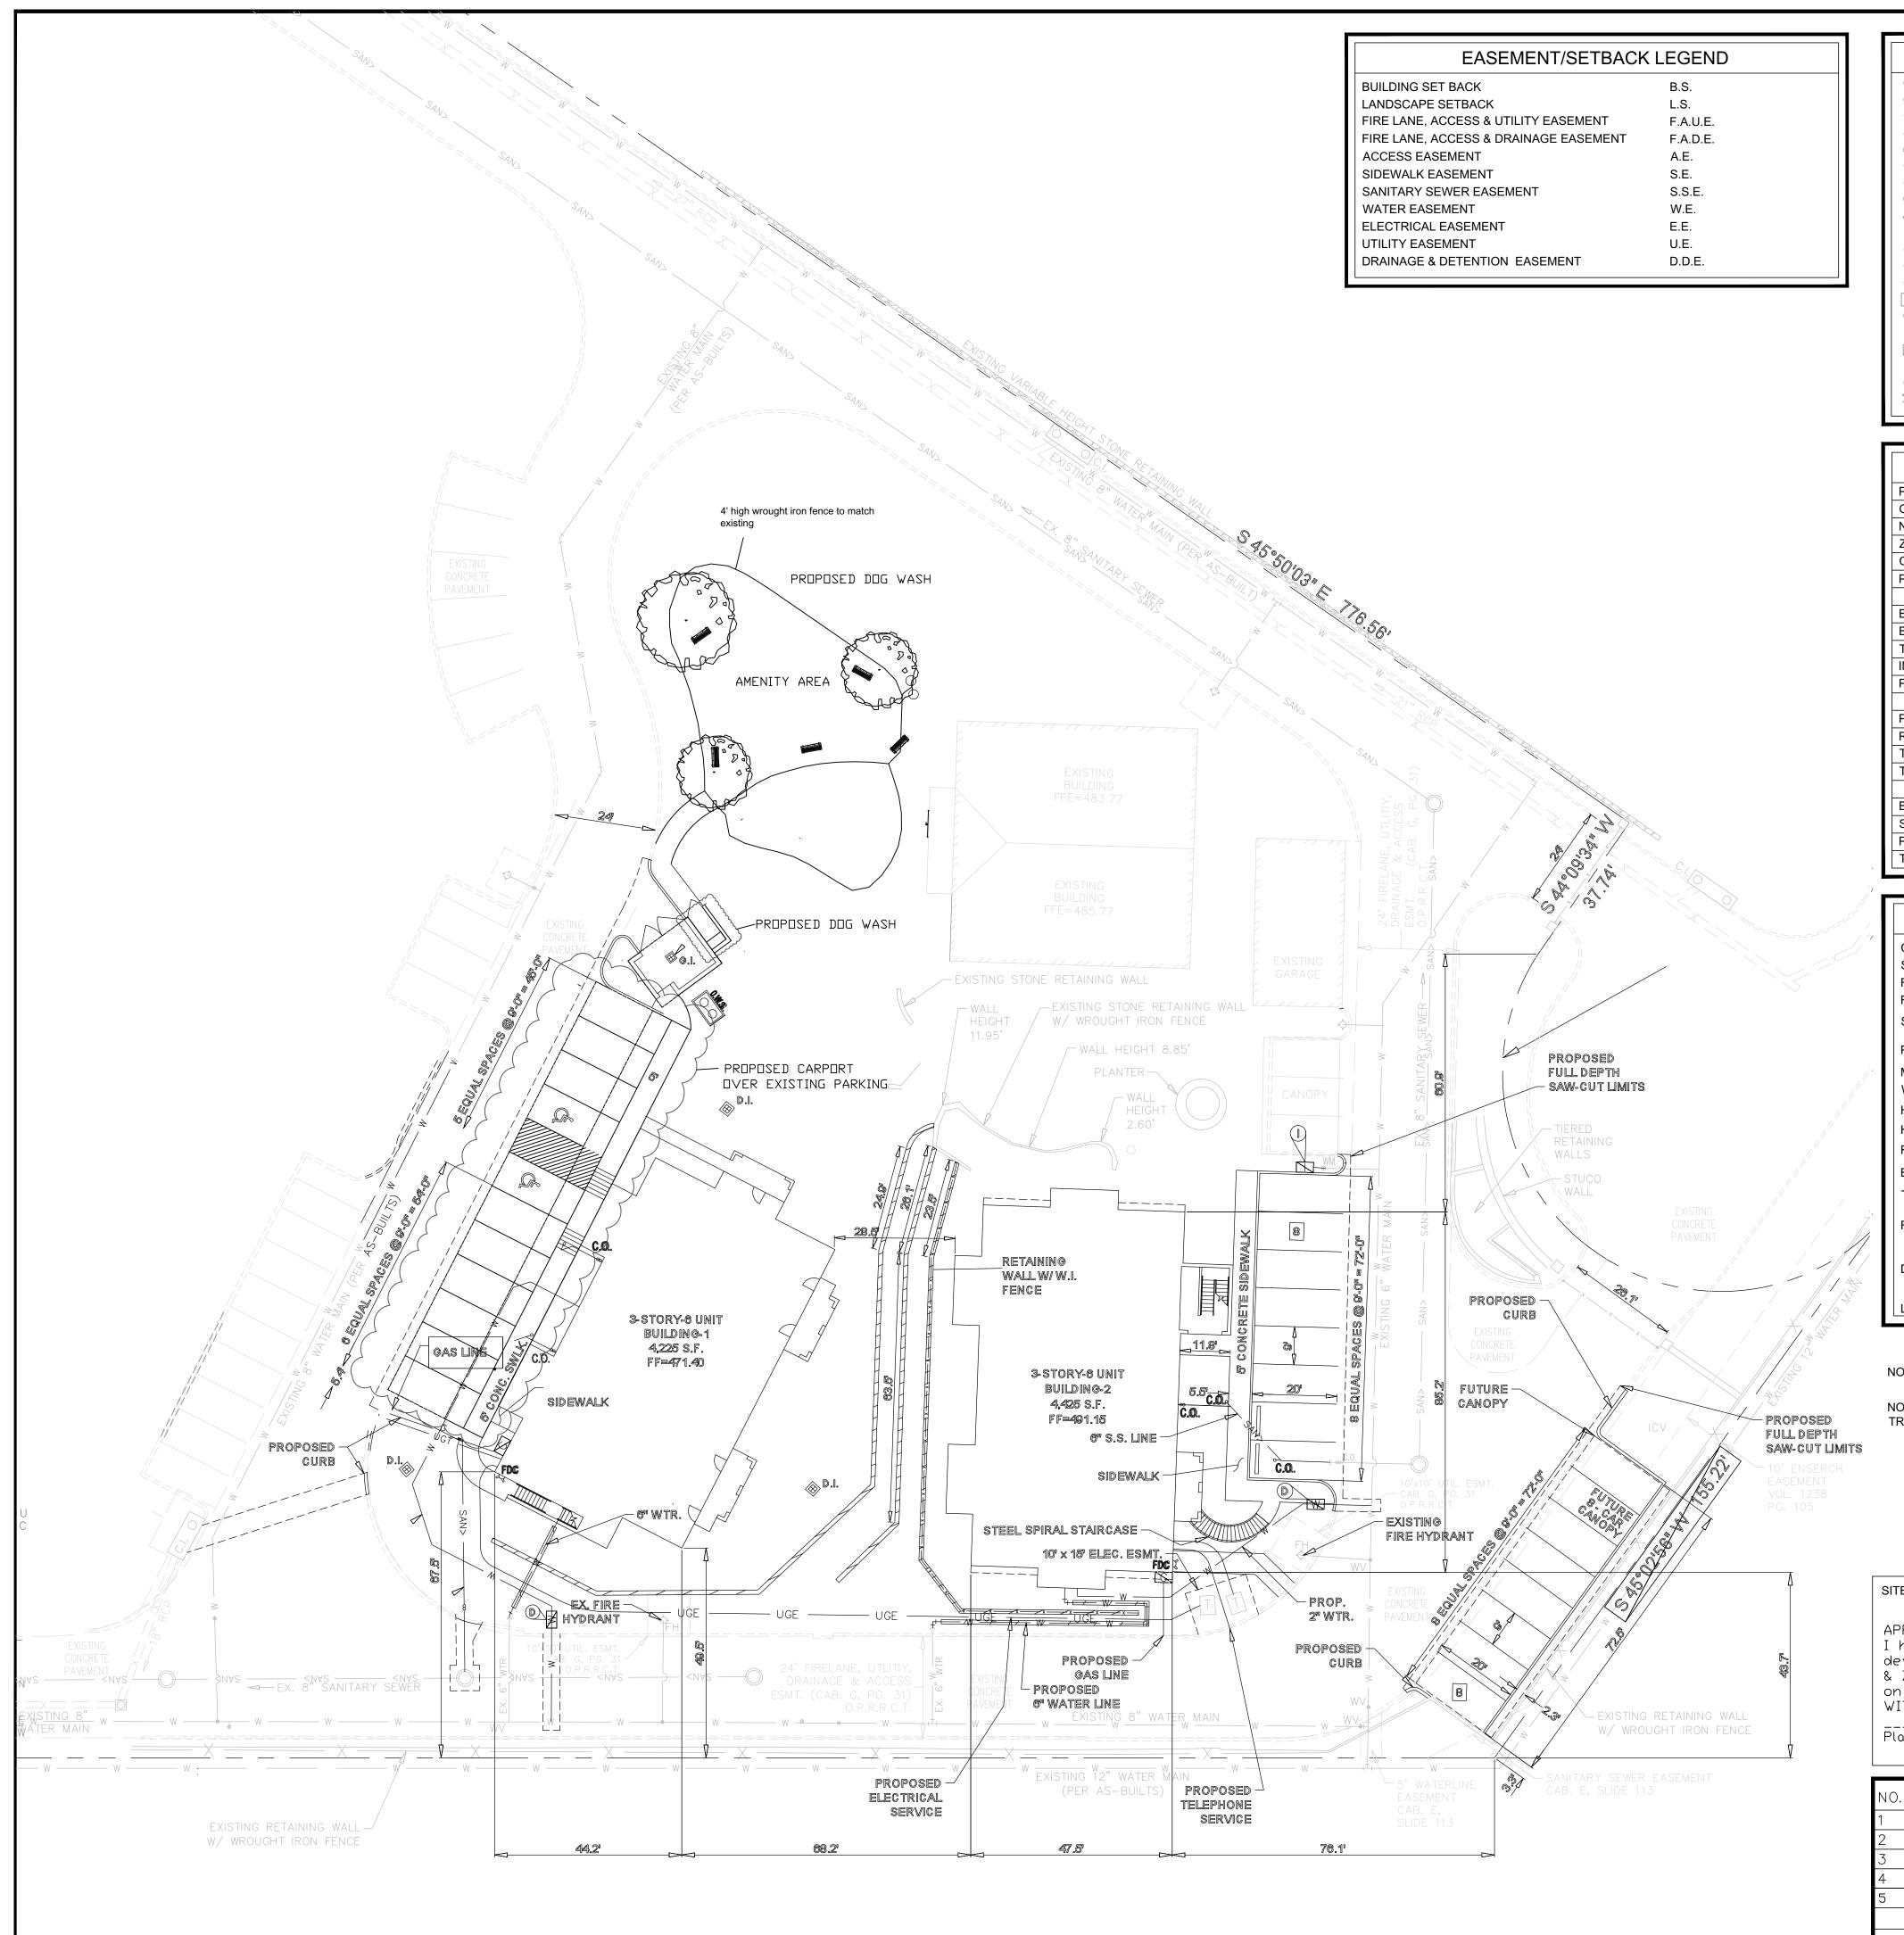

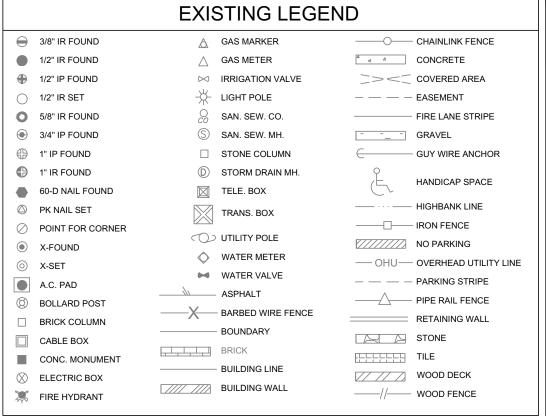

SITE DATA	A SUMMARY TABLE
PHYSICAL ADDRESS	PORTOFINO DRIVE
GROSS SITE AREA	287,476 S.F. / 6.60 ACRES
NET AREA	T.B.D.
ZONING	PD-22
CURRENT USE	CONDOMINIMUMS
PROPOSED USE	CONDOMINIMUMS
LOT	COVERAGE DATA
BUILDING COVERAGE	25,950 S.F.
BUILDING FOOTPRINT	8,650 S.F.
TOTAL BUILDING AREA	25,950 S.F.
IMPERVIOUS COVERAGE	6,946 S.F.
PERVIOUS COVERAGE	5,127 S.F.
PAR	RKING SUMMARY
PARKING SPACE REQUIREMENTS	
RESIDENTIAL PARKING - 2 SPACE	S PER UNIT
TOTAL PARKING SPACES REQUIR	RED = 24
TOTAL PARKING SPACES PROVID	PED = 27
В	UILDING DATA
BUILDINGS	2 BUILDINGS & 1 GARAGE
STORIES	3
PEAK HEIGHT	35'-0"
TOTAL SQUARE FOOTAGE	25,950 S.F.


	SITE LEGEND
CONCRETE CURB	
SAW-CUT LINE	
FENCE	X
FIRE LANE	
STRIPING	
PARKING SPACES	9
MONUMENT/PYLON SIGN	
WHEEL STOPS	
HANDICAP LOGO	
HANDICAP SIGN	
RAMP	00000 00000 00000
BOLLARD	•
TRAFFIC ARROW	→
FIRE HYDRANT	
DUMPSTER	
LIGHT POLE	

NOTE: PROPOSED BUILDING COLORS AND MATERIALS TO MATCH EXISTING BUILDINGS.

NOTE: TREES TO BE 5' AWAY FROM PUBLIC UTILITY LINES LESS THAN 10". TREES TO BE 10' AWAY FROM PUBLIC UTILITY LINES THAT ARE 10" OR GREATER.



20 40 Feet

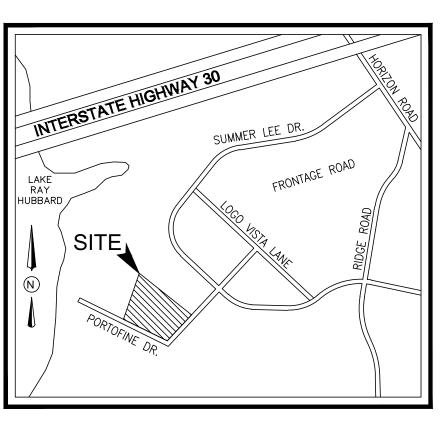

VICINITY MAP

GENERAL NOTES

- 1. ALL CONSTRUCTION SHALL BE IN STRICT ACCORDANCE WITH THE STANDARDS OF THE CITY OF ROCKWALL.
- 2. A PERMIT IS REQUIRED TO CUT A CITY STREET OR WORK WITHIN THE RIGHT-OF-WAY. THE PERMIT IS ISSUED BY THE PUBLIC WORKS DEPARTMENT.
- 3. THE LOCATION OF UNDERGROUND UTILITIES INDICATED ON THE PLANS IS TAKEN FROM PUBLIC RECORDS. IT IS THE CONTRACTOR'S RESPONSIBILITY TO MAKE ARRANGEMENTS WITH THE OWNERS OF SUCH UNDERGROUND UTILITIES PRIOR TO WORKING IN THE AREA TO CONFIRM THEIR EXACT LOCATION AND TO DETERMINE WHETHER ANY ADDITIONAL UTILITIES OTHER THAN THOSE SHOWN ON THE PLANS MAY BE PRESENT. THE CONTRACTOR SHALL PRESERVE AND PROTECT ALL UNDERGROUND UTILITIES. IF EXISTING UNDERGROUND UTILITIES ARE DAMAGED, THE CONTRACTOR WILL BE RESPONSIBLE FOR THE COST OF REPAIRING THE UTILITY.
- 4. WHERE EXISTING UTILITIES OR SERVICE LINES ARE CUT, BROKEN OR DAMAGED, THE CONTRACTOR SHALL REPLACE OR REPAIR THE UTILITIES OR SERVICE LINES WITH THE SAME TYPE OF ORIGINAL MATERIAL AND CONSTRUCTION, OR BETTER, UNLESS OTHERWISE SHOWN OR NOTED ON THE PLANS, AT HIS OWN COST AND EXPENSE. THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ENGINEER AT ONCE OF ANY CONFLICTS IN GRADES AND ALIGNMENT.
- 5. ALL EXCAVATIONS, TRENCHING AND SHORING OPERATIONS SHALL COMPLY WITH THE REQUIREMENTS OF THE U. S. DEPARTMENT OF LABOR, OSHA, "CONST. SAFETY AND HEALTH REGULATIONS.", VOL. 29, SUBPART P. PG. 128 137, AND ANY AMENDMENTS THERETO.
- 6. ADEQUATE MEASURES SHALL BE TAKEN TO PREVENT EROSION. IN THE EVENT THAT SIGNIFICANT EROSION OCCURS AS A RESULT OF CONSTRUCTION THE CONTRACTOR SHALL RESTORE THE ERODED AREA TO ORIGINAL CONDITION OR BETTER.
- 7. THE CONTRACTOR SHALL RESTORE ALL AREAS DISTURBED BY CONSTRUCTION TO ORIGINAL CONDITION OR BETTER. RESTORED AREAS INCLUDE, BUT ARE NOT LIMITED TO TRENCH BACKFILL, SIDE SLOPES, FENCES, CULVERT PIPES, DRAINAGE DITCHES, DRIVEWAYS, PRIVATE YARDS AND ROADWAYS.
- 8. ANY CHANGES NEEDED AFTER CONSTRUCTION PLANS HAVE BEEN RELEASED, SHALL BE APPROVED BY THE CITY ENGINEER. THESE CHANGES MUST BE RECEIVED IN WRITING FROM THE DESIGN ENGINEER. THE DIRECTOR OF PUBLIC WORKS SHALL APPROVE ANY DEVIATIONS FROM STATE REGULATIONS.
- 9. THE CONTRACTOR SHALL PROVIDE "RED LINED" MARKED PRINTS TO THE ENGINEER PRIOR TO FINAL INSPECTION INDICATING ALL CONSTRUCTION WHICH DEVIATED FROM THE PLANS OR WAS CONSTRUCTED IN ADDITION TO THAT INDICATED ON THE PLANS.

WATER METER & SANITARY SEWER SCHEDULE								
ID	TYPE	SIZE	NO.	SAN. SEW.				
D	DOM.	1 1/2"	2	6"				
	IRR.	1"	1	N/A				

SITE PLAN SIGNATURE BLOCK


APPROVED:

I hereby certify that the above and foregoing site plan for a development in the City of Rockwall, Texas, was approved by the Planning & Zoning Commission of the City of Rockwall on the ____ day of _____, ____.

WITNESS DUR HANDS, this ____ day of _____, ____.

Planning & Zoning Commission, Chairman Director of Planning and Zoning

DESCRIPTION	BY	
1st CITY SUBMITTAL	KP	
2nd CITY SUBMITTAL	KP	***
3rd CITY SUBMITTAL	KP	KARTAVYA S. PATEL
4th CITY SUBMITTAL	KP	况 97534 次
5th CITY SUBMITTAL	HK	CENSE
		MINIMAN ENGLA
		09/04/2020
	DESCRIPTION 1st CITY SUBMITTAL 2nd CITY SUBMITTAL 3rd CITY SUBMITTAL 4th CITY SUBMITTAL 5th CITY SUBMITTAL	1st CITY SUBMITTAL KP 2nd CITY SUBMITTAL KP 3rd CITY SUBMITTAL KP 4th CITY SUBMITTAL KP

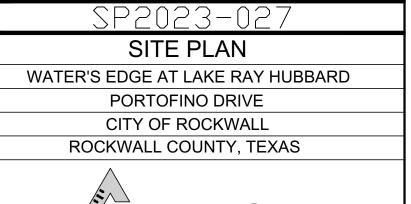



Plann	nina I	Civil Engir	neerina	Construction N	<i>M</i> anagement
	DRAWN		SCALE	PROJECT NO.	SHEET NO.
KP	MLM	11/7/2019	SEE SCALE BAR	040-19	2
		TX PE FII	RM #11525	5	3

_ Sheet metal canopy Mediterranean style to match existing cover for electrical supply and meter base

ELEVATION PLAN SIGNATURE BLOCK

I hereby certify that the above and foregoing site plan for a development in the City of Rockwall, Texas, was approved by the Planning & Zoning Commission of the City of Rockwall

Planning & Zoning Commission, Chairman Director of Planning and Zoning

on the ____ day of _____, ___.

WITNESS DUR HANDS, this ____ day of _____, ___.

- STONE WATER TABLE

STUCCO SILL

WEST ELEVATION

100% MASONRY 9% STONE 91% STUCCO

- STUCCO TO MATCH EXISTING

- 3. ANY DISCREPANCIES NOTED BY THE SUBCONTRACTOR SHALL BE BROUGHT TO THE ATTENTIONS OF THE ARCHITECT (IN WRITING) BEFORE BIDDING THIS PROJECT.
- 4. AFTER BIDS ARE TURNED IN, THE SUBCONTRACTOR SHALL COMPLETE THE SYSTEMS AT NO ADDITIONAL COST.
- 5. PLUMBING, MECHANICAL, AND ELECTRICAL SUBCONTRACTORS ARE RESPONSIBLE FOR COORDINATING ALL COMPONENTS TO INSURE COMPLETE AND WORKING SYSTEMS EACH SUBCONTRACTOR SHALL REVIEW ALL DRAWINGS FOR COMPLIANCE.
- 6. THE ARCHITECT WILL BE RESPONSIBLE TO DETERMINE WHICH TRADE SHALL PROVIDE AND INSTALL ANY COMPONENTS MISSED FOR WORKING SYSTEMS AS NEEDED.

A4

Scale:

Project No.: 190602

Designed: GW

Drawn: GW

Checked: WM

SHEET

3/16" = 1'-0"

04/21/2023

OWNER
PLUTUS 21 DEVELOPMENT

6116 N. CENTRAL EXPWY #700
DALLAS, TEXAS 75206

CASE #SP2020-000

© ©©PYRI©HT 2019 MERSHAWN ARCHITECTS, INC. no printing or coping is allowed without permission from mershawn.




SOUTH ELEVATION

100% MASONRY 10% STONE 90% STUCCO

APPROVED:

I hereby certify that the above and foregoing site plan for a development in the City of Rockwall, Texas, was approved by the Planning & Zoning Commission of the City of Rockwall

Planning & Zoning Commission, Chairman Director of Planning and Zoning

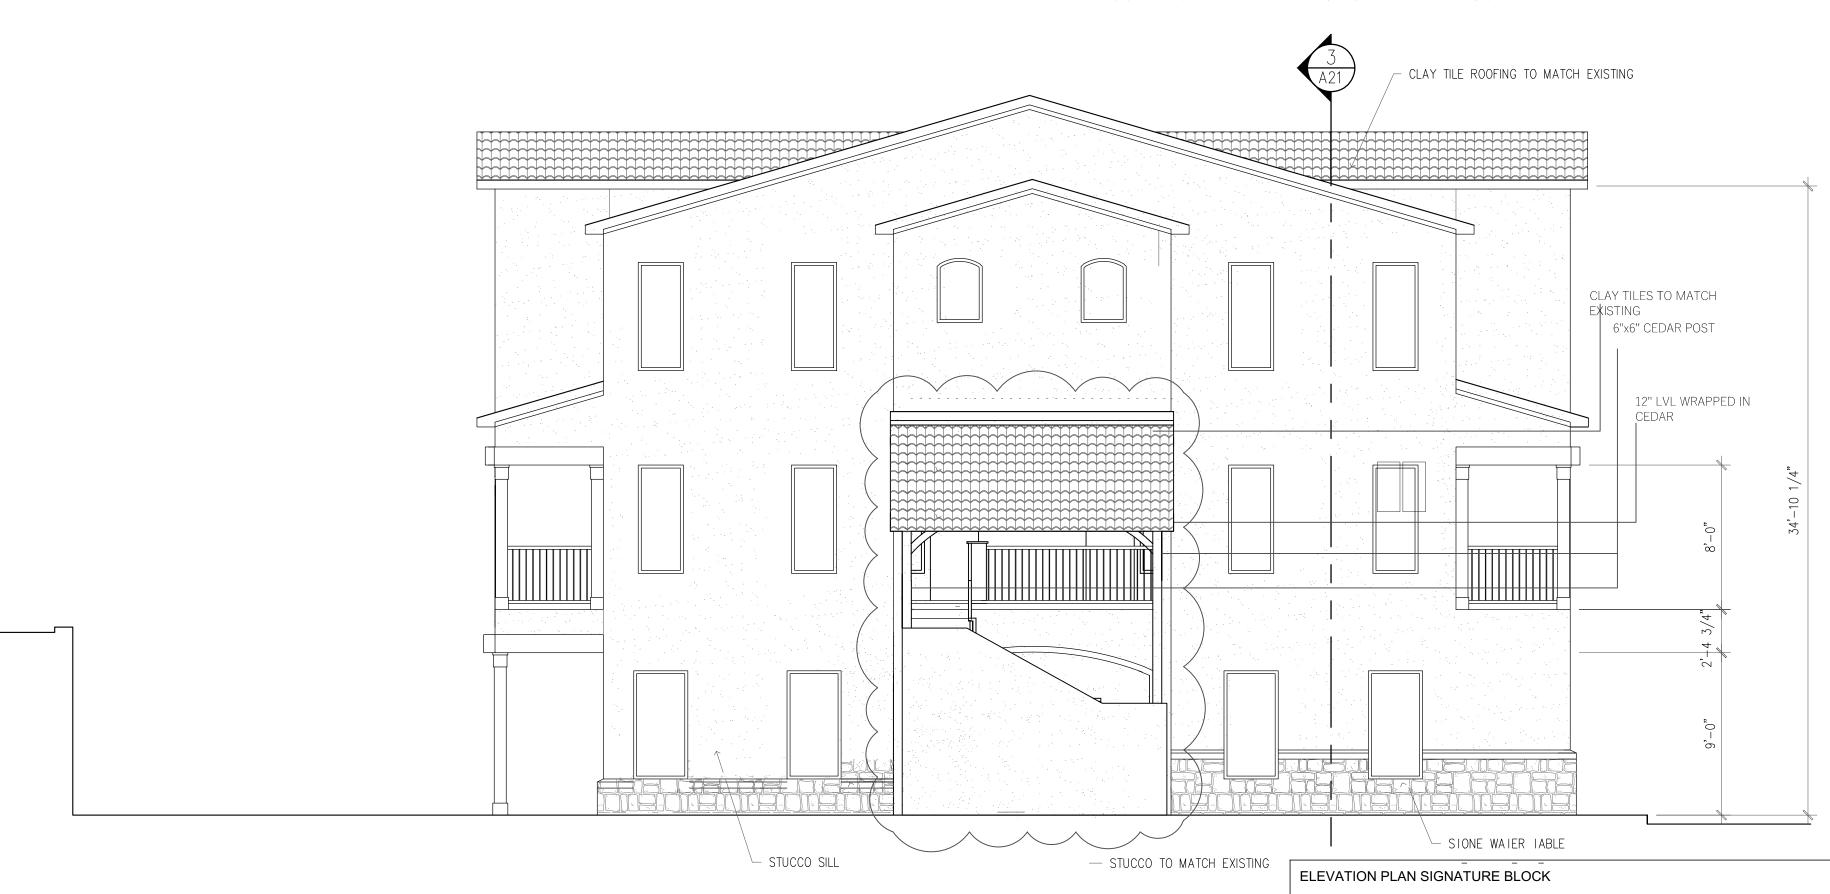

EAST ELEVATION

NOTE: ALL NEW BUILDING ELEVATIONS SHALL MATCH COLORS TO THE EXISTING SURROUNDING BUILDINGS. THIS BUILDING HAS SIX INDIVIDUAL LIVING UNITS.

6116 N. CENTRAL EXPWY #700 DALLAS, TEXAS 75206

CASE #SP2020-000

PLUTUS21 DEVELOPMENT


PRICING & CONSTRUCTION

- OR OTHER APPURTENANCE NECESSARY TO
- 3. ANY DISCREPANCIES NOTED BY THE SUBCONTRACTOR SHALL BE BROUGHT TO
- 4. AFTER BIDS ARE TURNED IN, THE SUBCONTRACTOR SHALL COMPLETE THE SYSTEMS AT NO ADDITIONAL COST.
- 5. PLUMBING, MECHANICAL, AND ELECTRICAL SUBCONTRACTORS ARE RESPONSIBLE FOR COORDINATING ALL COMPONENTS TO INSURE COMPLETE AND WORKING SYSTEMS EACH SUBCONTRACTOR SHALL REVIEW ALL
- 6. THE ARCHITECT WILL BE RESPONSIBLE TO DETERMINE WHICH TRADE SHALL PROVIDE AND INSTALL ANY COMPONENTS MISSED FOR WORKING SYSTEMS AS NEEDED.

© COPYRIGHT 2019 MERSHAWN ARCHITECTS, INC. NO PRINTING OR COPING IS ALLOWED WITHOUT PERMISSION FROM MERSHAWN.

GENERAL NOTES:

- THESE DRAWINGS ARE DIAGRAMMATIC IN NATURE AND ARE NOT INTENDED TO INDICATE EACH AND EVERY FITTING, OFFSET, COMPLETE THE SYSTEM.
- 2. IT IS THE SUBCONTRACTOR'S RESPONSIBILITY TO REVIEW THE DOCUMENTS AND INCLUDE ALL NECESSARY ITEMS TO PROVIDE A COMPLETE OPERATIONAL SYSTEM.
- THE ATTENTIONS OF THE ARCHITECT (IN WRITING) BEFORE BIDDING THIS PROJECT.
- DRAWINGS FOR COMPLIANCE.



TUS 21 LAKE RAY · 🚾 📺 i

3/16" = 1'-0"Scale: 04/21/2023 Project No.: 190602 Designed: GW Drawn: GW Checked: WM SHEET















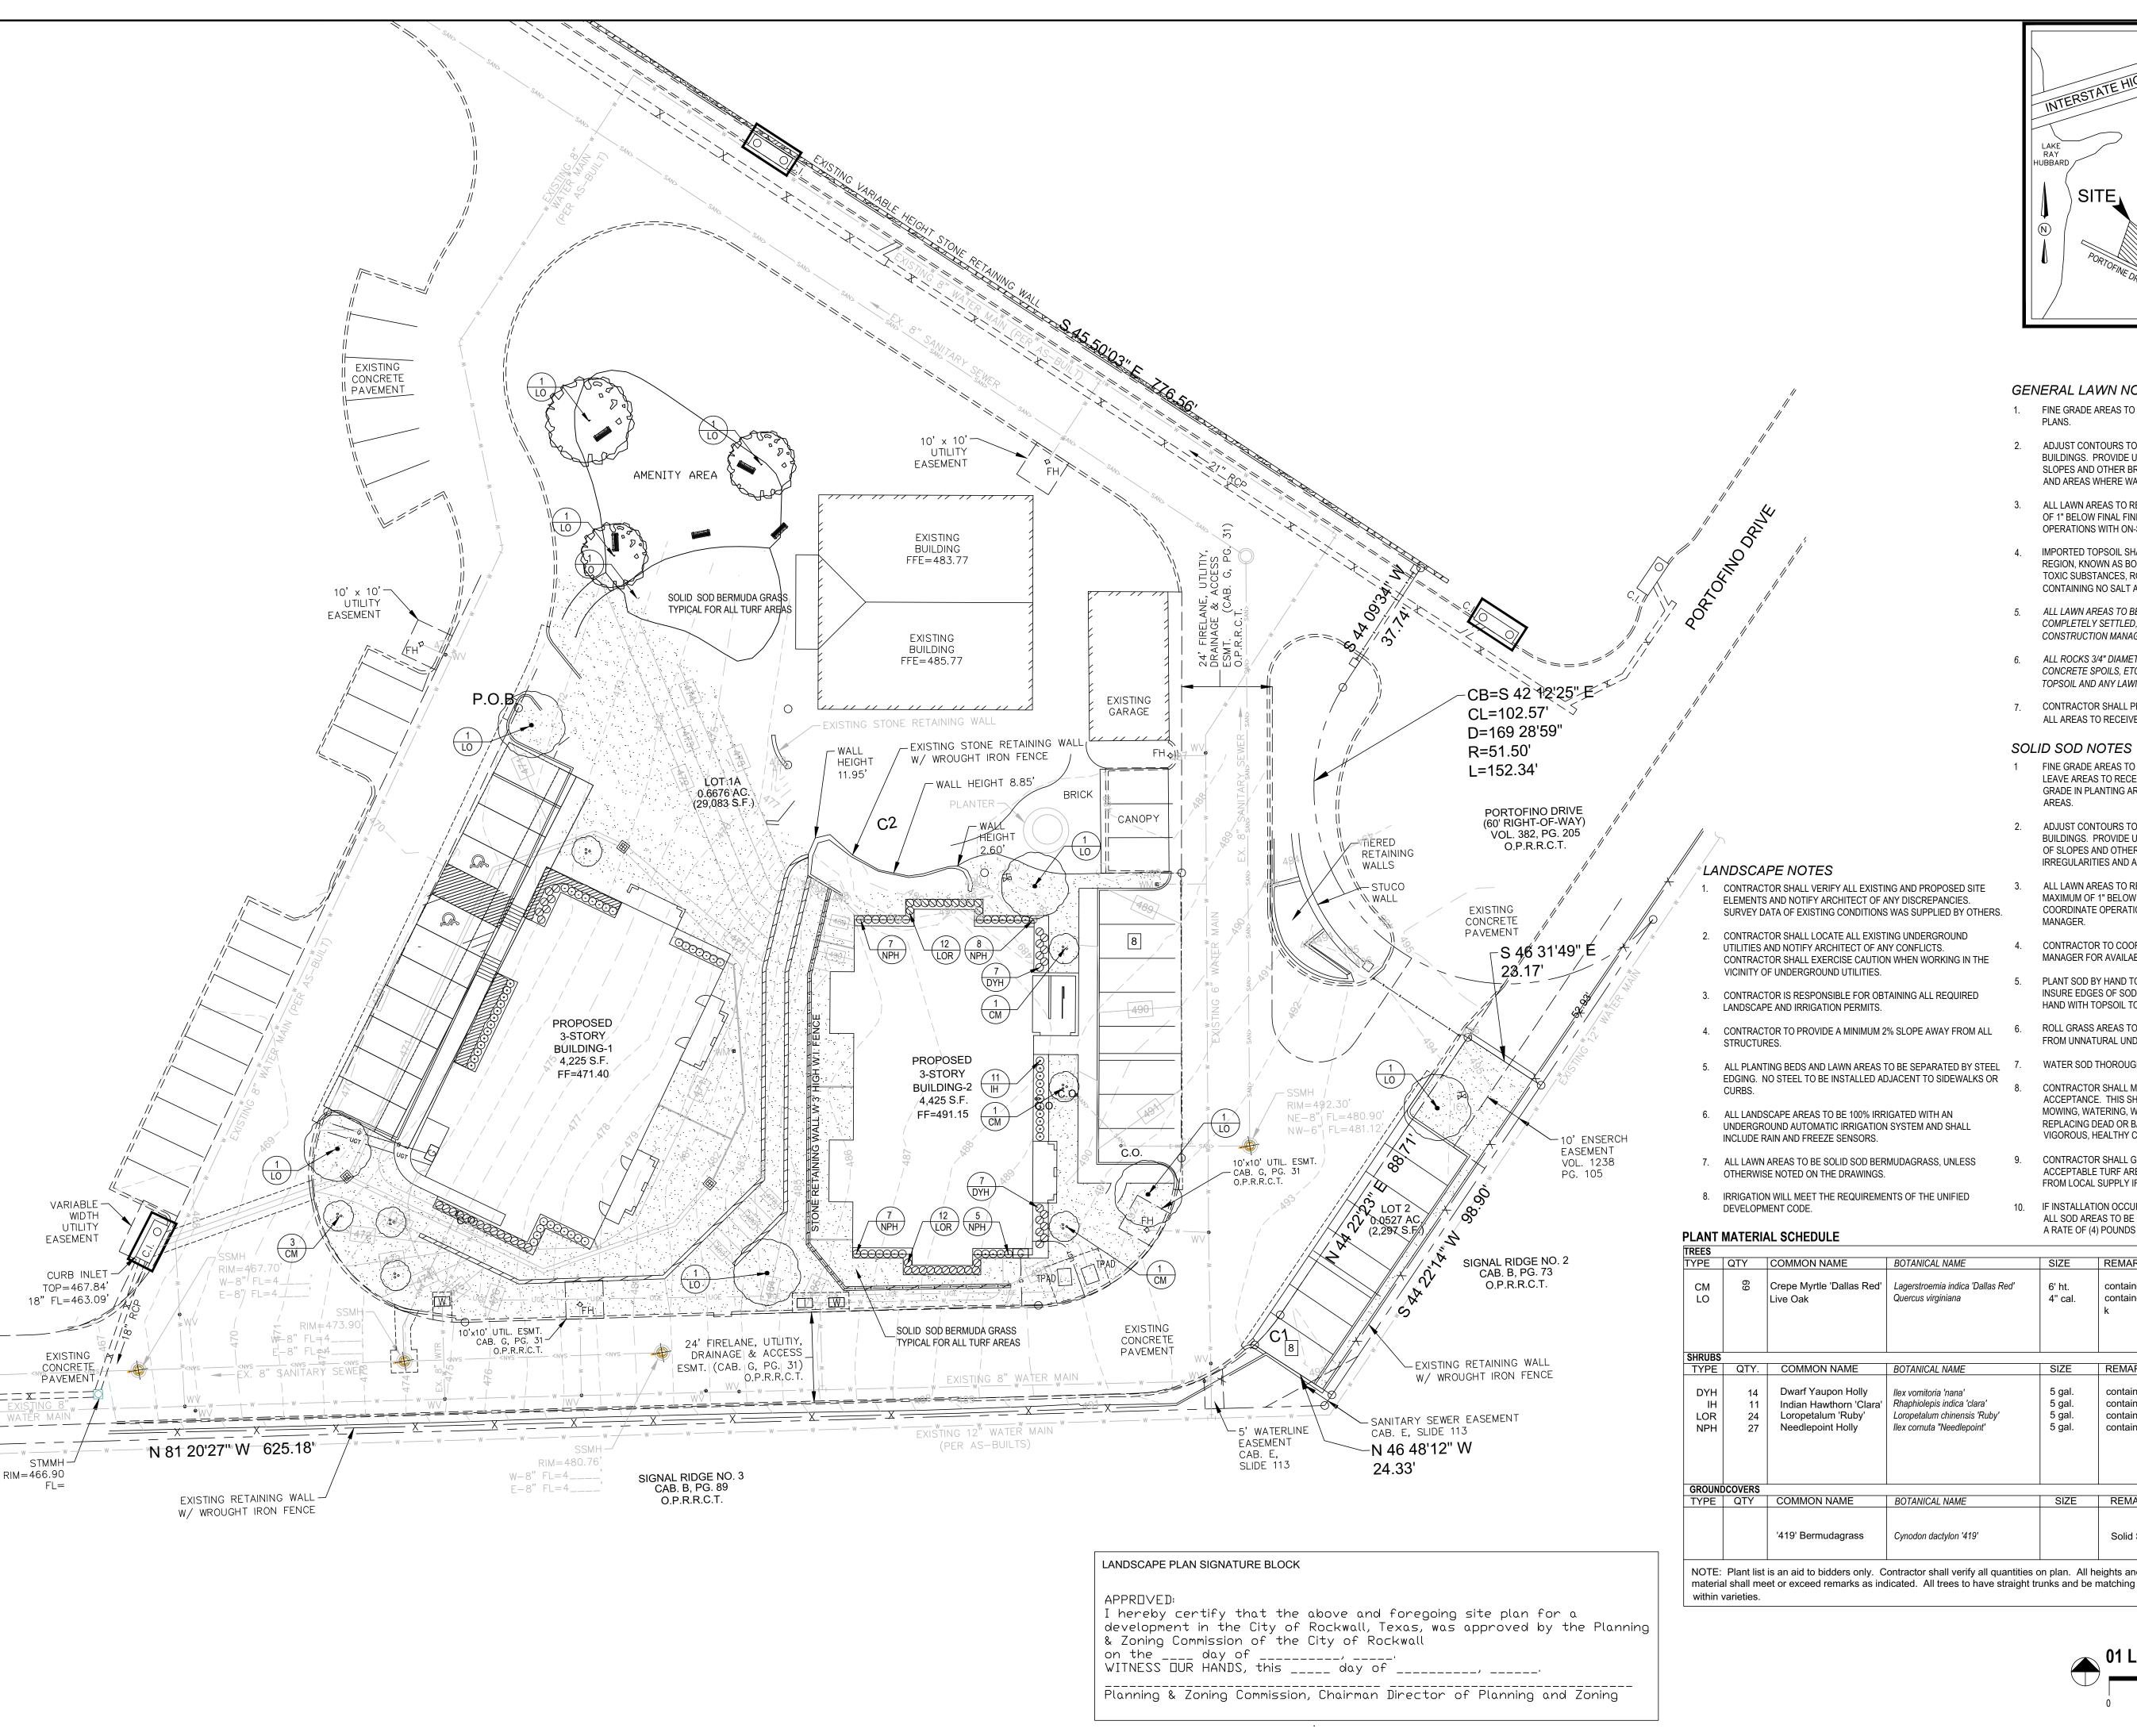

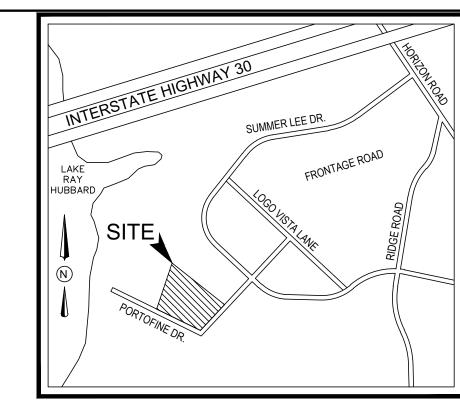

VICINITY MAP

GENERAL LAWN NOTES


- 1. FINE GRADE AREAS TO ACHIEVE FINAL CONTOURS INDICATED ON CIVIL
- ADJUST CONTOURS TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.
- 3. ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFT IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE. CONTRACTOR TO COORDINATE OPERATIONS WITH ON-SITE CONSTRUCTION MANAGER.
- IMPORTED TOPSOIL SHALL BE NATURAL, FRIABLE SOIL FROM THE REGION, KNOWN AS BOTTOM AND SOIL, FREE FROM LUMPS, CLAY, TOXIC SUBSTANCES, ROOTS, DEBRIS, VEGETATION, STONES, CONTAINING NO SALT AND BLACK TO BROWN IN COLOR.
- ALL LAWN AREAS TO BE FINE GRADED, IRRIGATION TRENCHES COMPLETELY SETTLED, AND FINISH GRADE APPROVED BY THE OWNER'S CONSTRUCTION MANAGER OR ARCHITECT PRIOR TO INSTALLATION.
- ALL ROCKS 3/4" DIAMETER AND LARGER, DIRT CLODS, STICKS, CONCRETE SPOILS, ETC. SHALL BE REMOVED PRIOR TO PLACING TOPSOIL AND ANY LAWN INSTALLATION
- CONTRACTOR SHALL PROVIDE (1") ONE INCH OF IMPORTED TOPSOIL ON ALL AREAS TO RECEIVE LAWN.

SOLID SOD NOTES

- FINE GRADE AREAS TO ACHIEVE FINAL CONTOURS INDICATED. LEAVE AREAS TO RECEIVE TOPSOIL 3" BELOW FINAL DESIRED GRADE IN PLANTING AREAS AND 1" BELOW FINAL GRADE IN TURF
- ADJUST CONTOURS TO ACHIEVE POSITIVE DRAINAGE AWAY FROM BUILDINGS. PROVIDE UNIFORM ROUNDING AT TOP AND BOTTOM OF SLOPES AND OTHER BREAKS IN GRADE. CORRECT IRREGULARITIES AND AREAS WHERE WATER MAY STAND.
- ALL LAWN AREAS TO RECEIVE SOLID SOD SHALL BE LEFT IN A MAXIMUM OF 1" BELOW FINAL FINISH GRADE. CONTRACTOR TO COORDINATE OPERATIONS WITH ON-SITE CONSTRUCTION
- CONTRACTOR TO COORDINATE WITH ON-SITE CONSTRUCTION MANAGER FOR AVAILABILITY OF EXISTING TOPSOIL.
- PLANT SOD BY HAND TO COVER INDICATED AREA COMPLETELY. INSURE EDGES OF SOD ARE TOUCHING. TOP DRESS JOINTS BY HAND WITH TOPSOIL TO FILL VOIDS.
 - ROLL GRASS AREAS TO ACHIEVE A SMOOTH, EVEN SURFACE, FREE FROM UNNATURAL UNDULATIONS.
- WATER SOD THOROUGHLY AS SOD OPERATION PROGRESSES.
- CONTRACTOR SHALL MAINTAIN ALL LAWN AREAS UNTIL FINAL ACCEPTANCE. THIS SHALL INCLUDE, BUT NOT LIMITED TO: MOWING, WATERING, WEEDING, CULTIVATING, CLEANING AND REPLACING DEAD OR BARE AREAS TO KEEP PLANTS IN A VIGOROUS, HEALTHY CONDITION.
- CONTRACTOR SHALL GUARANTEE ESTABLISHMENT OF AN ACCEPTABLE TURF AREA AND SHALL PROVIDE REPLACEMENT FROM LOCAL SUPPLY IF NECESSARY.
- IF INSTALLATION OCCURS BETWEEN SEPTEMBER 1 AND MARCH 1, ALL SOD AREAS TO BE OVER-SEEDED WITH WINTER RYEGRASS, AT A RATE OF (4) POUNDS PER ONE THOUSAND (1000) SQUARE FEET.

NT	MATERIAL	SCHEDULE

TYPE	QTY	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
CM LO	69	Crepe Myrtle 'Dallas Red' Live Oak	Lagerstroemia indica 'Dallas Red' Quercus virginiana	6' ht. 4" cal.	container, 3 or 5 trunks, 4' spread min.,tree f container, 13' ht., 5' spread, 5' clear straight k
SHRUBS					
TYPE	QTY.	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
DYH IH LOR NPH	14 11 24 27	Dwarf Yaupon Holly Indian Hawthorn 'Clara' Loropetalum 'Ruby' Needlepoint Holly	llex vomitoria 'nana' Rhaphiolepis indica 'clara' Loropetalum chinensis 'Ruby' llex cornuta "Needlepoint'	5 gal. 5 gal. 5 gal. 5 gal.	container, 18" ht., 18" spread container, 20" ht., 20" spread container, 20" ht., 20" spread container , 24" ht., 20" spread
GROUNI	DCOVERS				1
TYPE	QTY	COMMON NAME	BOTANICAL NAME	SIZE	REMARKS
		'419' Bermudagrass	Cynodon dactylon '419'		Solid Sod refer to notes



LANDSCAPE ARCHITECT STUDIO GREEN SPOT, INC 1784 W. McDERMOTT DR. SUITE 110 ALLEN, TEXAS 75013 (469) 369-4448 CHRIS@STUDIOGREENSPOT



$\mathbf{\Omega}$ $\mathbf{\Omega}$ AKE GE ED

S

'ATER'

DRIVE TEXAS

SP2023-02

DATE: 11.21.2019

SHEET NAME: LANDSCAPE PLAN

SHEET NUMBER:

SECTION 02900 - LANDSCAPE

PART 1 - GENERAL

REFERENCED DOCUMENTS

Refer to bidding requirements, special provisions, and schedules for additional requirements.

DESCRIPTION OF WORK

Work included: Furnish all supervision, labor, materials, services, equipment and appliances required to complete the work covered in conjunction with the landscaping covered in these specifications and landscaping plans, including:

- Planting (trees, shrubs, and grass)
- Bed preparation and fertilization Notification of sources
- Water and Maintenance until final acceptance Guarantee

REFERENCE STANDARDS

ART 3 - EXECUTION

C. Grass Areas:

INSTALLATION

materials.

BED PREPARATION & FERTILIZATION

All planting areas shall be conditioned as follows:

batter board against the bed areas.

- American Standard for Nursery Stock published by American Association of Nurserymen. 27 October 1980, Edition; by American National Standards Institute, Inc. (Z60.1) – plant
- American Joint Committee on Horticultural Nomenclature: 1942 Edition of Standardized
- Texas Association of Nurserymen, Grades and Standards.
- Hortis Third, 1976 Cornell University

NOTIFICATION OF SOURCES AND SUBMITTALS

- The Contractor shall, within ten (10) days following acceptance of bid, notify the Architect/Owner of the sources of plant materials and bed preparation required for the
- Samples: Provide representative quantities of sandy loam soil, mulch, bed mix material, gravel, and crushed stone. Samples shall be approved by Architect before use on
- Product Data: Submit complete product data and specifications on all other specified
- Submit three representative samples of each variety of ornamental trees, shrubs, and groundcover plants for Architect's approval. When approved, tag, install, and maintain as representative samples for final installed plant materials.
- File Certificates of Inspection of plant material by state, county, and federal authorities with Architect, if required
- F. Soil Analysis: Provide sandy loam soil analysis if requested by the Architect.

Landscape Contractor to inspect all existing conditions and report any deficiencies to the

Prepare new planting beds by scraping away existing grass and weeds as necessary.

Till existing soil to a depth of six (6") inches prior to placing compost and fertilizer.

compost and till into a depth of six (6") inches of the topsoil. Apply organic fertilizer

such as Sustane or Green Sense at the rate of twenty (20) pounds per one thousand

Apply fertilizer as per manufacturers recommendations. Add six (6") inches of

3. Backfill for tree pits shall be as follows: Use existing top soil on site (use imported

1. Areas to be Solid Sod Bermudagrass: Blocks of sod should be laid joint to joint,

topsoil where they are evidently gaped open, then watered thoroughly.

(staggered joints) after fertilizing the ground first. Roll grass areas to achieve a smooth, even surface. The joints between the blocks of sod should be filled with

2. Areas to be Hydromulch Common Bermudagrass: Hydromulch with bermudagrass

Maintenance of plant materials shall begin immediately after each plant is delivered to the

Plant materials shall be delivered to the site only after the beds are prepared and area

ready for planting. All shipments of nursery materials shall be thoroughly protected from

the drying winds during transit. All plants which cannot be planted at once, after delivery

to the site, shall be well protected against the possibility of drying by wind and sun. Balls

of earth of B & B plants shall be kept covered with soil or other acceptable material. All

Notify the Landscape Architect for inspection and approval of all positioning of plant

Excavate pits with vertical sides and horizontal bottom. Tree pits shall be large enough to

permit handling and planting without injury to balls of earth or roots and shall be of such

depth that, when planted and settled, the crown of the plant shall bear the same

relationship to the finish grade as it did to soil surface in original place of growth.

plants remain the property of the Contractor until final acceptance.

Position the trees and shrubs in their intended location as per plan

site and shall continue until all construction has been satisfactorily accomplished.

seed at a rate of two (2) pounds per one thousand (1,000) square feet. Use a 4' x 8'

topsoil as needed) free from large clumps, rocks, debris, caliche, subsoils, etc.,

All planting areas shall receive a two (2") inch layer of specified mulch.

placed in nine (9") inch layers and watered in thoroughly.

JOB CONDITIONS

- General Contractor to complete the following punch list: Prior to Landscape Contractor initiating any portion of landscape installation, General Contractor shall leave planting bed areas three (3") inches below finish grade of sidewalks, drives and curbs as shown on the drawings. All lawn areas to receive solid sod shall be left one (1") inch below the finish grade of sidewalks, drives, and curbs. All construction debris shall be removed prior to Landscape Contractor beginning any work.
- B. General Contractor shall provide topsoil as described in Section 02200 Earthwork.
- Storage of materials and equipment at the job site will be at the risk of the Landscape Contractor. The Owner cannot be held responsible for theft or damage.

MAINTENANCE AND GUARANTEE

Maintenance:

- 1. The Landscape Contractor will be held responsible for the maintenance of all work from the time of planting until final acceptance by the Owner. No trees, shrubs, groundcover or grass will be accepted unless they show a healthy growth and satisfactory foliage conditions.
- Maintenance shall include watering of trees and plants, cultivation, weeding spraying, edging, pruning of trees, mowing of grass, cleaning up and all other work necessary of maintenance.
- 3. A written notice requesting final inspection and acceptance should be submitted to the Owner at least seven (7) days prior to completion. An on-site inspection by
- Owner and Landscape Contractor will be completed prior to written acceptance. 4. After final acceptance of installation, the Landscape Contractor will not be required to do any of the above listed work.

B. Guarantee:

- 1. Trees shall be guaranteed for a twelve (12) month period after acceptance. Shrubs and groundcover shall be guaranteed for twelve (12) months. The Contractor shall replace all dead materials as soon as weather permits and upon notification of the Owner. Plants, including trees, which have partially died so that shape, size, or symmetry has been damaged, shall be considered subject to replacement. In such
- cases, the opinion of the Owner shall be final. a. Plants used for replacement shall be of the same size and kind as those originally planted and shall be planted as originally specified. All work, including materials, labor and equipment used in replacements, shall carry a twelve (12) month guarantee. Any damage, including ruts in lawn or bed areas, incurred as a result of making replacements shall be immediately
- b. At the direction of the Owner, plants may be replaced at the start of the next year's planting season. In such cases, dead plants shall be removed from the
- premises immediately. c. When plant replacements are made, plants, soil mix, fertilizer and mulch are to be utilized as originally specified and reinspected for full compliance with Contract requirements. All replacements are to be included under "Work" of this section.

Shrub and tree pits shall be no less than two (2') feet, twenty-four (24") inches, wider than

the lateral dimension of earth ball and six (6") inches deeper than it's vertical dimension.

Remove and haul from site all rocks and stones over one (1") inch in diameter. Plants

Dig a wide, rough sided hole exactly the same depth as the height of the ball, especially a

Percolation Test: Fill the hole with water. If the water level does not percolate within 24

Backfill only with 5 parts existing soil or sandy loam and 1 part bed preparation. When

the hole is dug in solid rock, topsoil from the same area should not be used. Carefully

as well as all nylon, plastic string and wire mesh. Container trees will usually be pot

settle by watering to prevent air pockets. Remove the burlap from the top 1/3 of the ball,

Mulch the top of the ball. Do not plant grass all the way to the trunk of the tree. Leave the

area above the top of the ball and mulch with at least two (2") inches of specified mulch.

All plant beds and trees to be mulched with a minimum settled thickness of two (2")

stand pipe per tree planting detail as approved by the Landscape Architect

bound, if so follow standard nursery practice of 'root scoring'.

hours, the tree needs to move to another location or have drainage added. Install a PVC

the surface of the ground. The sides of the hole should be rough and jagged, never slick

should be thoroughly moist before removing containers.

- 2. The Owner agrees that for the guarantee to be effective, he will water plants at least twice a week during dry periods and cultivate beds once a month after final
- 3. The above guarantee shall not apply where plants die after acceptance because of injury from storms, hail, freeze, insects, diseases, injury by humans, machines or
- 4. Acceptance for all landscape work shall be given after final inspection by the Owner provided the job is in a completed, undamaged condition, and there is a stand of grass in all lawn areas. At this time, the Owner will assume maintenance on the accepted work.
- Repairs: Any necessary repairs under the Guarantee must be made within ten (10) days after receiving notice, weather permitting, and in the event the Landscape Contractor does not make repairs accordingly, the Owner, without further notice to Contractor, may provide materials and men to make such repairs at the expense of the Landscape

QUALITY ASSURANCE

- General: Comply with applicable Federal, State, County and Local regulations governing landscape materials and work
- Personnel: Employ only experienced personnel who are familiar with the required work. Provide full time supervision by a qualified foreman acceptable to Landscape Architect.
- Selection of Plant Material:
- 1. Make contact with suppliers immediately upon obtaining notice of contract acceptance to select and book materials. Develop a program of maintenance (pruning and fertilization) which will insure the purchased materials will meet and/or exceed project specifications
- 2. Landscape Architect will provide a key identifying each tree location on site. Written verification will be required to document material selection, source and delivery schedules to site.
- 3. Owner and/or Architect shall inspect all plant materials when reasonable at place of growth for compliance with requirements for genus, species, cultivar/variety, size and 4. Owner and/or Architect retains the right to further inspect all plant material upon arrival at the site and during installation for size and condition of root balls, limbs,
- branching habit, insects, injuries, and latent defects. 5. Owner and/or Architect may reject unsatisfactory or defective material at any time during the process of work. Remove rejected materials from the site immediately. Plants damaged in transit or at job site shall be rejected.

PRODUCT DELIVERY, STORAGE AND HANDLING

- Balled and Burlapped (B&B) Plants: Dig and prepare shipment in a manner that will not damage roots, branches, shape, and future development. 2. Container Grown Plants: Deliver plants in rigid container to hold ball shape and

- 1. Deliver packaged materials in sealed containers showing weight, analysis and name of manufacturer. Protect materials from deterioration during delivery and while stored
- 2. Deliver only plant materials that can be planted in one day unless adequate storage and watering facilities are available on job site.
- 3. Protect root balls by heeling in with sawdust or other approved moisture retaining material if not planted within 24 hours of delivery.
- 4. Protect plants during delivery to prevent damage to root balls or desiccation of leaves. Keep plants moist at all times. Cover all materials during transport.
- 5. Notify Architect of delivery schedule 72 hours in advance so plant material may be observed upon arrival at job site. 6. Remove rejected plant material immediately from site.
- 7. To avoid damage or stress, do not lift, move, adjust to plumb, or otherwise manipulate plants by trunk or stems.

PART 2 - PRODUCTS

2.1 PLANTS

- General: Well-formed No. 1 grade or better nursery grown stock. Listed plant heights are from tops of root balls to nominal tops of plants. Plant spread refers to nominal outer width of the plant, not to the outer leaf tips. Plants will be individually approved by the Architect and his decision as to their acceptability shall be final.
- Quantities: The drawings and specifications are complimentary. Anything called for on one and not the other is as binding as if shown and called for on both. The plant schedule is an aid to bidders only. Confirm all quantities on plan.
- C. Quality and size: Plant materials shall conform to the size given on the plan, and shall be healthy, symmetrical, well-shaped, full branched, and well rooted. The plants shall be free from injurious insects, diseases, injuries to the bark or roots, broken branches, objectionable disfigurements, insect eggs and larvae and are to be of specimen quality
- Approval: All plant materials shall be subject to the approval of the Owner. All plants which are found unsuitable in growth, or in any unhealthy, badly shaped, or undersized condition, will be rejected by the Landscape Architect, either before or after planting, and shall be removed at the expense of the Landscape Contractor and replaced with acceptable plants as specified.
- Trees shall be healthy, full-branched, well-shaped and shall meet the trunk diameter and height requirements of the plant schedule. Balls shall be firm, neat, slightly tapered, and well wrapped in burlap. Any tree loose in the ball or with broken ball at time of planting will be rejected. Balls shall be ten (10") inched in diameter for each one (1") inch of trunk diameter, Measured six (6") inched above ball. Nomenclature conforms to the customary nursery usage: for clarification, the term "multi-trunk" defines a plant having three (3) or more trunks of nearly equal diameter
- Pruning: All pruning of trees and shrubs, as directed by the Landscape Architect, shall be executed by the Landscape Contractor at no additional cost to the Owner

A = ROW SPACING

B = ON CENTER SPACING

SPACE PLANTS IN A TRIANGULAR

FROM EACHOTHER AT SPACING

PLANTING GROUNDCOVER/ANNUALS.

PREPARE GROUNDCOVER

BED BY TILLING ENTIRE BED-

AREA. PROVIDE SOIL MIX

AS DEFINED IN THE LANDSCAPE

INDICATED ON PLANT LIST

MULCH IN BED PRIOR TO

EDGE OF BED

2.2 SOIL PREPARATION MATERIALS


- A. Sandy Loam:
 - 1. Friable, fertile, dark, loamy soil, free of clay lumps, subsoil, stones and other extraneous material and reasonably free of weeds and foreign grasses. Loam
 - containing Dallasgrass or Nutgrass shall be rejected. 2. Physical properties as follows: Clay - between 7-27 percent
 - Silt between 15-25 percent Sand – less than 52 percent


Earth Technologies or approved equal.


- Organic matter shall be 3%-10% of total dry weight. 4. If requested, provide a certified soil analysis conducted by an approved soil testing laboratory verifying that sandy loam meets the above requirements.
- Organic Material: Compost with a mixture of 80% vegetative matter and 20% animal
- waste. Ingredients should be a mix of course and fine textured material.
- Premixed Bedding Soil as supplied by Vital Earth Resources, Gladewater, Texas; Professional Bedding Soil as supplied by Living Earth Technology, Dallas, Texas or Acid
- Gro Municipal Mix as supplied by Soil Building Systems, Dallas, Texas or approved equal. D. Sharp Sand: Sharp sand must be free of seeds, soil particles and weeds.
- Mulch: Double Shredded Hardwood Mulch, partially decomposed, dark brown. Living
- Organic Fertilizer: Fertilaid, Sustane, or Green Sense or equal as recommended for required applications. Fertilizer shall be delivered to the site in original unopened
- containers, each bearing the manufacturer's guaranteed statement of analysis. Commercial Fertilizer: 10-20-10 or similar analysis. Nitrogen source to be a minimum
- 50% slow release organic Nitrogen (SCU or UF) with a minimum 8% sulphur and 4% iron, plus micronutrients.
- B. Peat: Commercial sphagnum peat moss or partially decomposed shredded pine bark or other approved organic material.

MISCELLANEOUS MATERIALS

- A. Steel Edging: Shall be Ryerson "Estate Curbing", 1/8" x 4" with stakes 4' on center.
- B. Staking Material for Shade Trees:
 - 1. Post: Studded T-Post, #1 Armco with anchor plate; 6'-0" length; paint green. 2. Wire: 12 gauge, single strand, galvanized wire. 3. Rubber hose: 2 ply, fiber reinforced hose, minimum ½ inch inside diameter. Color:
- Gravel: Washed native pea gravel, graded 1 in. to 1-1/2 in.
- Filter Fabric: Mirafi 140N by Celanese Fibers Marketing Company, available at Loftland Co., (214) 631-5250 or approved equal.

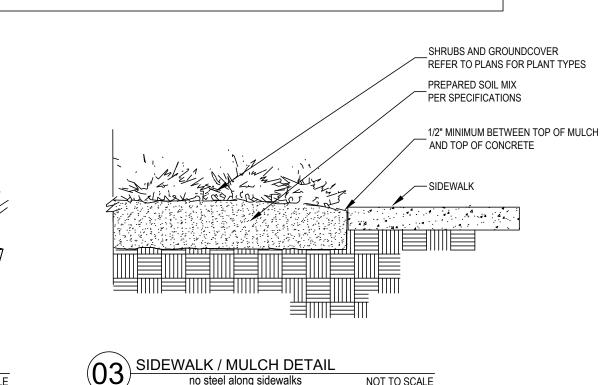

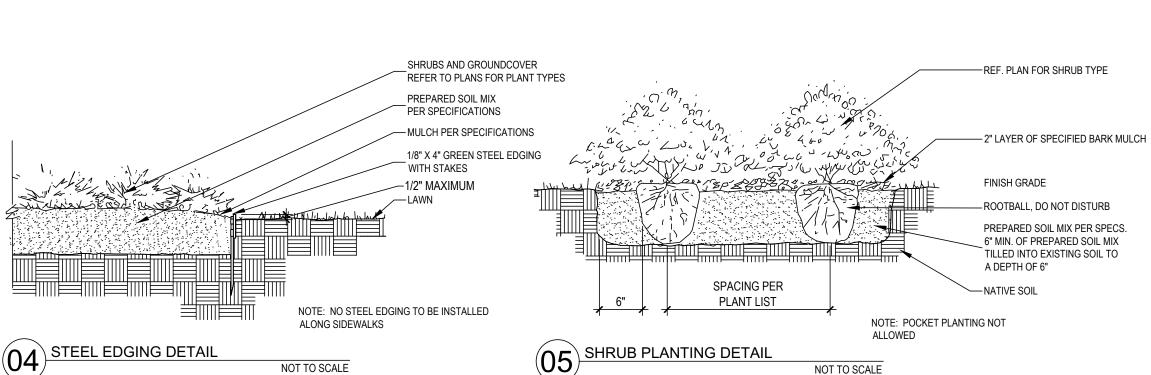

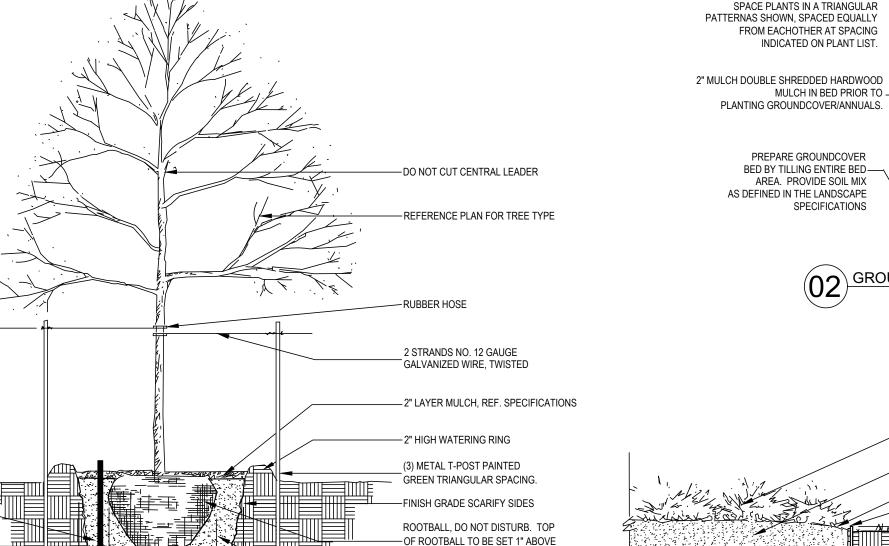

EXISTING GRADE. REMOVE TOP 1/3 BURLAP.

-NATIVE SOIL, REF. SPECIFICATIONS


NOTE: LOCATE STAKES OUTSIDE

OF TREE WELL. POSITION STAKES

TO SECURE TREE AGAINST SEASONAL

-CRUSHED ROCK

PREVAILING WINDS.

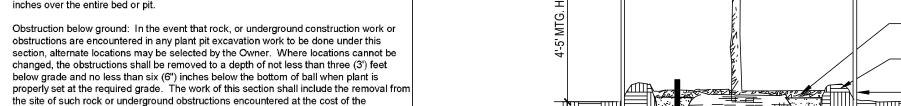

4" DIA. PERFORATED

PVC PIPE W/ CAP -

PAINTED BLACK

- Trees and large shrubs shall be staked as site conditions require. Position stakes to
- Pruning and Mulching: Pruning shall be directed by the Architect and shall be pruned in accordance with standard horticultural practice following Fine Pruning, Class I pruning standards provided by National Arborist Association.
- 1. Dead wood or suckers and broken badly bruised branches shall be removed. General tipping of the branched is not permitted. Do not cut terminal branches. Pruning shall be done with clean, sharp tools.
- Immediately after planting operations are completed, all tree pits shall be covered with a layer of organic material two (2") inches in depth. This limit of the organic material
- Steel Curbing Installation: 1. Curbing shall be aligned as indicated on plans. Stake out limits of steel curbing and
- obtain Owners approval prior to installation. All steel curbing shall be free of kinks and abrupt bends.
- Top of curbing shall be 3/4" maximum height above grade. . Stakes are to be installed on the planting bed side of the curbing, as opposed to the
- Do not install steel edging along sidewalks. 3. Cut steel edging at 45 degree angle where edging meets sidewalk.

CLEANUP AND ACCEPTANCE

J. Do not wrap trees.

K. Do not over prune.

Landscape Contractor.

secure tree against seasonal prevailing winds.

Cleanup: During the work, the premises shall be kept neat and orderly at all times. Storage areas for all materials shall be so organized that they, too, are neat and orderly. All trash and debris shall be removed from the site as work progresses. Keep paved areas clean by sweeping or hosing at end of each days work.

END OF SECTION

TREE PLANTING DETAIL NOT TO SCALE

OF ROOTBALL

LANDSCAPE SPECIFICATIONS SIGNATURE BLOCK

I hereby certify that the above and foregoing site plan for a development in the City of Rockwall, Texas, was approved by the Planning & Zoning Commission of the City of Rockwall on the ___ day of ____, ___, WITNESS DUR HANDS, this ____ day of ____,

Planning & Zoning Commission, Chairman Director of Planning and Zoning

LANDSCAPE ARCHITECT STUDIO GREEN SPOT, INC 1784 W. McDERMOTT DR. SUITE 110 ALLEN, TEXAS 75013 (469) 369-4448 CHRIS@STUDIOGREENSPOT.



4 $\mathbf{\Omega}$ $\mathbf{\omega}$ 5 AKE 4 **5** Ш 'ATER'

DRIVI

O O

11.21.2019

SHEET NAME: LANDSCAPE SPECIFICATIONS

SHEET NUMBER

<u>Luminaire</u> Symbol	Туре	Qty	Manufacturer / Catalog Number	Total Lumen Output	Total Input Watts	Ballast Factor	Light Lost Factor	User Defined Facto
+	W	12	LITHONIA WDGE2 LED P3 40K 80CRI VW VOLTAGE MOUNTING FINISH	3214	22.55	1.000	0.808	1.000
O		6	LUXRITE LED Canopy Light LED 28W 3CCT 3000K	3360	28		0.70	1.000

Calculation Summary								
Calculation Grid Location	Calc. Height (Ft.)	Units	Avg	Max	Min	Avg/Min	Illuminance (Fc)	Illum
GRADE_Planar	0	Fc	0.53	2.9	0.0	N.A.	Average = 0.83	Avei
PARKING1		Fc	0.83	1.4	0.1	8.30	Maximum = 1.4	Max
PARKING2		Fc	0.90	1.4	0.3	3.00	Minimum = 0.1 Avg/Min Ratio = 8.30	Minir Avg/
		'	·		'		Max/Min Ratio = 14 00	Mov

Illuminance (Fc)	
Average = 0.83	
Maximum = 1.4	
Minimum = 0.1	
Avg/Min Ratio = 8.30	
Max/Min Ratio = 14.00	

ARKING2 ıminance (Fc) /erage = 0.90 aximum = 1.4 nimum = 0.3 /g/Min Ratio = 3.00 Max/Min Ratio = 4.67

LIGHTING PLAN SIGNATURE BLOCK

APPROVED:

I hereby certify that the above and foregoing site plan for a development in the City of Rockwall, Texas, was approved by the Planning & Zoning Commission of the City of Rockwall

on the ___ day of ____, ___.

WITNESS DUR HANDS, this ____ day of ____, ___.

Planning & Zoning Commission, Chairman Director of Planning and Zoning

Elements

LED Technical Data

LED Canopy Lights

This product family can be effectively used in outdoor ceiling mount locations. Commercial, industrial, retail and healthcare exterior lighting; Parking garages, awnings, canopies, security lighting, etc.

Construction Cast aluminum housing Durable powdercoat Prismatic polycarbonate lens


Electrical

Wet location and IP65 rated Mounts directly to junction box System rated for long 50,000 hour life 150 or 250W HID Equivalent.

Operating temperature: -4 to 133 F

Clear polycarbonate prismatic lens Evenly spaced array of discrete LEDs

Delivers bright, white light and excellent uniformity



Five year limited warranty against UL and cUL listed

defects in manufacturing.

DLC v4.3 Standard


For the most up-to-date specs and warranty information, please visit www.tcpi.com Approximate Luminaire Weight: 5.3 lbs

CP4500140	LED Canopy Light 45W Non-Dim 40₭s	5,350	45	119	120 - 277	> 0.9	4000K	> 80	50,000	9.56
CP4500150	LED Canopy Light 45W Non-Dim 5/0⊮s	5,350	45	119	120 - 277	> 0.9	5000K	> 80	50,000	9.56
CP7000140	LED Canopy Light 70W Non-Dim 40₭s	7,600	70	109	120 - 277	> 0.9	4000K	> 80	50,000	9.56
CP7000150	LED Canopy Light 70W Non-Dim 50€s	7,600	70	109	120 - 277	> 0.9	5000K	> 80	50,000	9.56




325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcpi.com

we know light.™

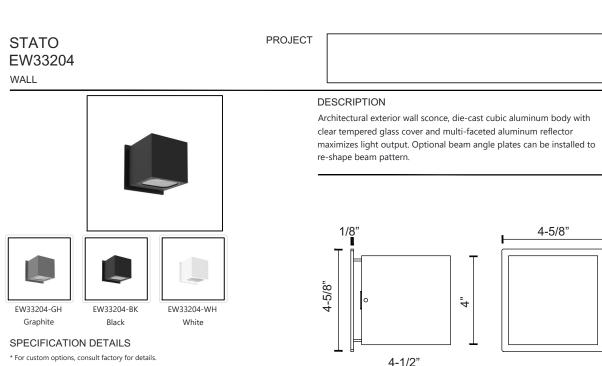


Fixture Dimensions	W4" x H4" E4-1/2"
Light Source	LED with DC Driver
Wattage	15W
Total Lumens	1575lm
Delivered Lumens	BK-840lm
Voltage	120-277V
Color Temperature	3000K
CRI (Ra)	80CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	Non-Dimming
Diffuser Details	Parabolic Aluminum Reflector
Glass Details	Clear Glass
Location	Wet, IP65
Compliance	IP65
Warranty	5 Years
Illumination Direction	Up and Down




COMMENT SURREY - BC V3Z 6M3 WWW.KUZCOLIGHTING.COM



Scale: 08/31/2023 Project No.: Designed: GW Drawn: GW



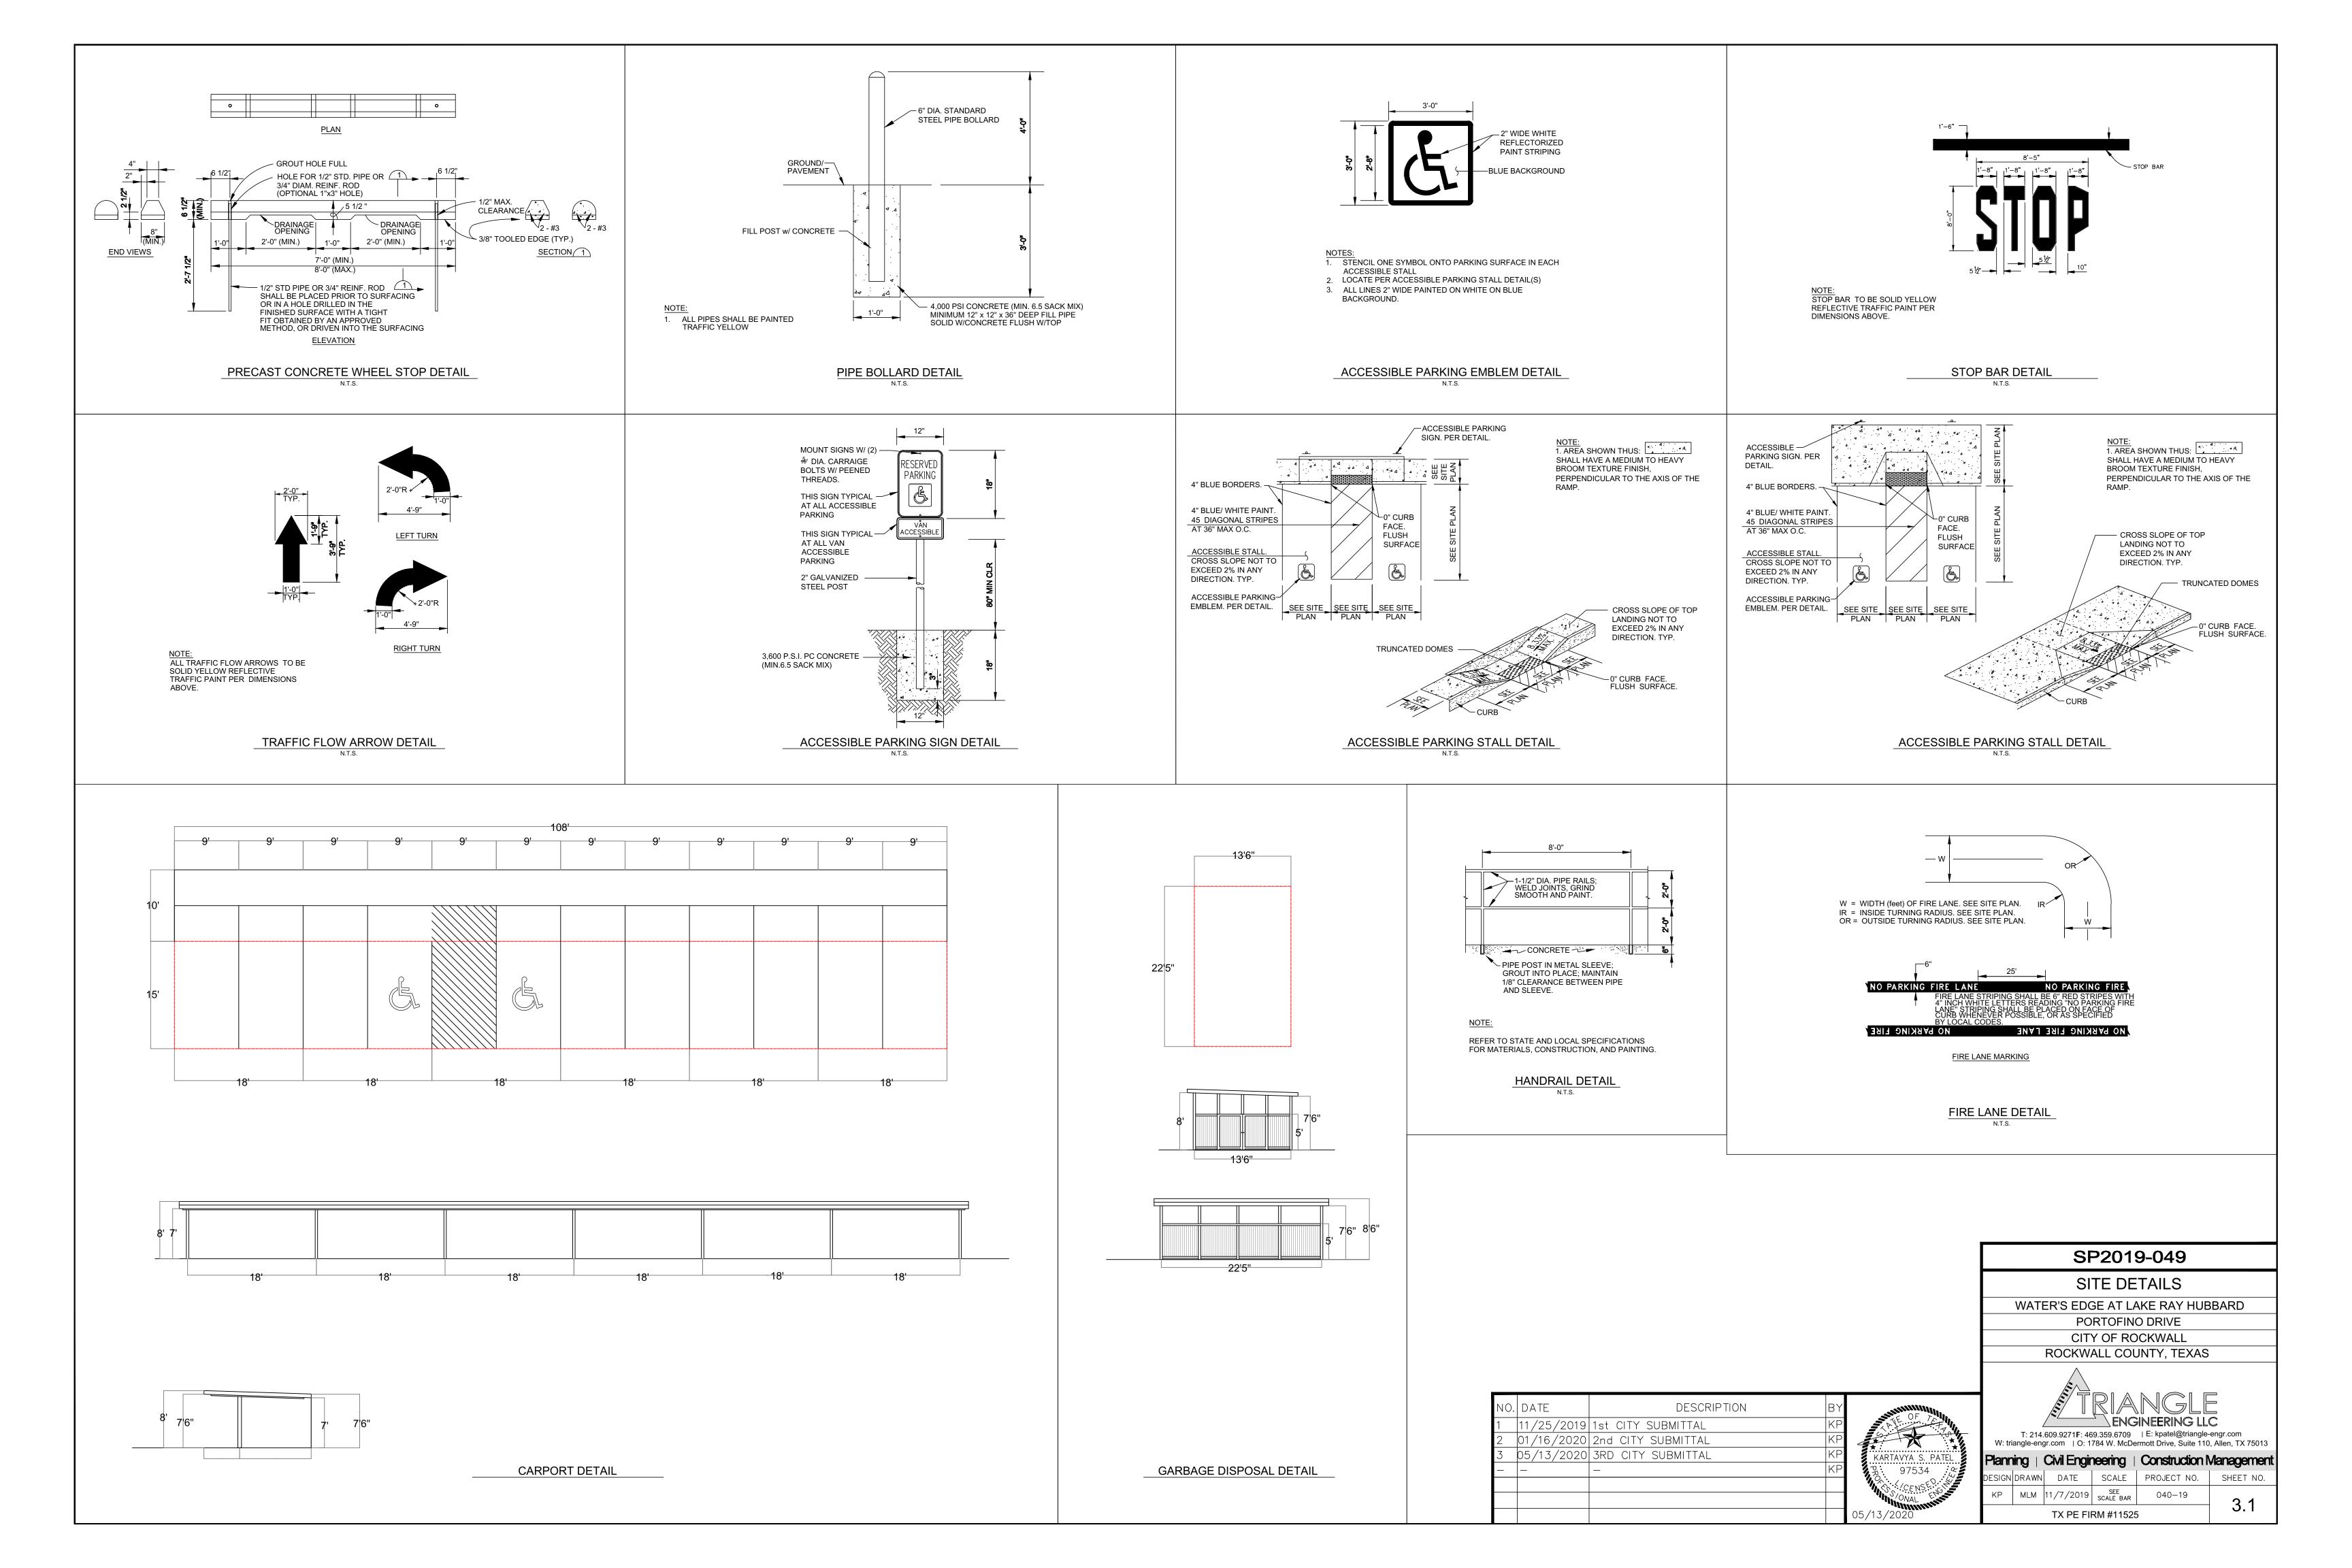



September 19, 2023

TO: Daniyal Anan

Plutus 21 Development V

11455 Newkirk Street, Suite 1405

Dallas, TX 75229

FROM: Henry Lee, AICP

City of Rockwall Planning and Zoning Department

385 S. Goliad Street Rockwall, TX 75087

SUBJECT: SP2023-027; Amended Site Plan for 2000-2038 Portifino Circle

Daniyal Anan:

This letter serves to notify you that the above referenced case (*i.e.* Site Plan) that you submitted for consideration by the City of Rockwall was approved by the Planning and Zoning Commission on September 12, 2023. The following is a record of all recommendations, voting records and conditions of approval:

Staff Recommendations

- (1) All staff comments provided by the Planning, Engineering and Fire Department must be addressed prior to the submittal of engineering plans; and,
- (2) Any construction resulting from the approval of this <u>Site Plan</u> shall conform to the requirements set forth by the Unified Development Code (UDC), the International Building Code (IBC), the Rockwall Municipal Code of Ordinances, city adopted engineering and fire codes and with all other applicable regulatory requirements administered and/or enforced by the state and federal government.

Planning and Zoning Commission

On September 12, 2023, the Planning and Zoning Commission approved a motion to approve the Site Plan by a vote of 6-0 with Commissioner Womble absent.

Should you have any guestions or concerns regarding your zoning case, please feel free to contact me a (972) 772-6434.

Sincerely

Henry Lee, AICP, Senior Planner

City of Rockwall Planning and Zoning Department