
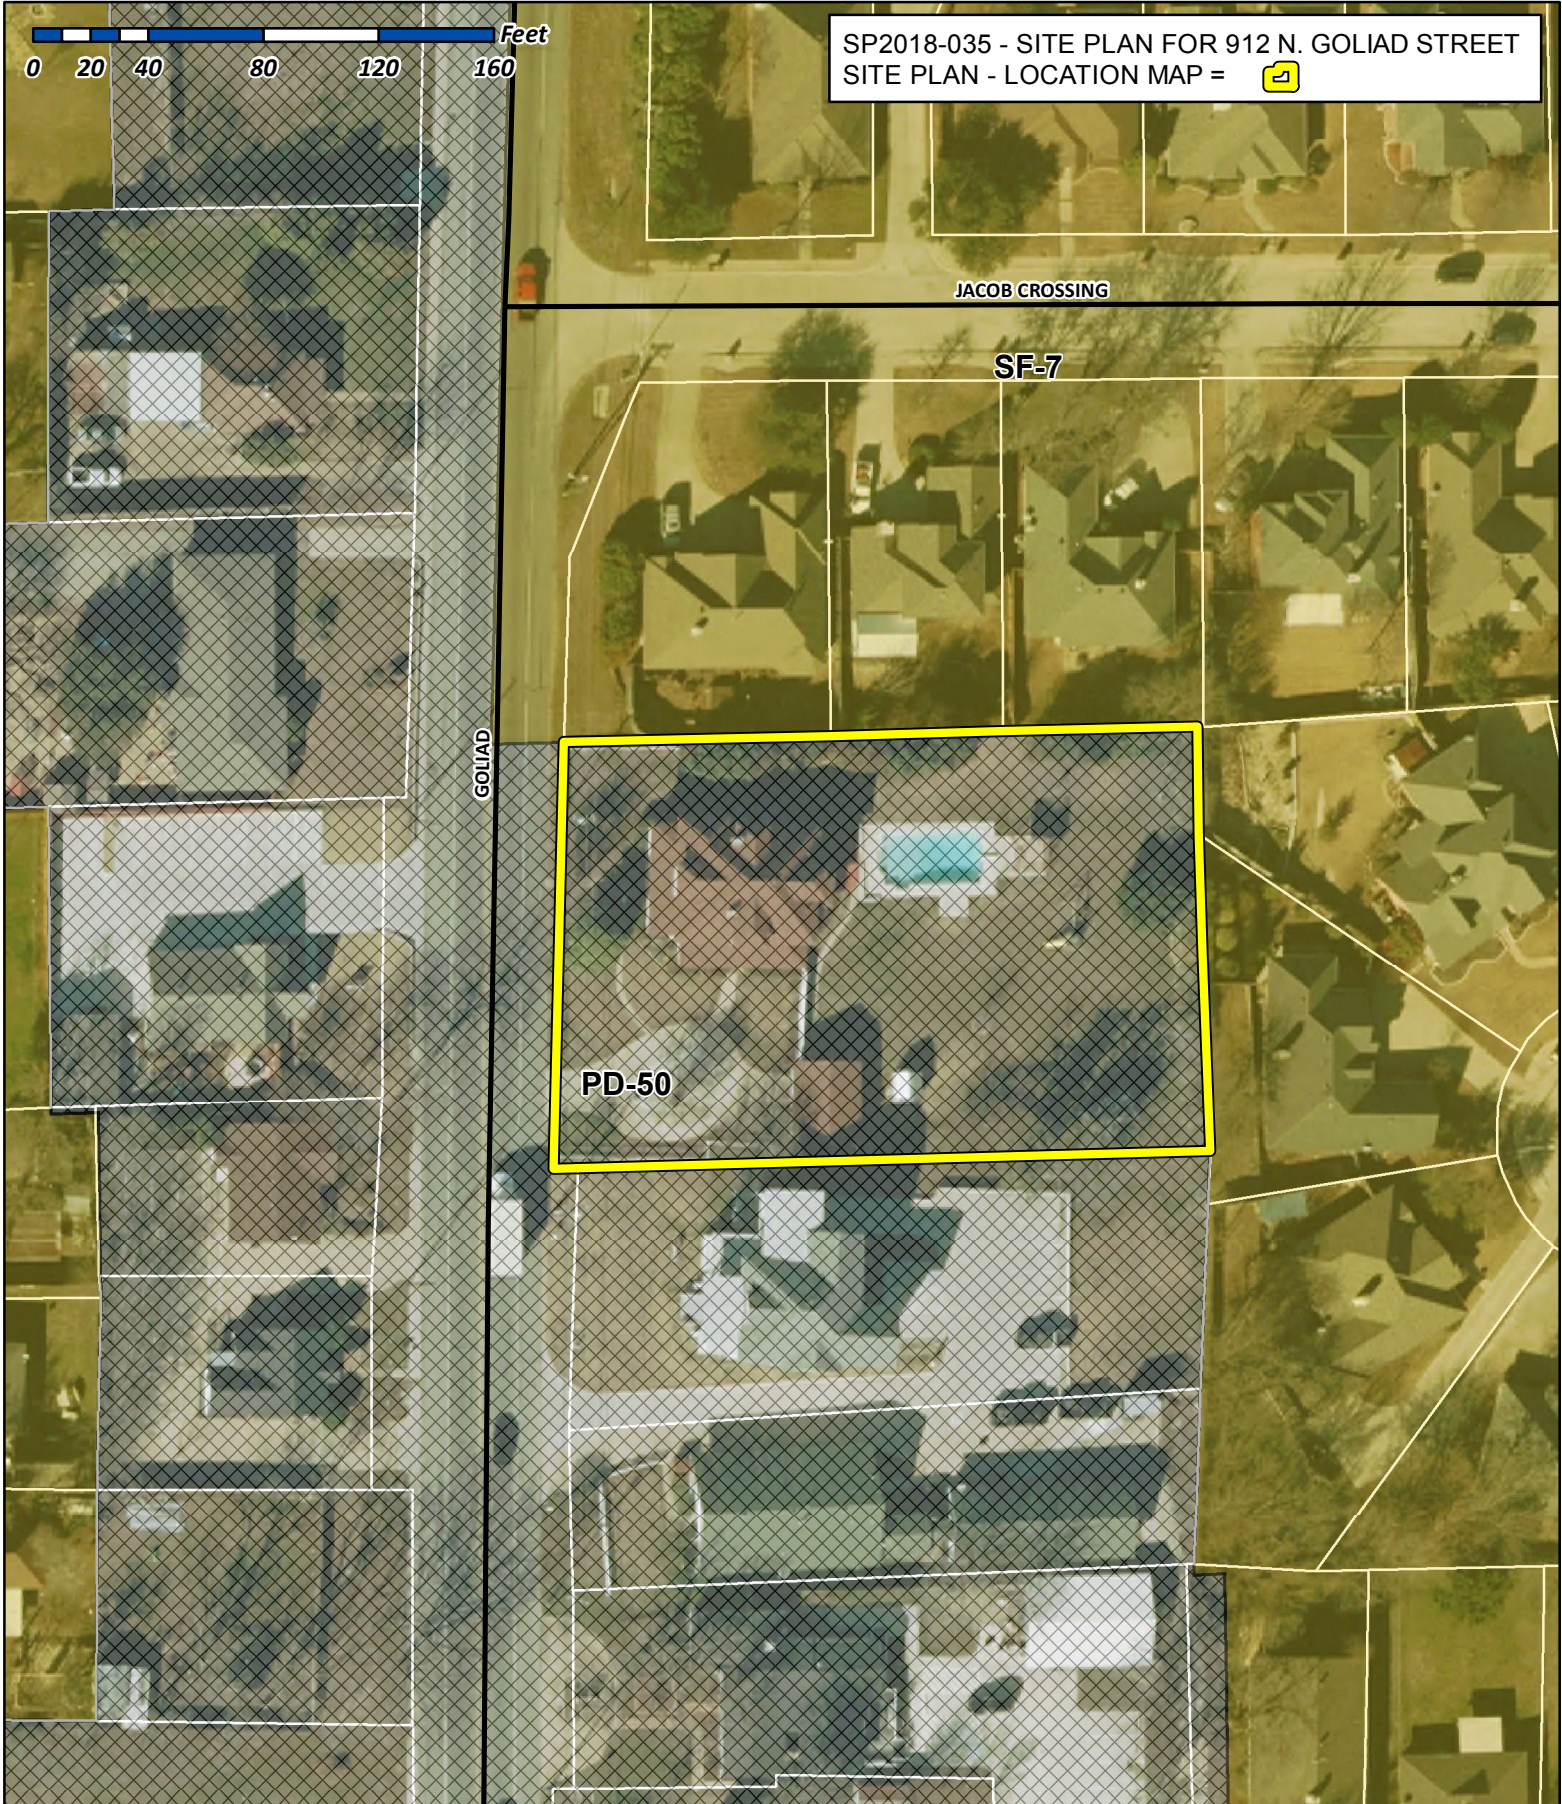


0 20 40 80 120 160 Feet

SP2018-035 - SITE PLAN FOR 912 N. GOLIAD STREET
SITE PLAN - LOCATION MAP = 




City of Rockwall

Planning & Zoning Department
385 S. Goliad Street
Rockwall, Texas 75032
(P): (972) 771-7745
(W): www.rockwall.com



The City of Rockwall GIS maps are continually under development and therefore subject to change without notice. While we endeavor to provide timely and accurate information, we make no guarantees. The City of Rockwall makes no warranty, express or implied, including warranties of merchantability and fitness for a particular purpose. Use of the information is the sole responsibility of the user.



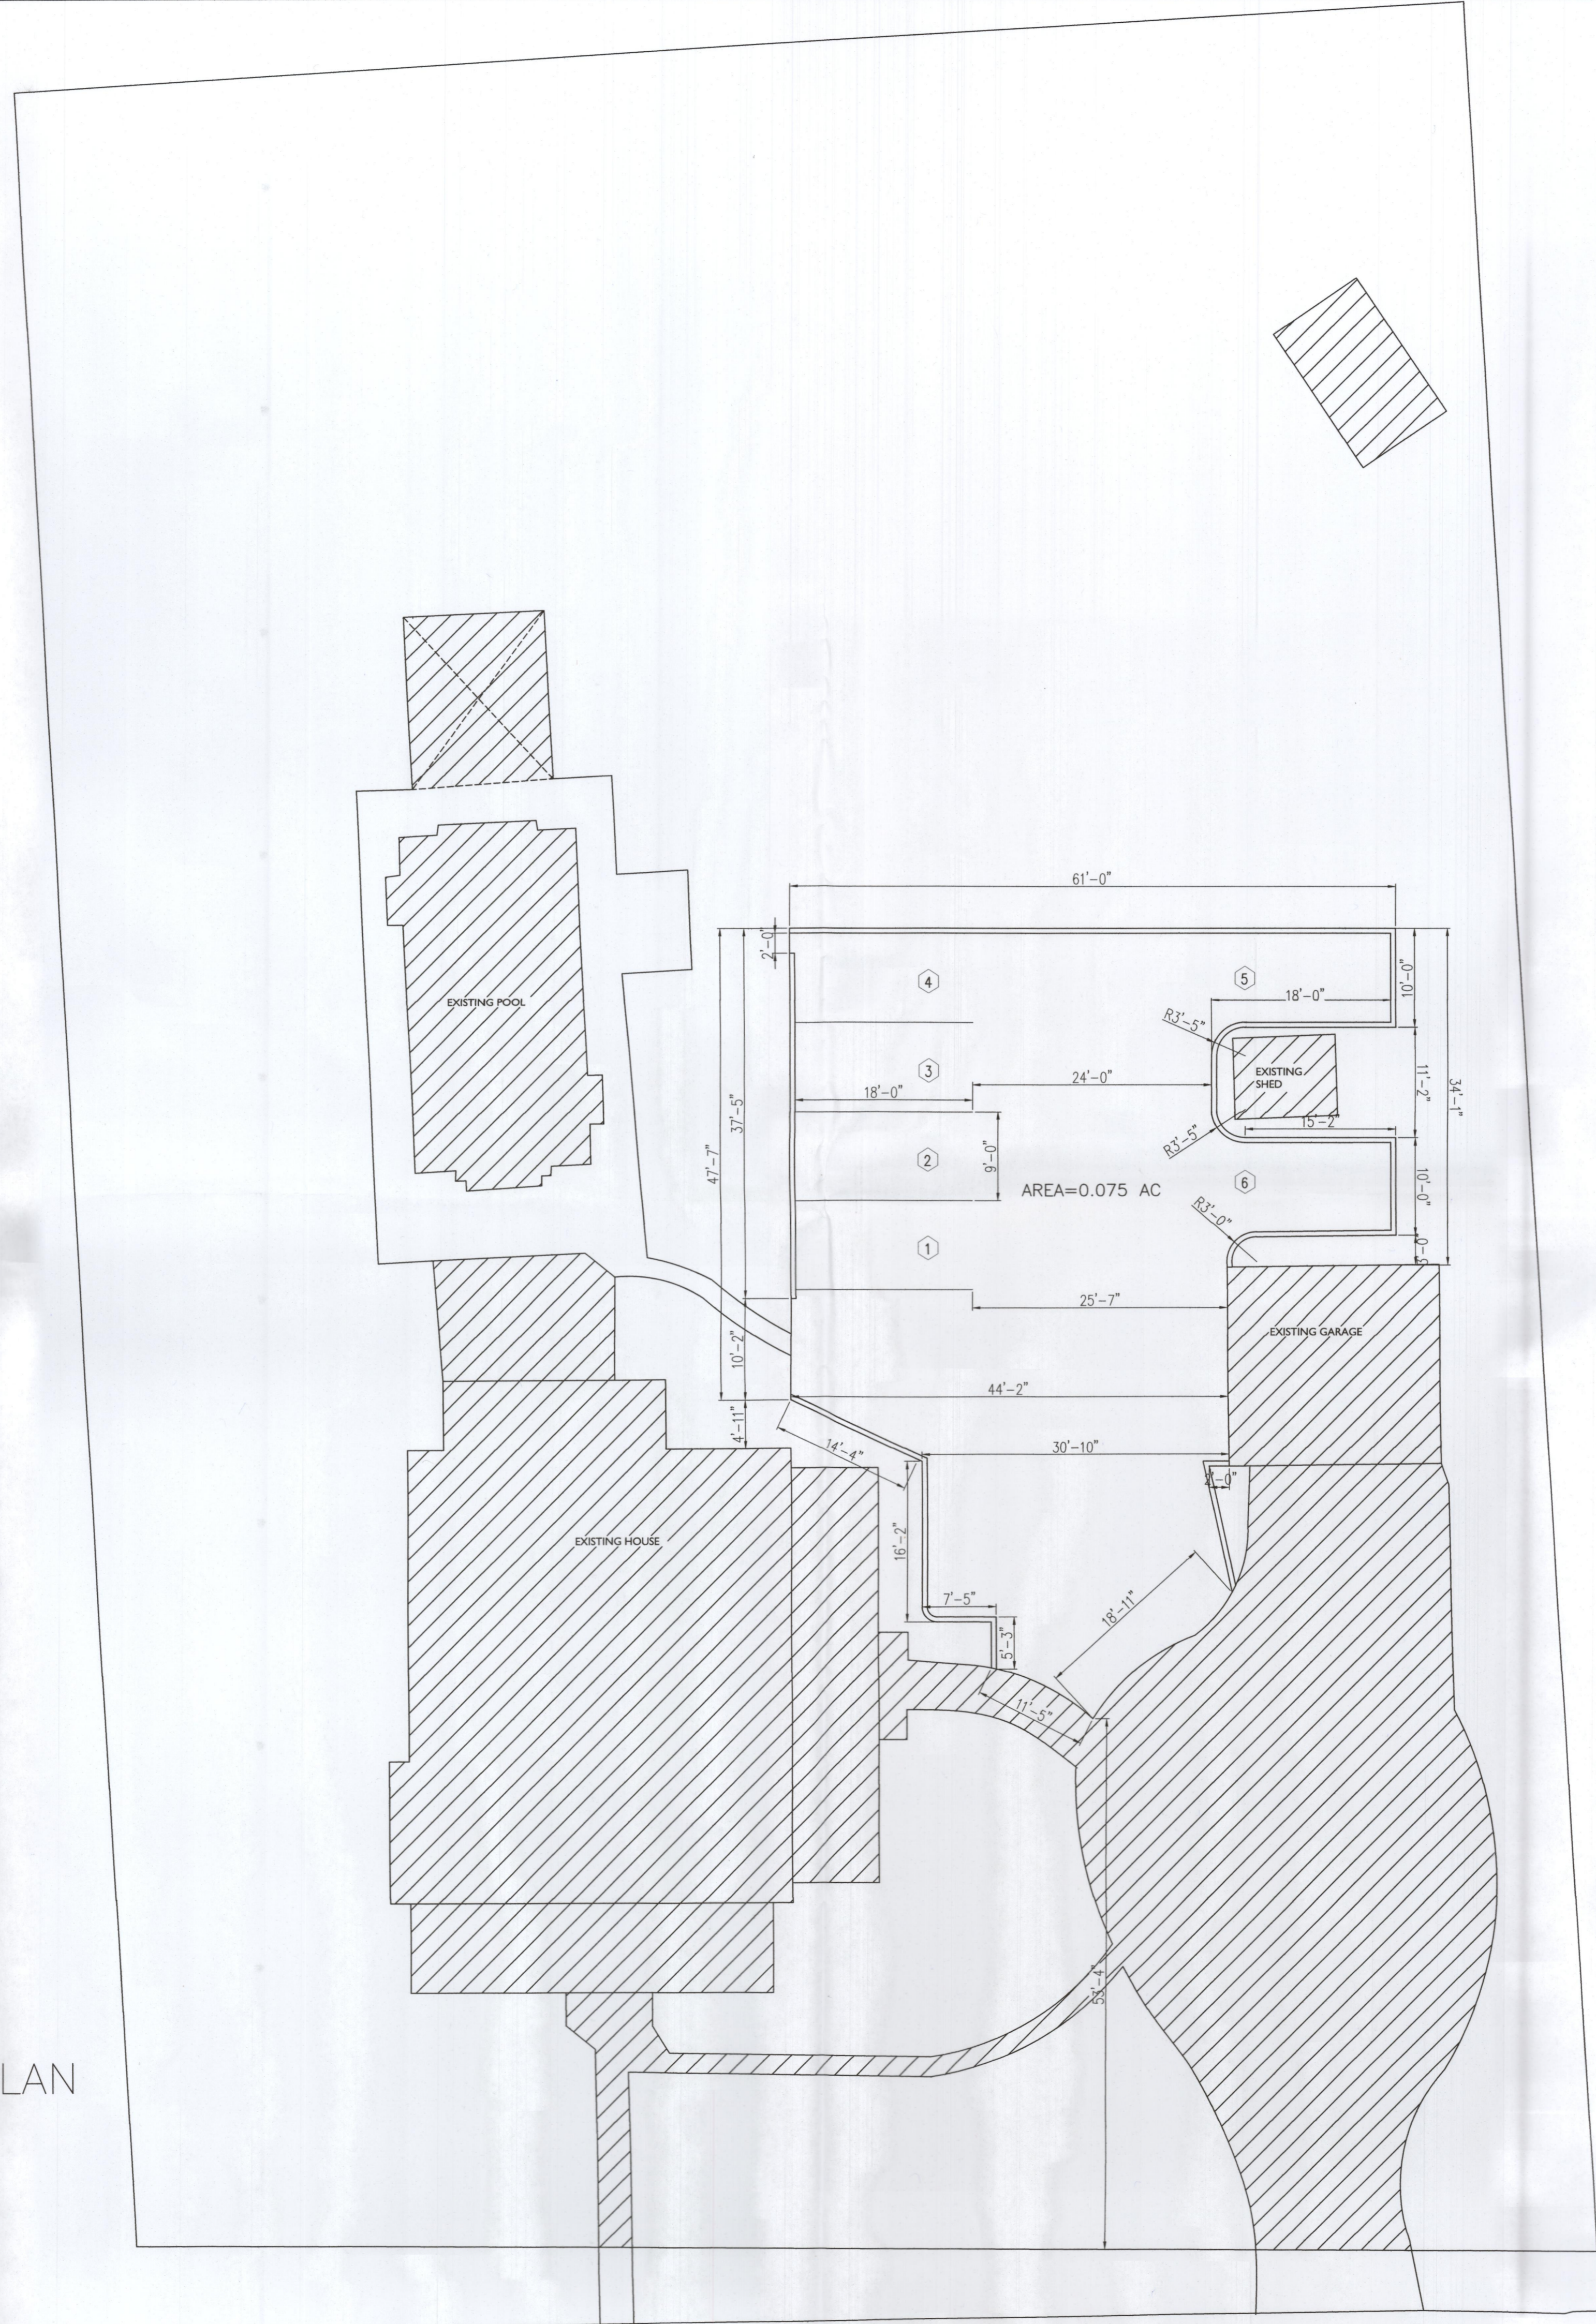

1 PARKING COUNT

PROPOSED PAVING PLAN
SCALE: 1" = 10'-0"

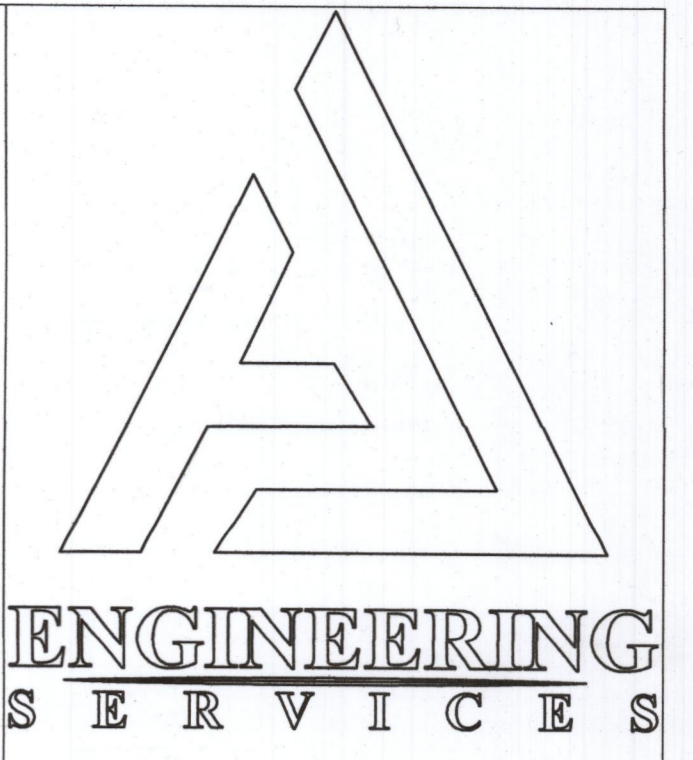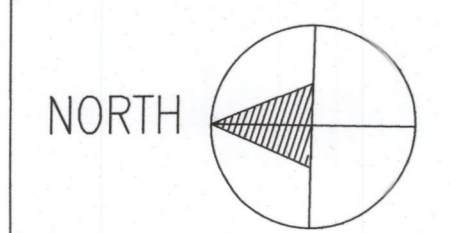

AJ
ENGINEERING
SERVICES LLC

FIRM# F-19793
OFFICE@AJENGINEERINGS.COM
WWW.AJENGINEERINGS.COM
PHONE:(469)432-6093
FORT WORTH, TX 76137

COPYRIGHT
AJ ENGINEERING SERVICES
LLC


DRAWINGS ISSUED FOR:
PERMIT: 11/2/2018
PRICING:
CONSTRUCTION:
DRAWING BY: AJ
CHECKED BY: AJ

REVISIONS:

1-.....	00/00/2018
2-.....	00/00/2018
3-.....	00/00/2018


NEW PARKING

912 N GOLIAD
ST, Rockwall
TX 75087

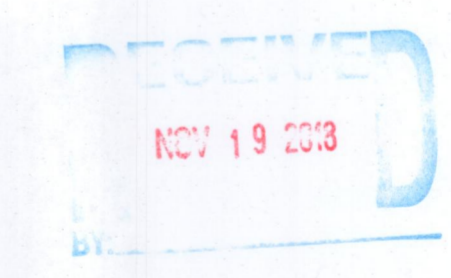

2018-035

FILE COPY

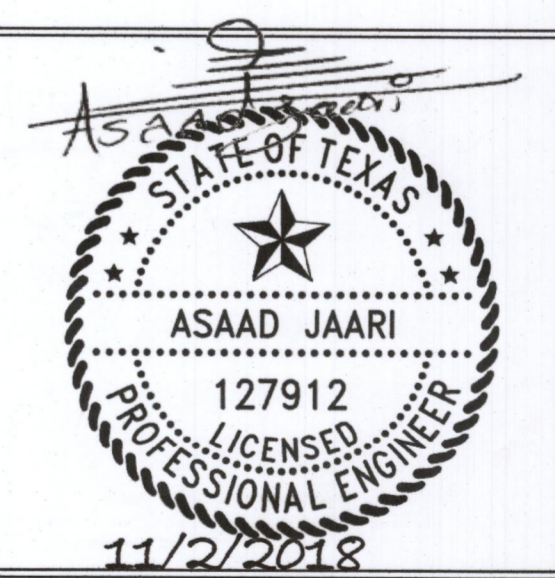


SHEET TITLE
PROPOSED
PAVING PLAN

SHEET# **CI**

N. GOLIAD STREET
VARIABLE WIDTH

PROJECT #18054

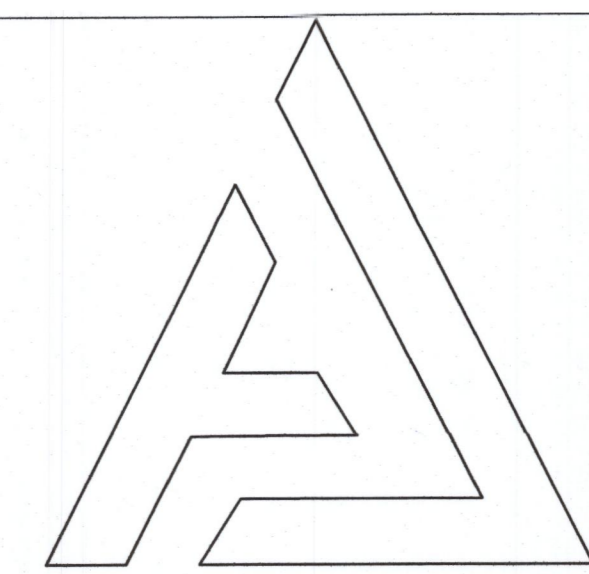

ENGINEERING
SERVICES

AJ
ENGINEERING
SERVICES LLC

FIRM# F-19793
OFFICE@AJENGINEERINGS.COM
WWW.AJENGINEERINGS.COM
PHONE:(469)432-6093
FORT WORTH, TX 76137


COPYRIGHT
AJ ENGINEERING SERVICES
LLC

DRAWINGS ISSUED FOR:
PERMIT: 11/2/2018
PRICING:
CONSTRUCTION:
DRAWING BY: AJ
CHECKED BY: AJ

REVISIONS:
1-..... 00/00/2018
2-..... 00/00/2018
3-..... 00/00/2018

NEW PARKING





912 N GOLIAD
ST, Rockwall
TX 75087

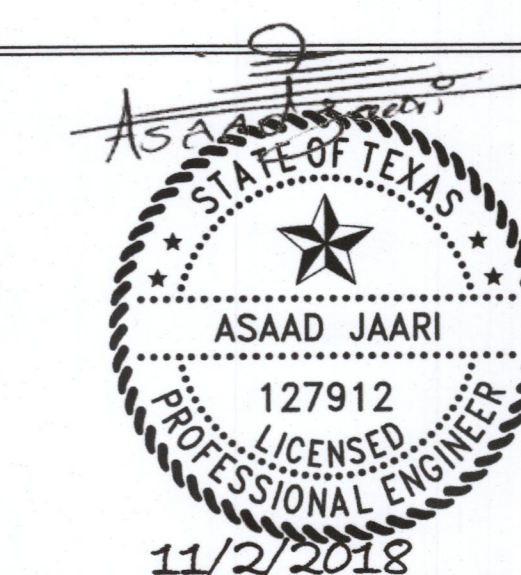

SHEET TITLE
CONSTRUCTION
DETAILS

SHEET# **C3**

PROJECT #18054

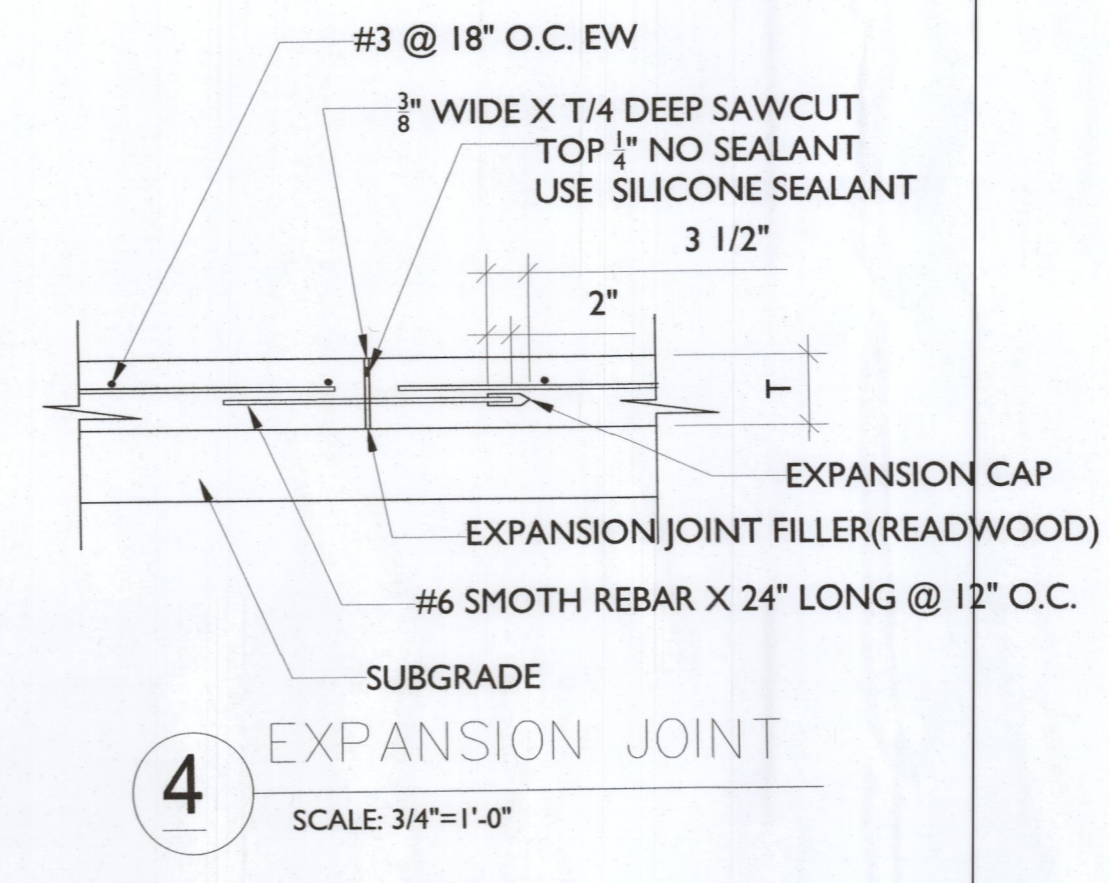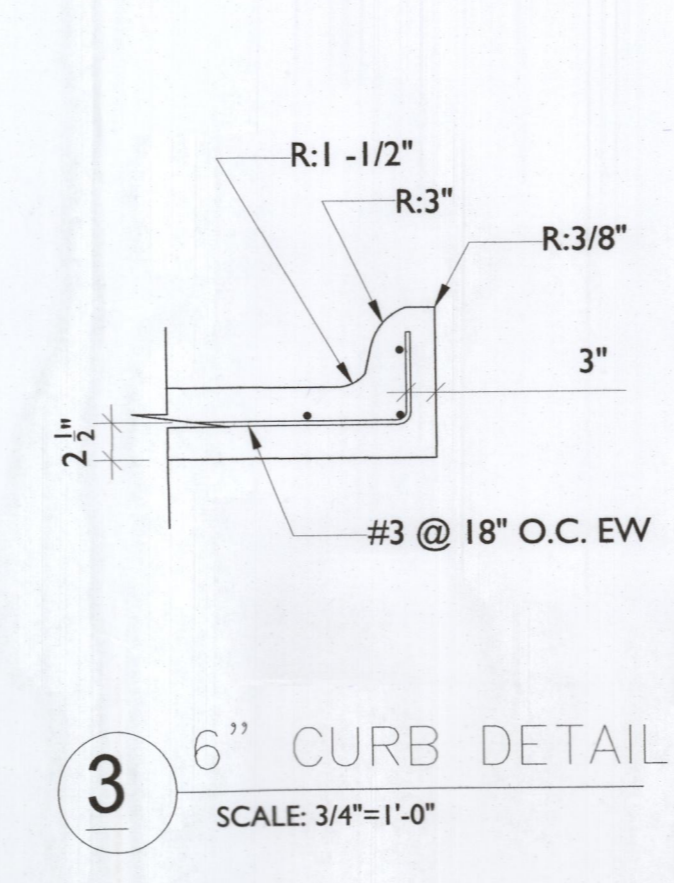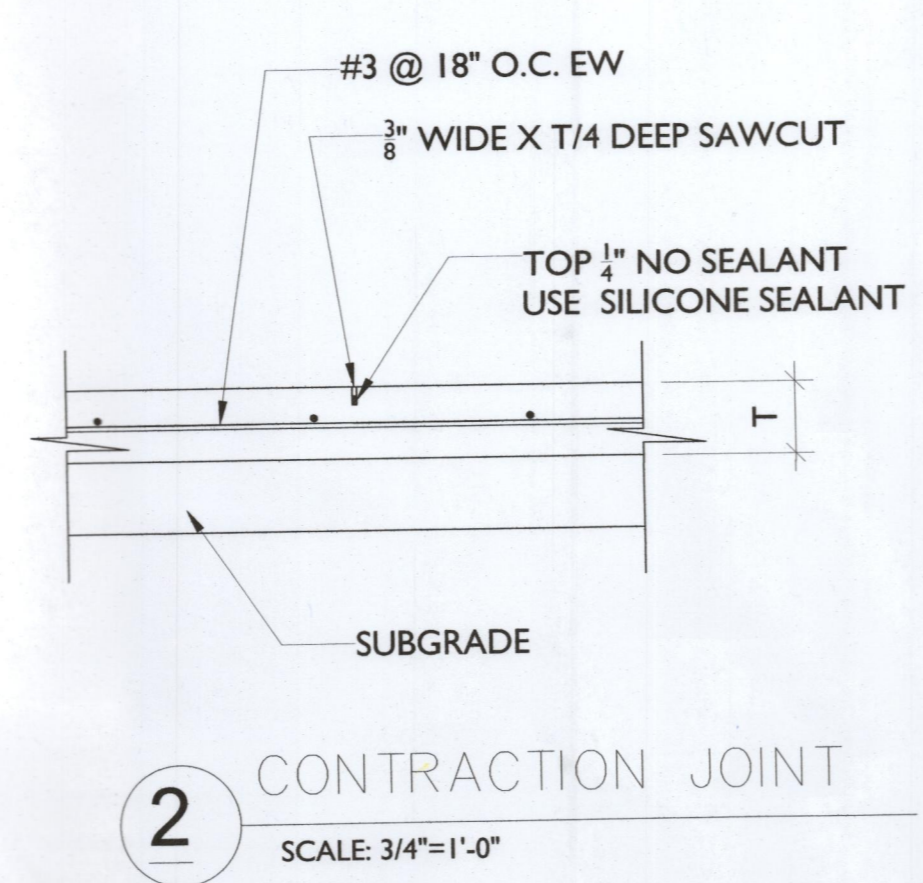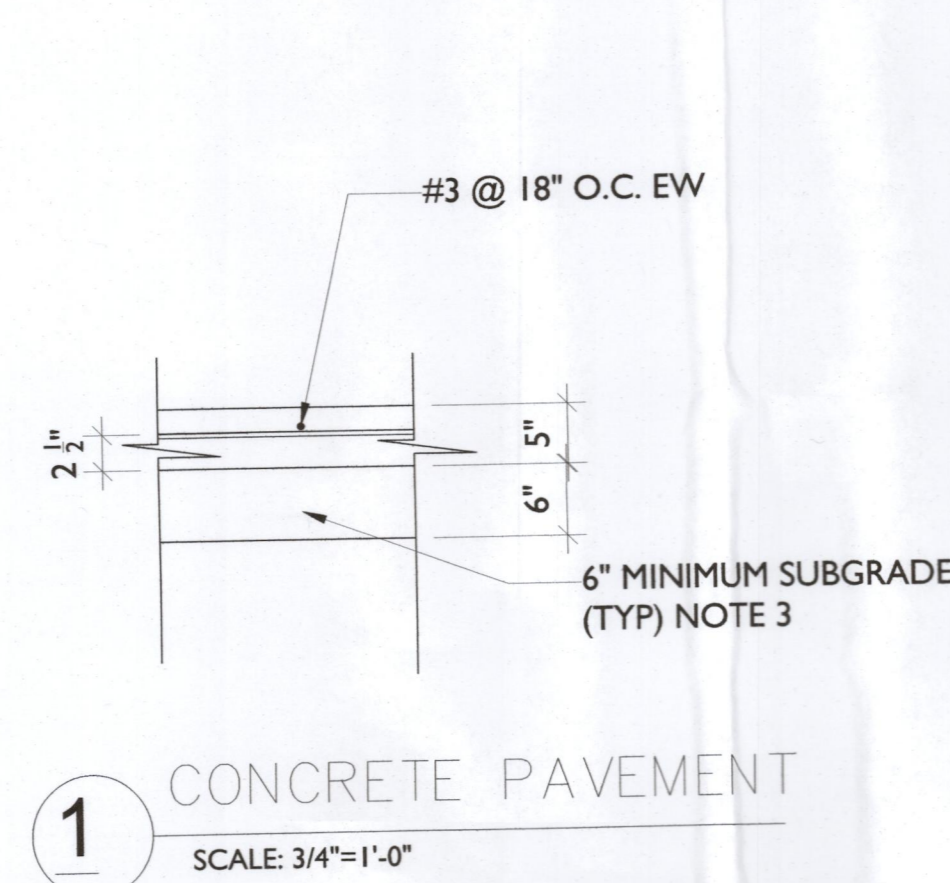

GENERAL PAVING NOTE:

1. CONCRETE STRENGTH AT 28 DAYS = 3500 PSI.
2. JOINTS SHALL BE PLACED AT A MAXIMUM SPACING OF 15'-0".
3. PAVEMENT SUBGRADE SHALL BE COMPACTED TO A MINIMUM OF 95% MAXIMUM STANDARD DENSITY AND AT MINIMUM OF 2% ABOVE THE OPTIMUM MOISTURE CONTENT.
4. MAXIMUM SLOPE IN LANDSCAPE SHALL NOT EXCEED 3:1.
5. ALL CURBS HEIGHT ARE 6" UNLESS NOTED OTHERWISE.
6. SLOPE SHALL NOT EXCEED 5%.
7. CONTRACTOR SHALL ADJUST EXITING VALVES, MANHOLES RIMS ETC. TO MATCH NEW GRADE.







