



DEVELOPMENT APPLICATION

City of Rockwall
Planning and Zoning Department
385 S. Goliad Street
Rockwall, Texas 75087

STAFF USE ONLY
PLANNING & ZONING CASE NO.

NOTE: THE APPLICATION IS NOT CONSIDERED ACCEPTED BY THE CITY UNTIL THE PLANNING DIRECTOR AND CITY ENGINEER HAVE SIGNED BELOW.

DIRECTOR OF PLANNING:
CITY ENGINEER:

PLEASE CHECK THE APPROPRIATE BOX BELOW TO INDICATE THE TYPE OF DEVELOPMENT REQUEST [SELECT ONLY ONE BOX]:

PLATTING APPLICATION FEES:

- MASTER PLAT (\$100.00 + \$15.00 ACRE)¹
- PRELIMINARY PLAT (\$200.00 + \$15.00 ACRE)¹
- FINAL PLAT (\$300.00 + \$20.00 ACRE)¹
- REPLAT (\$300.00 + \$20.00 ACRE)¹
- AMENDING OR MINOR PLAT (\$150.00)
- PLAT REINSTATEMENT REQUEST (\$100.00)

SITE PLAN APPLICATION FEES:

- SITE PLAN (\$250.00 + \$20.00 ACRE)¹
- AMENDED SITE PLAN/ELEVATIONS/LANDSCAPING PLAN (\$100.00)

ZONING APPLICATION FEES:

- ZONING CHANGE (\$200.00 + \$15.00 ACRE)¹
- SPECIFIC USE PERMIT (\$200.00 + \$15.00 ACRE)¹
- PD DEVELOPMENT PLANS (\$200.00 + \$15.00 ACRE)¹

OTHER APPLICATION FEES:

- TREE REMOVAL (\$75.00)
- VARIANCE REQUEST (\$100.00)

NOTES:

¹: IN DETERMINING THE FEE, PLEASE USE THE EXACT ACREAGE WHEN MULTIPLYING BY THE PER ACRE AMOUNT FOR REQUESTS ON LESS THAN ONE ACRE, ROUND UP TO ONE (1) ACRE.

PROPERTY INFORMATION [PLEASE PRINT]

ADDRESS not yet assigned*

SUBDIVISION

LOT

BLOCK

GENERAL LOCATION NEC E Quail Run Road and 205

ZONING, SITE PLAN AND PLATTING INFORMATION [PLEASE PRINT]

CURRENT ZONING PD-70

CURRENT USE Undeveloped land

PROPOSED ZONING PD-70

PROPOSED USE Commercial (Retail)

ACREAGE 8.684 AC

LOTS [CURRENT]

LOTS [PROPOSED]

SITE PLANS AND PLATS: BY CHECKING THIS BOX YOU ACKNOWLEDGE THAT DUE TO THE PASSAGE OF HB3187 THE CITY NO LONGER HAS FLEXIBILITY WITH REGARD TO ITS APPROVAL PROCESS, AND FAILURE TO ADDRESS ANY OF STAFF'S COMMENTS BY THE DATE PROVIDED ON THE DEVELOPMENT CALENDAR WILL RESULT IN THE DENIAL OF YOUR CASE.

OWNER/APPLICANT/AGENT INFORMATION [PLEASE PRINT/CHECK THE PRIMARY CONTACT/ORIGINAL SIGNATURES ARE REQUIRED]

OWNER

APPLICANT DuWest Realty, LLC

CONTACT PERSON

CONTACT PERSON Bowen Hendrix

ADDRESS

ADDRESS 4403 North Central Expressway

CITY, STATE & ZIP

Suite 200

PHONE

CITY, STATE & ZIP Dallas, TX 75025

E-MAIL

PHONE (214) 918-1804

E-MAIL bowen@duwestrealty.com

NOTARY VERIFICATION [REQUIRED]

BEFORE ME, THE UNDERSIGNED AUTHORITY, ON THIS DAY PERSONALLY APPEARED Bowen Hendrix [OWNER] THE UNDERSIGNED, WHO STATED THE INFORMATION ON THIS APPLICATION TO BE TRUE AND CERTIFIED THE FOLLOWING:


I HEREBY CERTIFY THAT I AM THE OWNER FOR THE PURPOSE OF THIS APPLICATION; ALL INFORMATION SUBMITTED HEREIN IS TRUE AND CORRECT; AND THE APPLICATION FEE OF \$ 230.25 TO COVER THE COST OF THIS APPLICATION, HAS BEEN PAID TO THE CITY OF ROCKWALL ON THIS THE 11 DAY OF January 2022. BY SIGNING THIS APPLICATION, I AGREE THAT THE CITY OF ROCKWALL (I.E. "CITY") IS AUTHORIZED AND PERMITTED TO PROVIDE INFORMATION CONTAINED WITHIN THIS APPLICATION TO THE PUBLIC. THE CITY IS ALSO AUTHORIZED AND PERMITTED TO REPRODUCE ANY COPYRIGHTED INFORMATION SUBMITTED IN CONJUNCTION WITH THIS APPLICATION, IF SUCH REPRODUCTION IS ASSOCIATED OR IN RESPONSE TO A REQUEST FOR PUBLIC INFORMATION.*

GIVEN UNDER MY HAND AND SEAL OF OFFICE ON THIS THE 11 DAY OF January 2022


OWNER'S SIGNATURE

Bowen Hendrix
Lisa Caldwell

NOTARY PUBLIC IN AND FOR THE STATE OF TEXAS





Case Location Map = 
 SP2022-012
 Site Plan for DuWest Rockwall



City of Rockwall

Planning & Zoning Department
 385 S. Goliad Street
 Rockwall, Texas 75032
 (P): (972) 771-7745
 (W): www.rockwall.com

The City of Rockwall GIS maps are continually under development and therefore subject to change without notice. While we endeavor to provide timely and accurate information, we make no guarantees. The City of Rockwall makes no warranty, express or implied, including warranties of merchantability and fitness for a particular purpose. Use of the information is the sole responsibility of the user.





PRELIMINARY
 FOR REVIEW ONLY
 Not for construction purposes.
CLAYMOORE ENGINEERING
 ENGINEERING AND PLANNING
 CONSULTANTS
 DREW DONOSKY
 Engineer, No. 125651, Date 3/16/2022

**DUWEST ROCKWALL
 SH 205 & QUAIL RUN RD
 ROCKWALL, TX**

CITY SITE PLAN

DESIGN: LRR
 DRAWN: LRR
 CHECKED: CLC
 DATE: 3/16/2022
 SHEET
SP-1
 File No. 2020-021
 CASE # Z2022-003

SITE DATA TABLE	
SITE AREA	8.684 AC (378,275 SF)
ZONING	PD-70
PROPOSED USE	RETAIL/ DRIVE-THRU RESTAURANT
BUILDING SIZE	BUILDING B- 10,000 SF BUILDING C- 10,000 SF
PATIO AREA	2,777 SF
LOT COVERAGE	5.2 %
FLOOR TO AREA RATIO	0.05 : 1
BUILDING HEIGHT	1 STORY
TOTAL IMPERVIOUS	116,406 SF (30.8%)
OPEN SPACE	6.04 AC (69.2%)

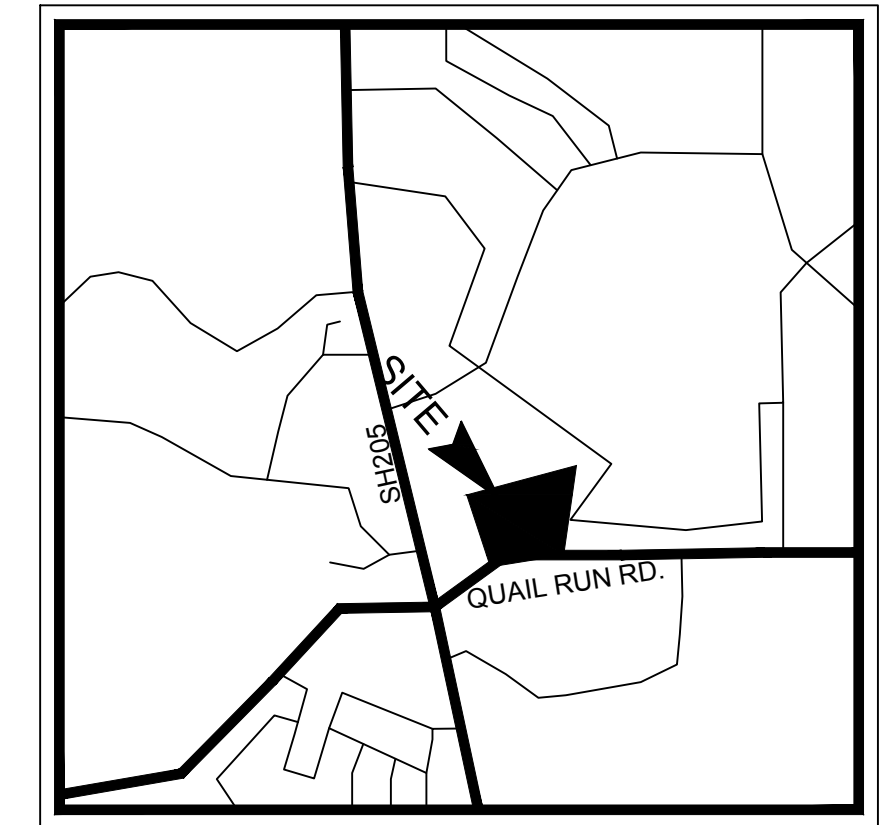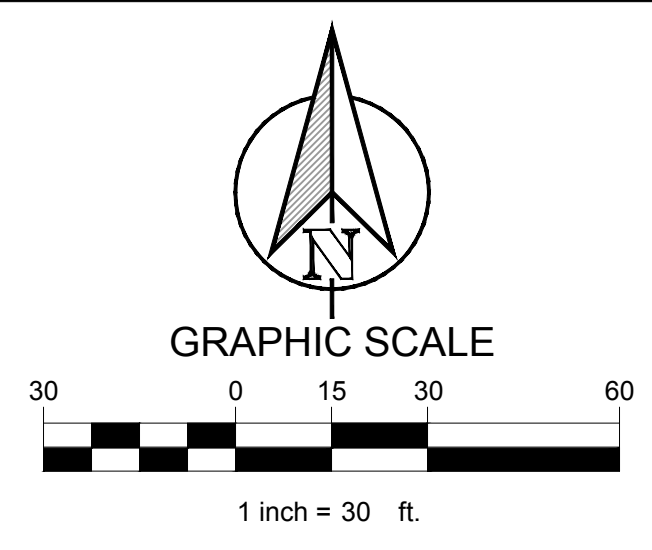

VICINITY MAP
 N.T.S.

CONSTRUCTION SCHEDULE	
	PROPOSED STANDARD DUTY CONCRETE PAVEMENT
	PROPOSED HEAVY DUTY CONCRETE PAVEMENT
	PROPOSED SIDEWALK CONCRETE PAVEMENT
	PROPERTY LINE
	PROPOSED CONCRETE CURB AND GUTTER
	PROPOSED FIRE LANE
	PROPOSED SAWCUT
	PARKING COUNT

CONSTRUCTION SCHEDULE	
①	PROP. FULL DEPTH SAWCUT
②	PROP. 4" PARKING STALL STRIPING COLOR: WHITE (TYP)
③	PROP. CURB & GUTTER
④	PROP. PEDESTRIAN RAMP
⑤	PROP. HANDICAP SYMBOL
⑥	PROP. PAVEMENT STRIPING
⑦	PROP. SIDEWALK


DUWEST ROCKWALL, TX	
LEGAL DESCRIPTION AND/OR ADDRESS: STONE CREEK BALANCE LTD ABSTRACT, NO 131 8.684 AC (378,275 SF)	
OWNER: DUWEST REALTY, LLC 4403 N. CENTRAL EXWAY SUITE #200 DALLAS, TX 75025 CONTACT: BOWEN HENDRIX PH: 214.918.1804	
APPLICANT: CLAYMOORE ENGINEERING, INC. 1903 CENTRAL DRIVE, SUITE #406 BEDFORD, TX 76021 CONTACT: DREW DONOSKY PH: 817.281.0572	
CASE NUMBER Z2022-003	

I HEREBY CERTIFY THAT THE ABOVE AND FOREGOING SITE PLAN FOR A DEVELOPMENT IN THE CITY OF ROCKWALL, TEXAS, WAS APPROVED BY THE PLANNING AND ZONING COMMISSION OF THE CITY OF ROCKWALL ON THE ____ DAY OF ____.

WITNESS OUR HANDS THIS ____ DAY OF ____.

PARKING DATA TABLE	
PARKING REQ.	
RETAIL (10,000 SF) 1/250 SF	40 SPACES
DRIVE-THRU RESTAURANT (10,000 SF) 1/100 SF	100 SPACES
PATIO (2,777 SF) 1/100 SF	28 SPACES
TOTAL:	168 SPACES
ADA PARKING	6 SPACES
PARKING PROVIDED	168 SPACES (6 ADA)

- NOTES:**
- A SEPARATE SIGNAGE PERMIT IS REQUIRED BY THE CITY OF ROCKWALL.
 - ALL WALLS 3' IN HEIGHT OR GREATER SHALL BE DESIGNED BY AN ENGINEER, LICENSED IN THE STATE OF TEXAS.
 - ALL WALLS MUST BE ROCK OR STONE FACE. NO WALLS SHALL BE SMOOTH CONCRETE.
 - NO TREES SHALL BE PLANTED WITHIN 10' OF NON-STEEL ENCASED PUBLIC UTILITIES.
 - SOD MUST BE LAID WITHIN ALL DISTURBED R.O.W. BEFORE ACCEPTANCE OF PROJECT.

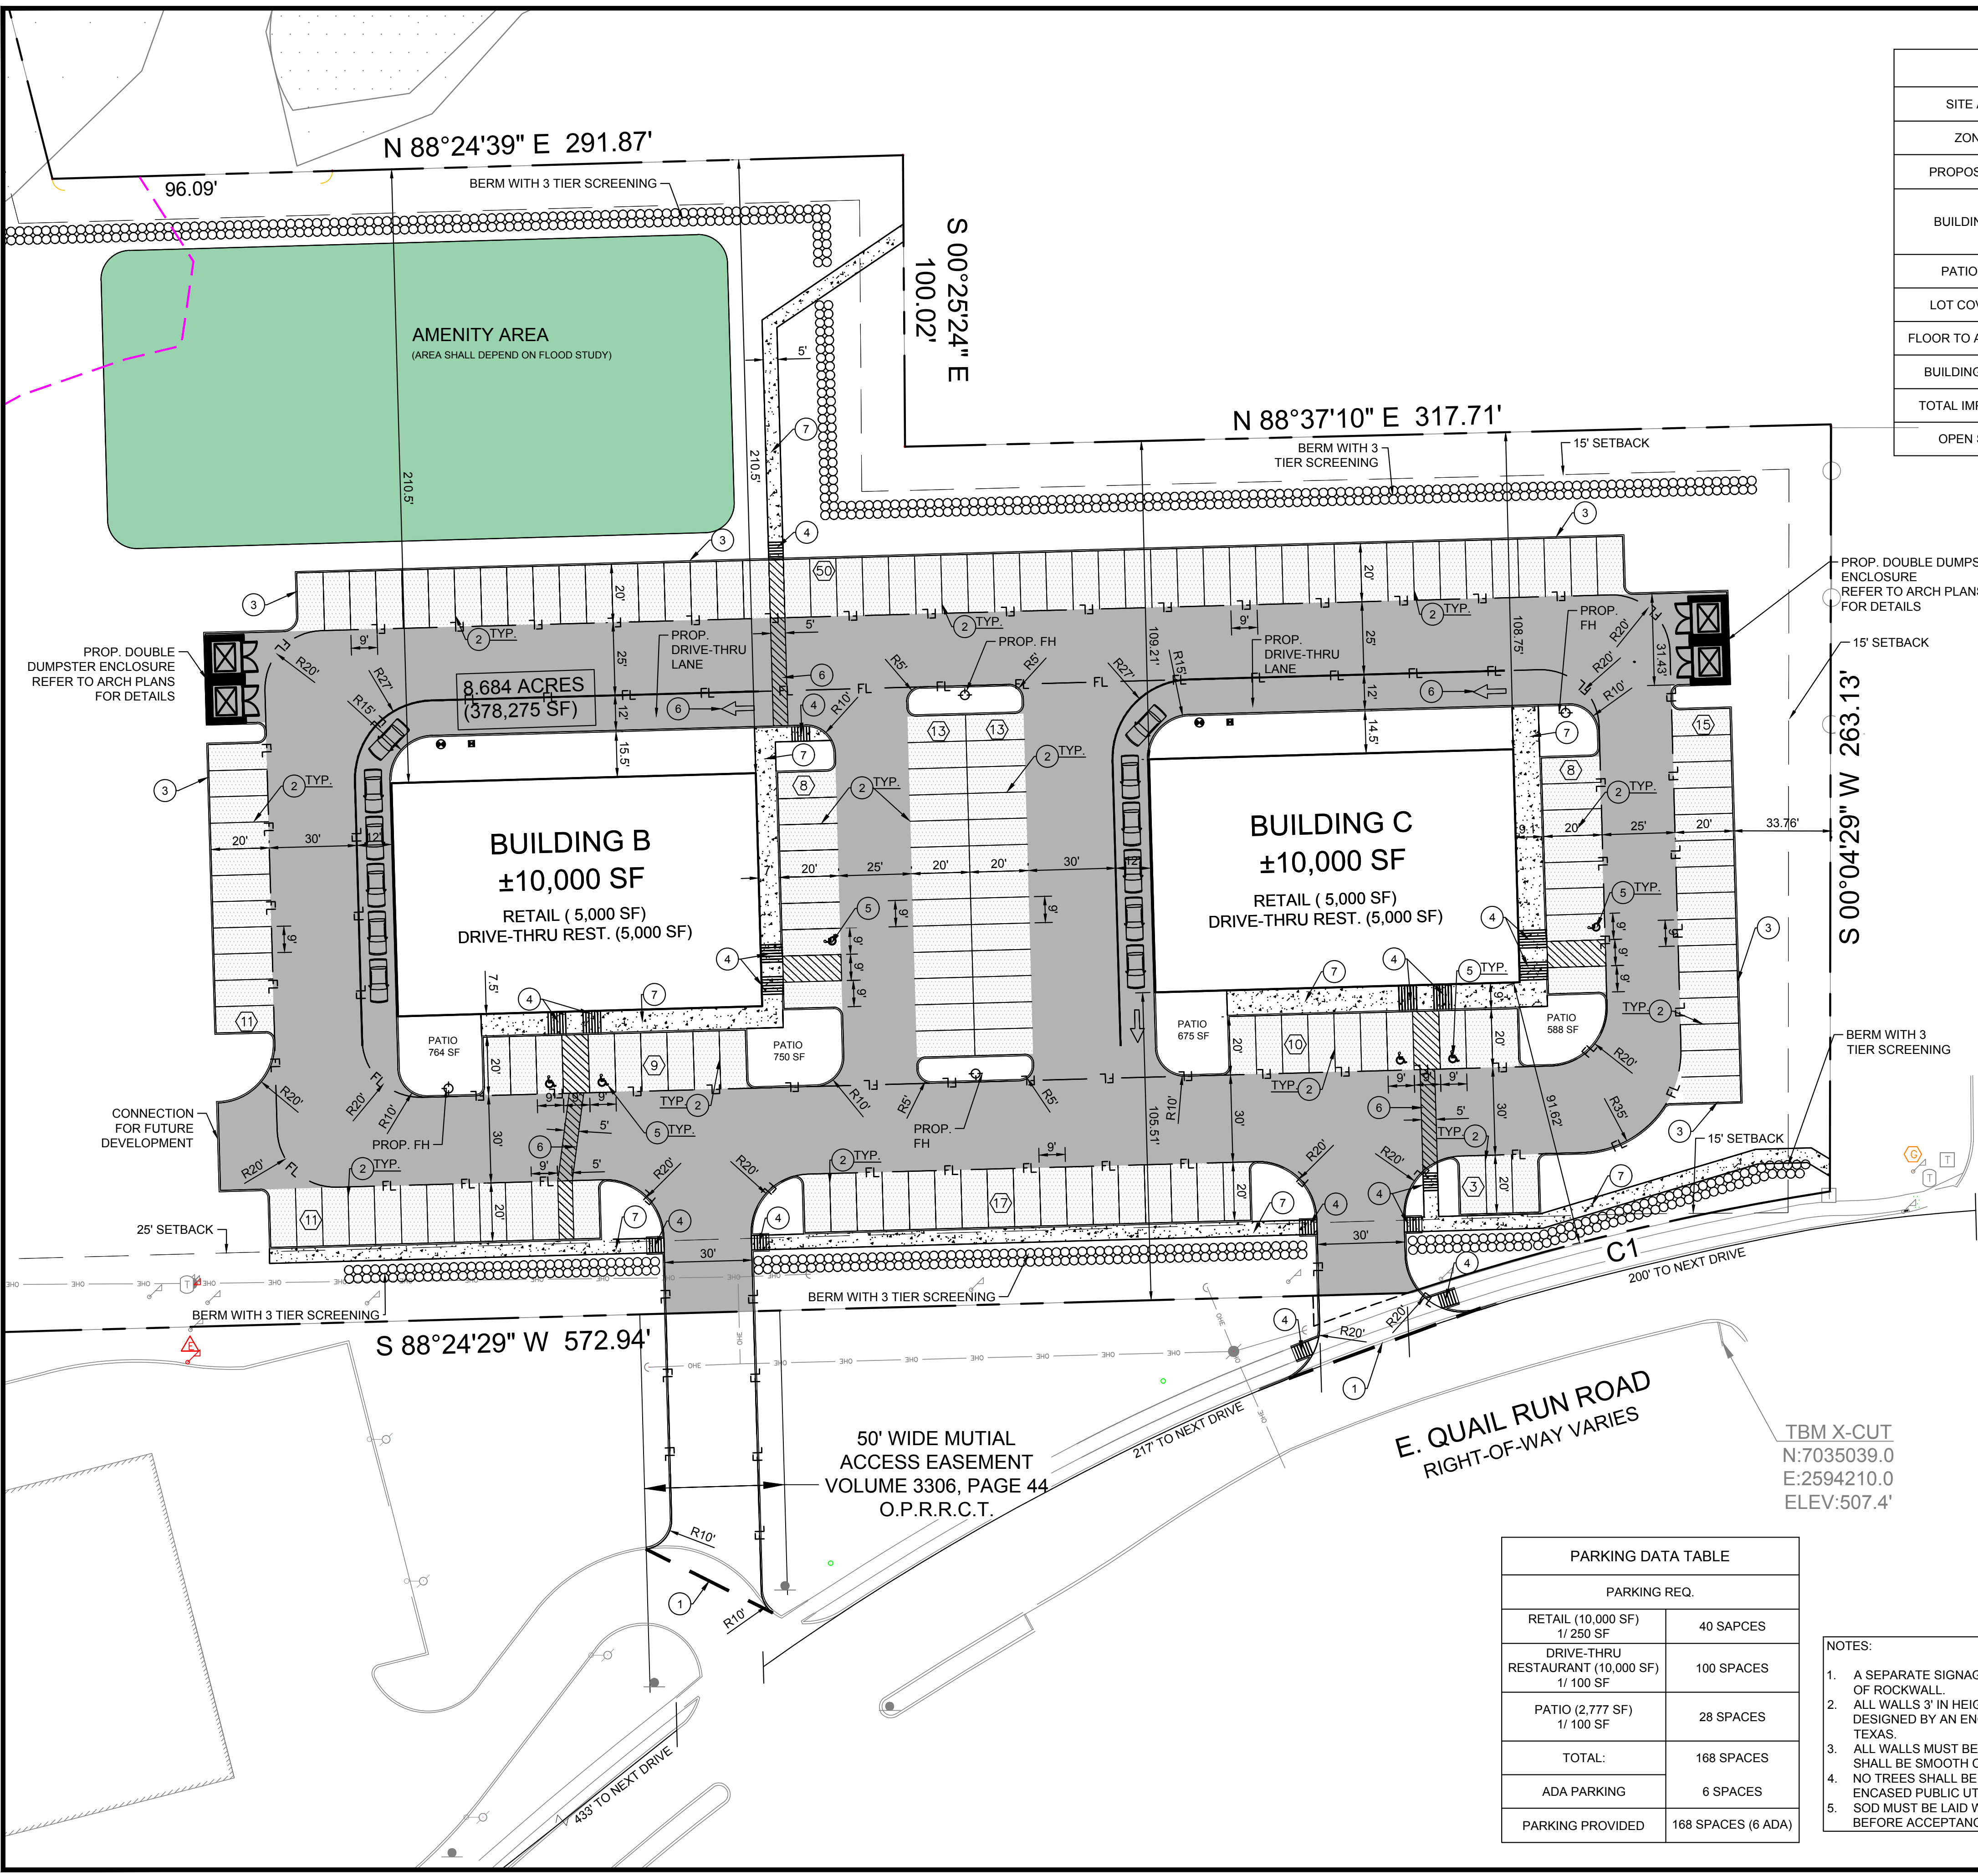

PLOTTED BY: LYNN ROWLAND
 PLOT DATE: 3/16/2022 7:09 PM
 LOCATION: Z:\PROJECTS\PROJECTS\2022-002 DUWEST ROCKWALL\CADD\SHEETS\SP-1 SITE PLAN.DWG
 LAST SAVED: 3/16/2022 5:39 PM

DUWEST - ROCKWALL

DESIGN SIGN-OFF

MATERIALS



MAC - METAL PANEL - SMOKED BIRCH



HARDIE PLANK SMOOTH LAP SIDING - NIGHT GRAY



STUCCO - SW #6063 NICE WHITE



DUWEST ROCKWALL - DESIGN SIGN-OFF

ROCKWALL, TX

modus architecture


THIS DRAWING IS CONCEPTUAL AND SHOULD ONLY BE USED AS AN INFORMATIVE REFERENCE. ALL DIMENSIONS, UTILITY EASEMENTS, SETBACKS, LOT PROPERTY LINES, GRADING, AND SITE REQUIREMENTS SHOULD BE VERIFIED FOR ACCURACY BY OWNER AND/OR OWNER'S SURVEYOR AND CIVIL ENGINEER. PARTICULAR CONSIDERATION SHOULD BE GIVEN TO OPEN SPACE REQUIREMENTS, PAVEMENT TYPES, DRIVE ENTRIES, ETC.

DATE:03/18/2022

MATERIALS



MAC - METAL PANEL - SMOKED BIRCH

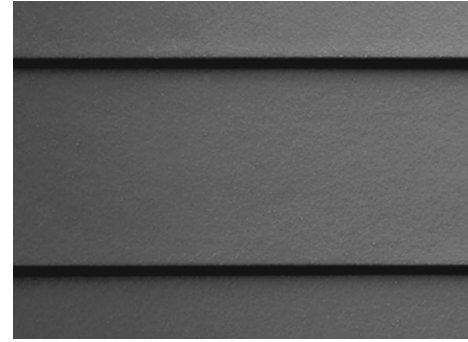

HARDIE PLANK SMOOTH LAP SIDING - NIGHT GRAY



STUCCO - SW #6063 NICE WHITE



DUWEST ROCKWALL - DESIGN SIGN-OFF


ROCKWALL, TX

modus architecture


THIS DRAWING IS CONCEPTUAL AND SHOULD ONLY BE USED AS AN INFORMATIVE REFERENCE. ALL DIMENSIONS, UTILITY EASEMENTS, SETBACKS, LOT PROPERTY LINES, GRADING, AND SITE REQUIREMENTS SHOULD BE VERIFIED FOR ACCURACY BY OWNER AND/OR OWNER'S SURVEYOR AND CIVIL ENGINEER. PARTICULAR CONSIDERATION SHOULD BE GIVEN TO OPEN SPACE REQUIREMENTS, PAVEMENT TYPES, DRIVE ENTRIES, ETC.

DATE:03/18/2022

ELEVATIONS

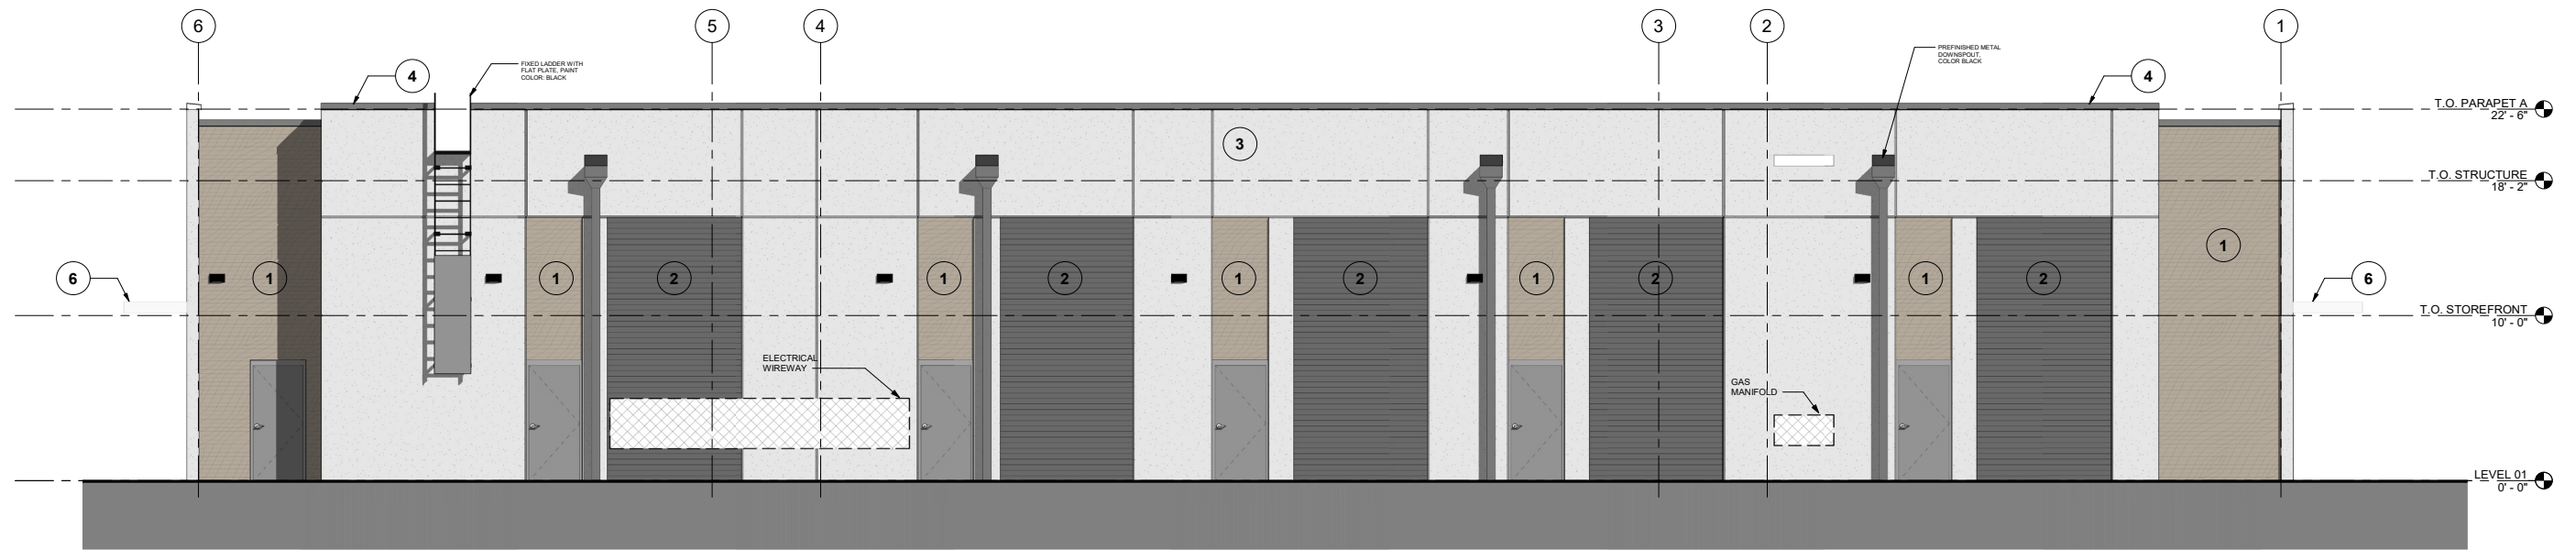

3 DESIGN SIGN OFF - NORTH ELEVATION
1/4" = 1'-0"

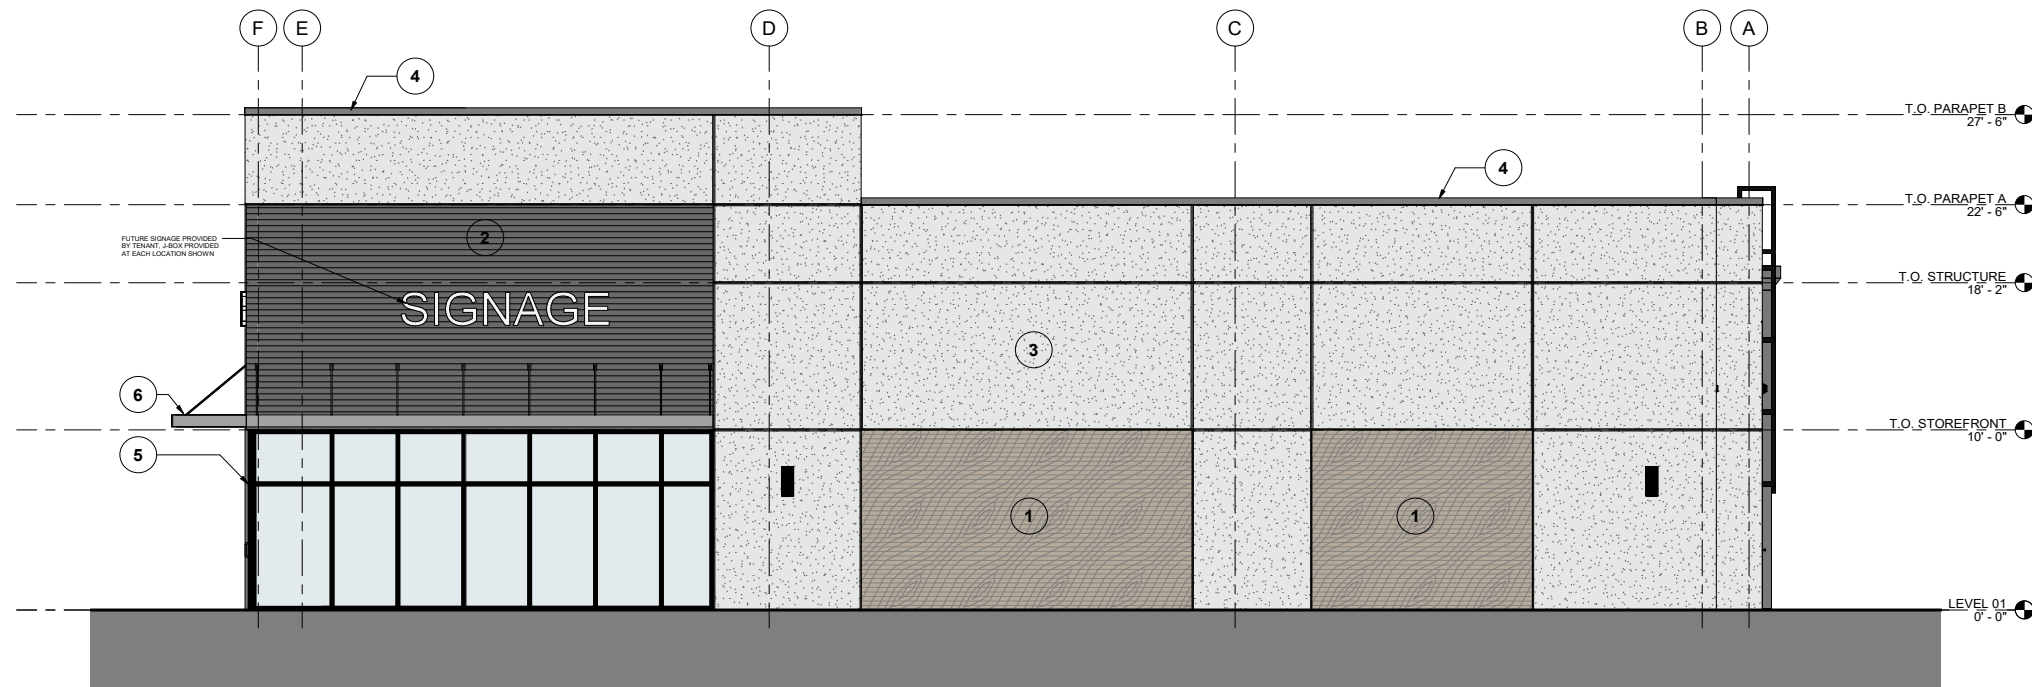


4 DESIGN SIGN OFF - EAST ELEVATION
1/4" = 1'-0"


EXTERIOR ELEVATION MATERIAL CALCULATION					
ELEVATION	ARCH METAL	LAP SIDING	EIFS	GLAZING	TOTAL
NORTH	457 SF = 17%	638 SF = 23%	1665 SF = 60%	0 SF = 0%	2760 SF
SOUTH	225 SF = 7%	879 SF = 26%	1288 SF = 38%	985 SF = 29%	3377 SF
EAST	300 SF = 15%	317 SF = 16%	1151 SF = 56%	253 SF = 13%	2021 SF
WEST	284 SF = 14%	317 SF = 16%	1151 SF = 56%	269 SF = 14%	2021 SF
TOTAL	1266 SF = 12%	2151 SF = 21%	5255 SF = 52%	1507 SF = 15%	10,179 SF

LEGEND	
1	MAC METAL PANEL BOD: SMOKED BIRCH
2	LAP SIDING BOD: HARDIE PLANK LAP SIDING SMOOTH COLOR: NIGHT GRAY
3	EIFS W/ FIBERGLASS MESH BOD: CREAM
4	PREFINISHED COPING CAPS
5	STOREFRONT SYSTEM, BLACK ANODIZED
6	PREFINISHED METAL CANOPY

ELEVATIONS

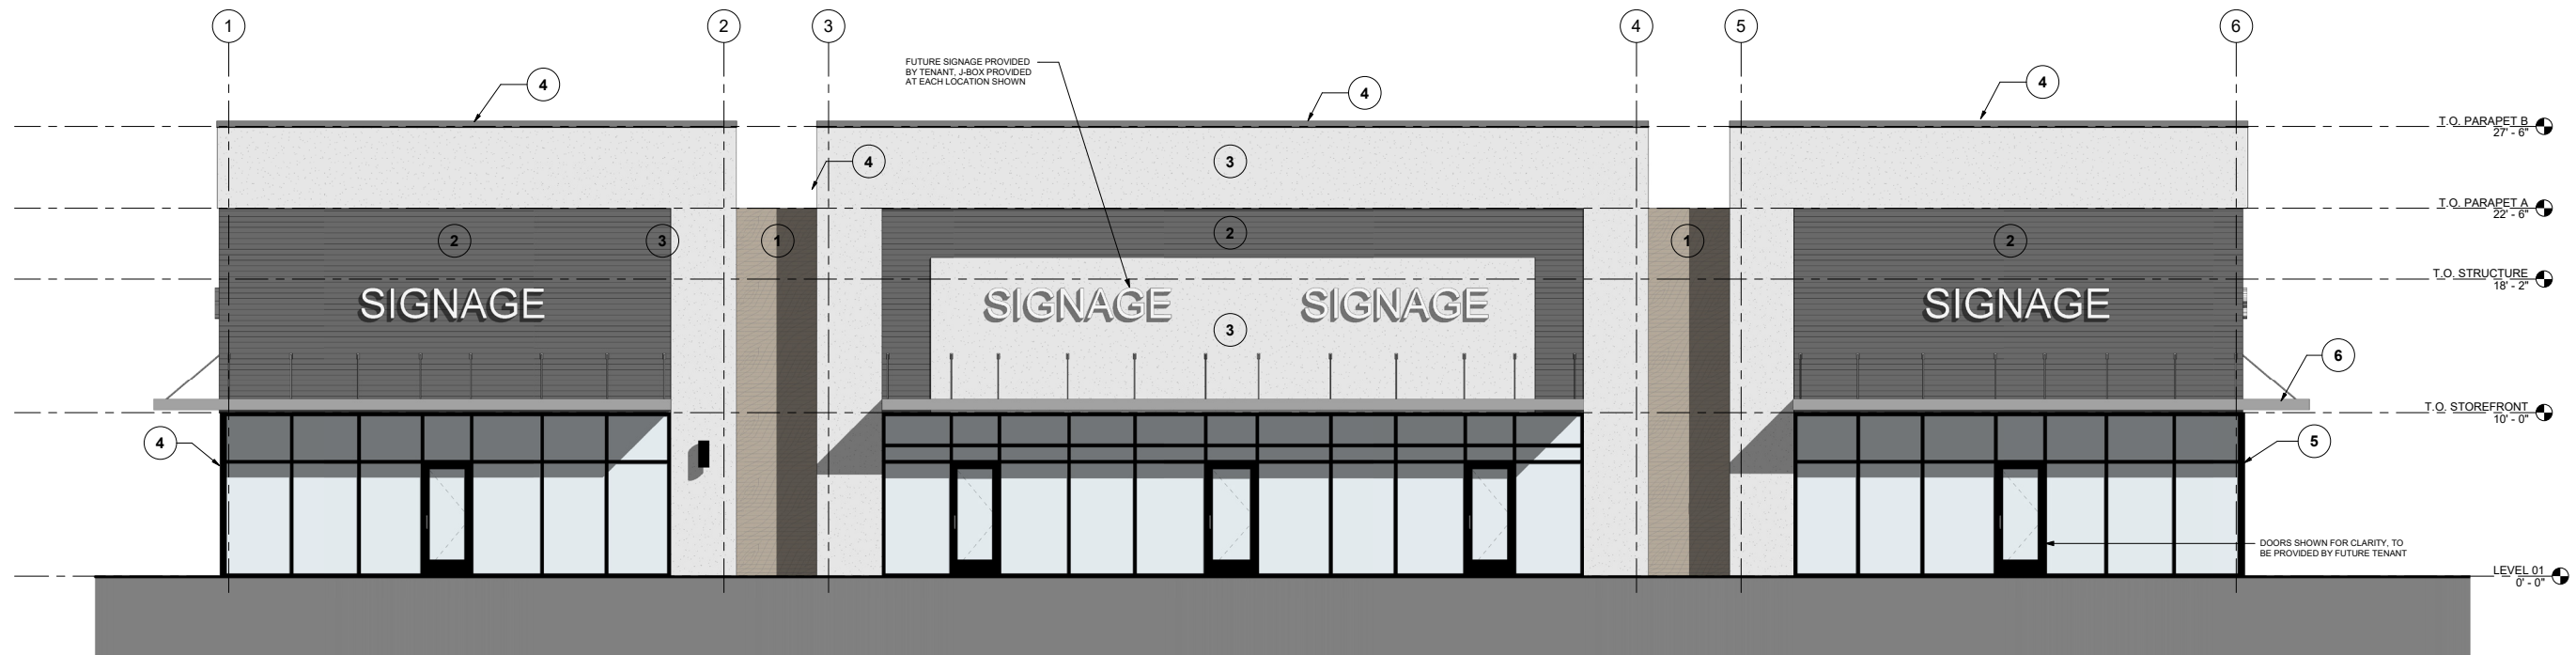

③ DESIGN SIGN OFF - SOUTH ELEVATION
1/4" = 1'-0"

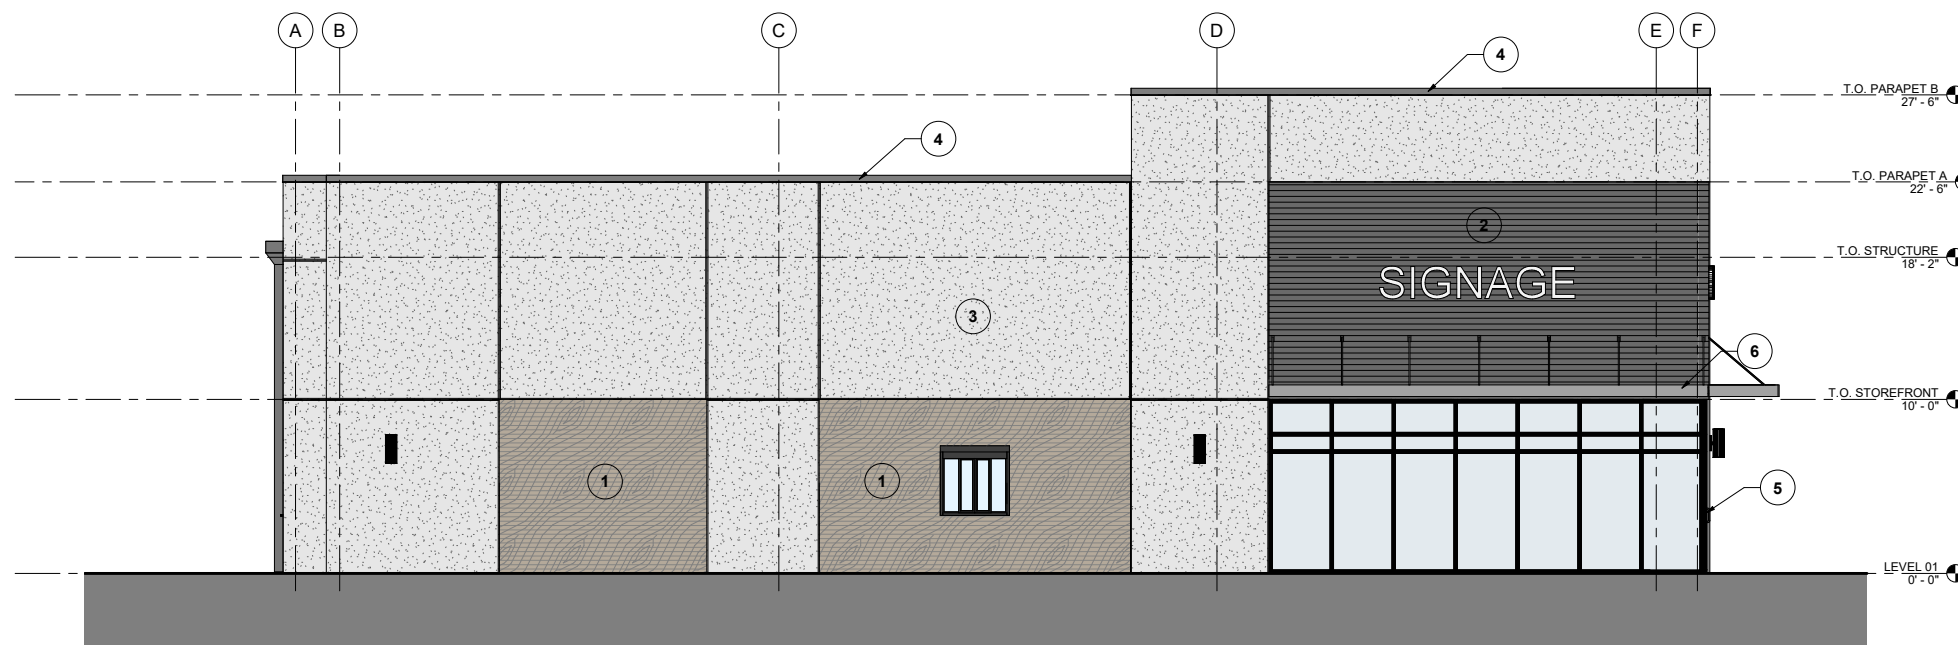


③ DESIGN SIGN OFF - WEST ELEVATION
1/4" = 1'-0"

EXTERIOR ELEVATION MATERIAL CALCULATION					
ELEVATION	ARCH METAL	LAP SIDING	EIFS	GLAZING	TOTAL
NORTH	457 SF = 17%	638 SF = 23%	1665 SF = 60%	0 SF = 0%	2760 SF
SOUTH	225 SF = 7%	879 SF = 26%	1288 SF = 38%	985 SF = 29%	3377 SF
EAST	300 SF = 15%	317 SF = 16%	1151 SF = 56%	253 SF = 13%	2021 SF
WEST	284 SF = 14%	317 SF = 16%	1151 SF = 56%	269 SF = 14%	2021 SF
TOTAL	1266 SF = 12%	2151 SF = 21%	5255 SF = 52%	1507 SF = 15%	10,179 SF

LEGEND	
①	MAC METAL PANEL BOD: SMOKED BIRCH
②	LAP SIDING BOD: HARDIE PLANK LAP SIDING SMOOTH COLOR: NIGHT GRAY
③	EIFS W/ FIBERGLASS MESH BOD: CREAM
④	PREFINISHED COPING CAPS
⑤	STOREFRONT SYSTEM, BLACK ANODIZED
⑥	PREFINISHED METAL CANOPY

FLOOR PLAN

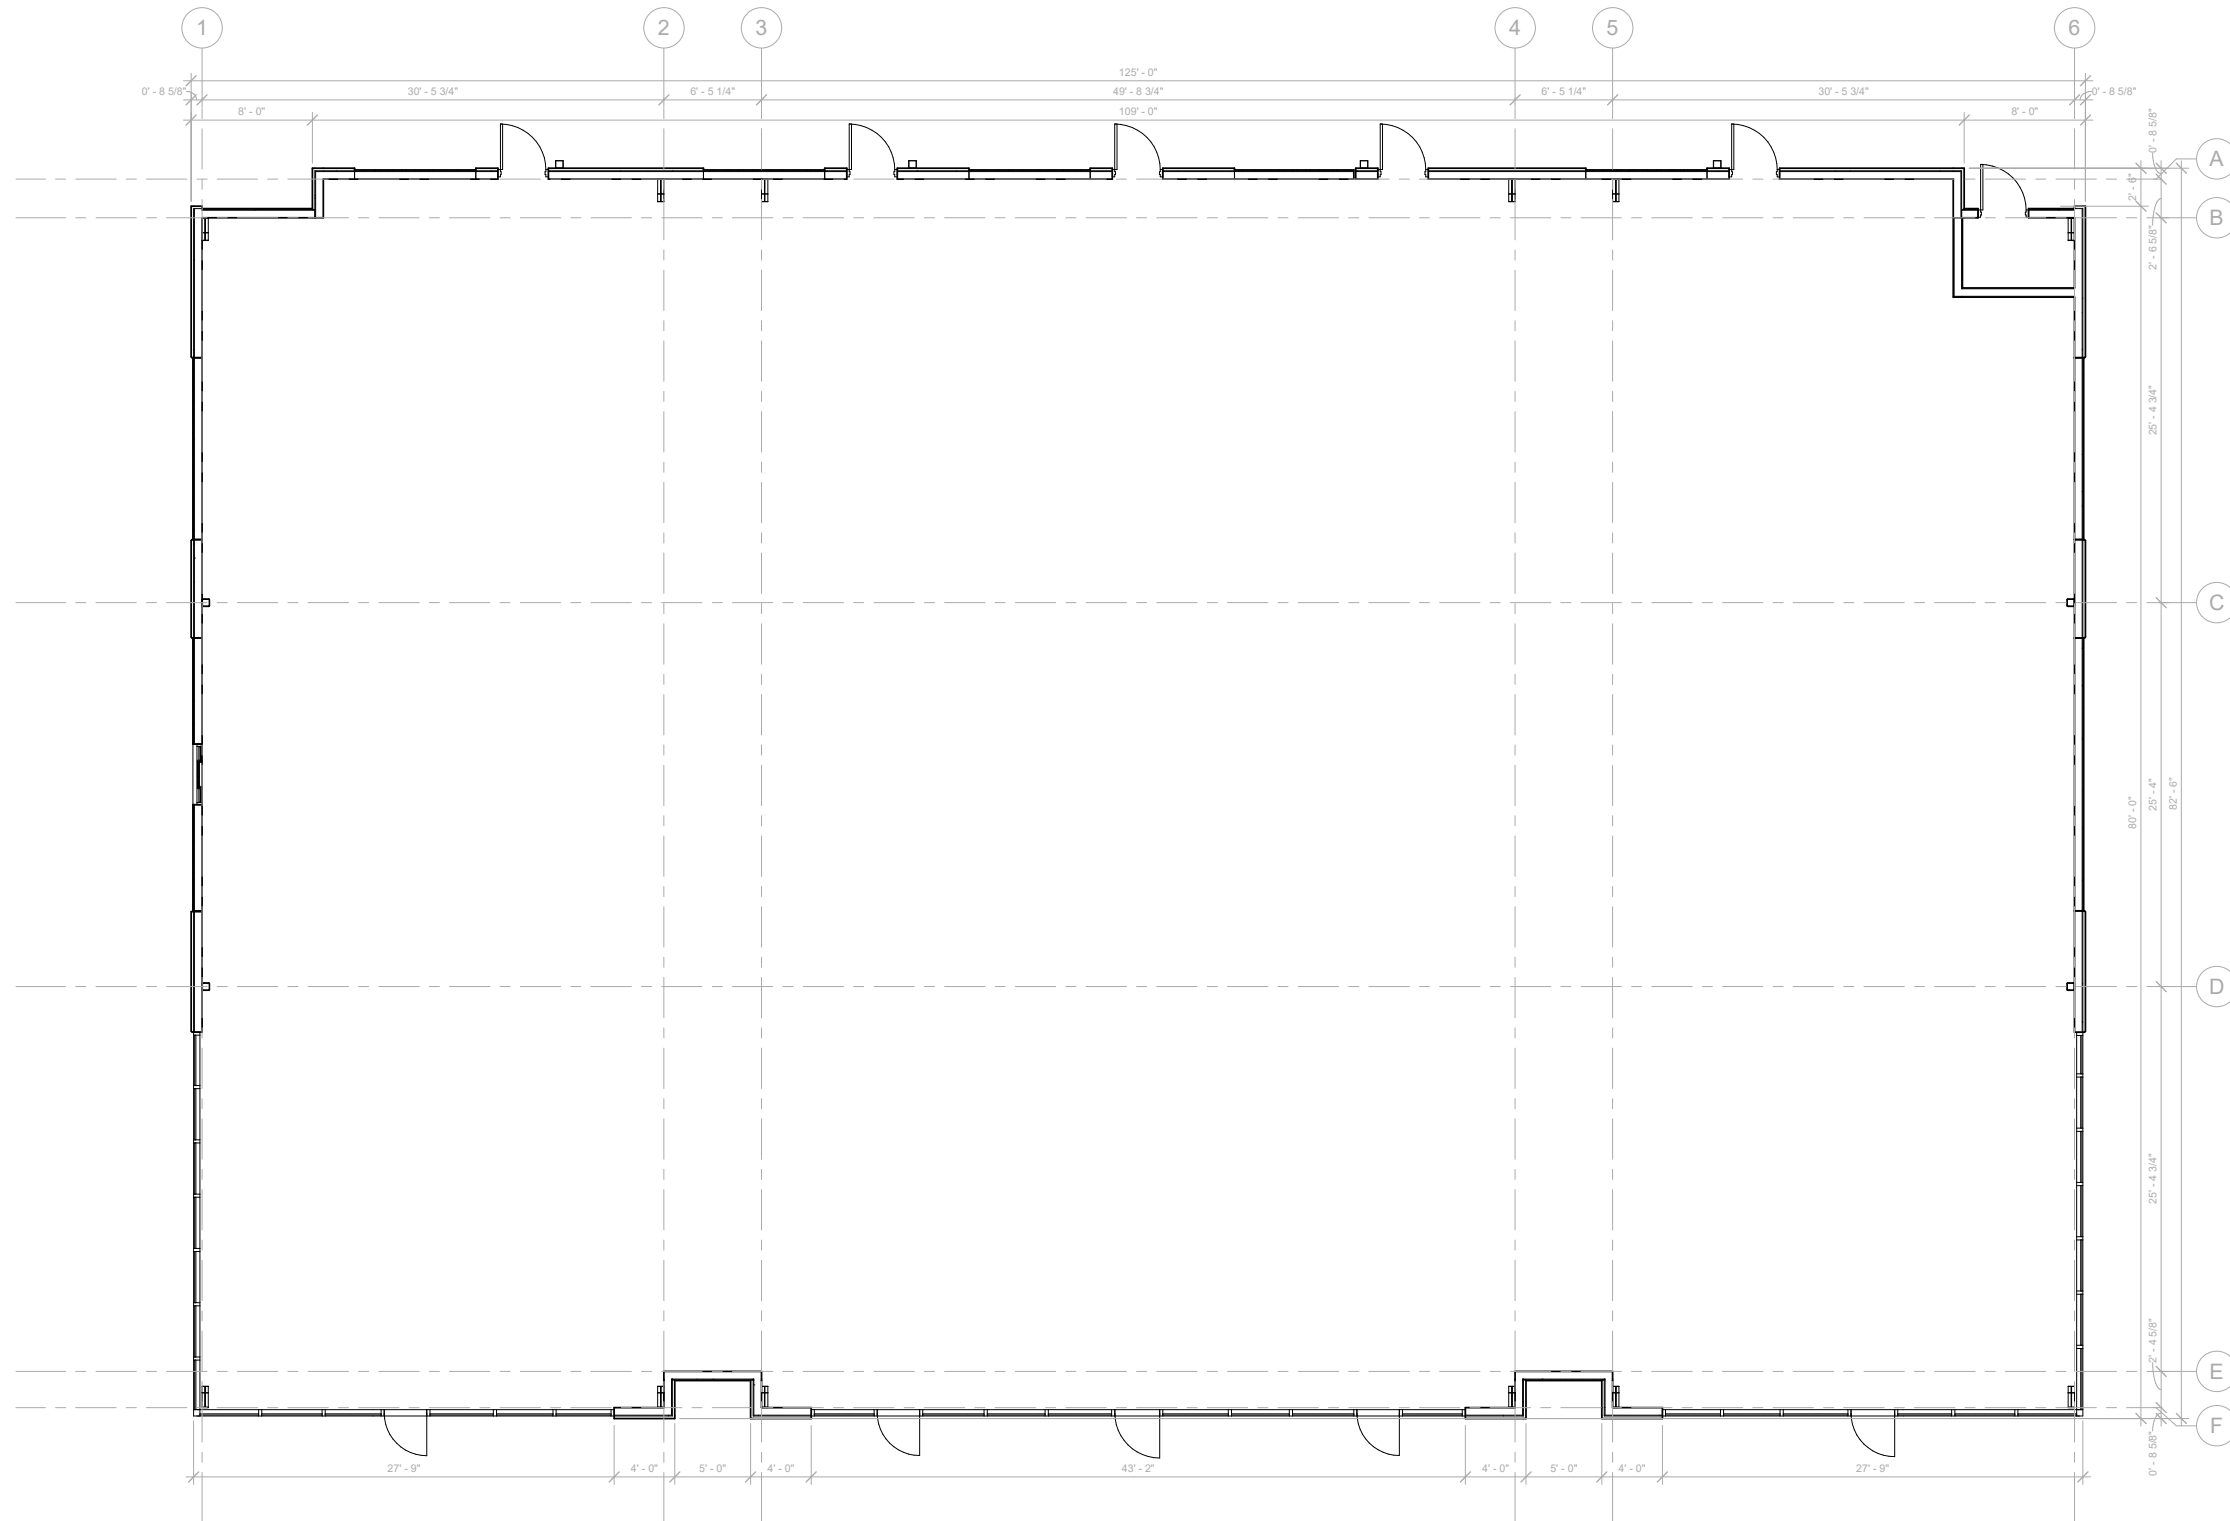

DUWEST ROCKWALL - DESIGN SIGN-OFF

ROCKWALL, TX

modus architecture

THIS DRAWING IS CONCEPTUAL AND SHOULD ONLY BE USED AS AN INFORMATIVE REFERENCE. ALL DIMENSIONS, UTILITY EASEMENTS, SETBACKS, LOT PROPERTY LINES, GRADING, AND SITE REQUIREMENTS SHOULD BE VERIFIED FOR ACCURACY BY OWNER AND/OR OWNER'S SURVEYOR AND CIVIL ENGINEER. PARTICULAR CONSIDERATION SHOULD BE GIVEN TO OPEN SPACE REQUIREMENTS, PAVEMENT TYPES, DRIVE ENTRIES, ETC.

DATE:03/18/2022



»» 211 N ERVAY ST, STE 610
DALLAS, TEXAS 75201
modus architecture

CONTACT:

CLEMENTE JAQUEZ, AIA | 214.769.5631 | CLEMENTE@MODUSARCHITECTURE.COM
MIKE MACGREGOR, AIA | 314.302.6864 | MIKE@MODUSARCHITECTURE.COM

PLANT SCHEDULE

CANOPY TREES	QTY	BOTANICAL / COMMON NAME	CAL	SIZE
	29	ULMUS CRASSIFOLIA CEDAR ELM	4" CAL.	16'-18" HT
	36	QUERCUS POLYMORPHA MEXICAN WHITE OAK	4" CAL MIN	14'-16" HT
	29	QUERCUS VIRGINIANA LIVE OAK	4" CAL MIN	14'-16" HT
ACCENT TREES	QTY	BOTANICAL / COMMON NAME	CAL	SIZE
	6	LAGERSTROEMIA INDICA CRAPE MYRTLE 3-5 STEMS, UPRIGHT	2" CAL MIN	8' -10' HT
	70	ILEX VOMITORIA YAUPON HOLLY	2" CAL MIN	8' -10' HT
SHRUBS	QTY	BOTANICAL / COMMON NAME	CONT	
	84	HESPERALOE PARVIFLORA RED YUCCA	3 GAL	
	60	ILEX CORNUTA 'DWF. BURFORD' DWARF BURFORD HOLLY	5 GAL	
	27	LANTANA X 'NEW GOLD' NEW GOLD LANTANA	3 GAL	
	93	MYRTUS COMMUNIS 'DON'S DWARF' DON'S DWARF WAX MYRTLE	5 GAL	
GROUND COVER	QTY	BOTANICAL / COMMON NAME	CONT	
	61,845 SF	CYNODON 'TIFWAY 419' TIFWAY 419 BERMUDA GRASS	SOD	

NOTE: THE DEVELOPER SHALL ESTABLISH GRASS AND MAINTAIN THE SODDED AREA, INCLUDING WATERING, UNTIL A PERMANENT STAND OF GRASS IS OBTAINED AT WHICH TIME THE PROJECT WILL BE ACCEPTED BY THE CITY. A STAND OF GRASS SHALL CONSIST OF 75%-80% COVERAGE AND A MINIMUM OF 1" IN HEIGHT AS DETERMINED BY THE CITY.

GENERAL GRADING AND PLANTING NOTES

- BY SUBMITTING A PROPOSAL FOR THE LANDSCAPE PLANTING SCOPE OF WORK, THE CONTRACTOR CONFIRMS THAT HE HAS READ, AND WILL COMPLY WITH, THE ASSOCIATED NOTES, SPECIFICATIONS, AND DETAILS WITH THIS PROJECT.
- THE GENERAL CONTRACTOR IS RESPONSIBLE FOR REMOVING ALL EXISTING VEGETATION (EXCEPT WHERE NOTED TO REMAIN).
- IN THE CONTEXT OF THESE PLANS, NOTES, AND SPECIFICATIONS, "FINISH GRADE" REFERS TO THE FINAL ELEVATION OF THE SOIL SURFACE (NOT TOP OF MULCH) AS INDICATED ON THE GRADING PLANS.
 - BEFORE STARTING WORK, THE LANDSCAPE CONTRACTOR SHALL VERIFY THAT THE ROUGH GRADES OF ALL LANDSCAPE AREAS ARE WITHIN ±0.1' OF FINISH GRADE. SEE SPECIFICATIONS FOR MORE DETAILED INSTRUCTION ON TURF AREA AND PLANTING BED PREPARATION.
 - CONSTRUCT AND MAINTAIN FINISH GRADES AS SHOWN ON GRADING PLANS, AND CONSTRUCT AND MAINTAIN SLOPES AS RECOMMENDED BY THE GEOTECHNICAL REPORT. ALL LANDSCAPE AREAS SHALL HAVE POSITIVE DRAINAGE AWAY FROM STRUCTURE AT THE MINIMUM SLOPE SPECIFIED IN THE REPORT AND ON THE GRADING PLANS, AND AREAS OF POTENTIAL PONDING SHALL BE REGRADED TO BLEND IN WITH THE SURROUNDING GRADES AND ELIMINATE PONDING POTENTIAL.
 - THE LANDSCAPE CONTRACTOR SHALL DETERMINE WHETHER OR NOT THE EXPORT OF ANY SOIL WILL BE NEEDED, TAKING INTO ACCOUNT THE ROUGH GRADE PROVIDED, THE AMOUNT OF SOIL AMENDMENTS TO BE ADDED (BASED ON A SOIL TEST, PER SPECIFICATIONS), AND THE FINISH GRADES TO BE ESTABLISHED.
 - ENSURE THAT THE FINISH GRADE IN SHRUB AREAS IMMEDIATELY ADJACENT TO WALKS AND OTHER WALKING SURFACES, AFTER INSTALLING SOIL AMENDMENTS, IS 3" BELOW THE ADJACENT FINISH SURFACE, IN ORDER TO ALLOW FOR PROPER MULCH DEPTH. TAPER THE SOIL SURFACE TO MEET FINISH GRADE, AS SPECIFIED ON THE GRADING PLANS, AT APPROXIMATELY 18" AWAY FROM THE WALKS.
 - ENSURE THAT THE FINISH GRADE IN TURF AREAS IMMEDIATELY ADJACENT TO WALKS AND OTHER WALKING SURFACES, AFTER INSTALLING SOIL AMENDMENTS, IS 1" BELOW THE FINISH SURFACE OF THE WALKS. TAPER THE SOIL SURFACE TO MEET FINISH GRADE, AS SPECIFIED ON THE GRADING PLANS, AT APPROXIMATELY 18" AWAY FROM THE WALKS.
 - SHOULD ANY CONFLICTS AND/OR DISCREPANCIES ARISE BETWEEN THE GRADING PLANS, GEOTECHNICAL REPORT, THESE NOTES AND PLANS, AND ACTUAL CONDITIONS, THE CONTRACTOR SHALL IMMEDIATELY BRING SUCH ITEMS TO THE ATTENTION OF THE LANDSCAPE ARCHITECT, GENERAL CONTRACTOR, AND OWNER.
- ALL PLANT LOCATIONS ARE DIAGRAMMATIC. ACTUAL LOCATIONS SHALL BE VERIFIED WITH THE LANDSCAPE ARCHITECT OR DESIGNER PRIOR TO PLANTING. THE LANDSCAPE CONTRACTOR SHALL ENSURE THAT ALL REQUIREMENTS OF THE PERMITTING AUTHORITY ARE MET (I.E., MINIMUM PLANT QUANTITIES, PLANTING METHODS, TREE PROTECTION METHODS, ETC.).
 - THE LANDSCAPE CONTRACTOR IS RESPONSIBLE FOR DETERMINING PLANT QUANTITIES. PLANT QUANTITIES SHOWN ON LEGENDS AND CALLOUTS ARE FOR GENERAL INFORMATION ONLY. IN THE EVENT OF A DISCREPANCY BETWEEN THE PLAN AND THE PLANT LEGEND, THE PLANT QUANTITY AS SHOWN ON THE PLAN (FOR INDIVIDUAL SYMBOLS) OR CALLOUT (FOR GROUNDCOVER PATTERNS) SHALL TAKE PRECEDENCE.
 - NO SUBSTITUTIONS OF PLANT MATERIALS SHALL BE ALLOWED WITHOUT THE WRITTEN PERMISSION OF THE LANDSCAPE ARCHITECT. IF SOME OF THE PLANTS ARE NOT AVAILABLE, THE LANDSCAPE CONTRACTOR SHALL NOTIFY THE LANDSCAPE ARCHITECT IN WRITING (VIA PROPER CHANNELS).
 - THE CONTRACTOR SHALL, AT A MINIMUM, PROVIDE REPRESENTATIVE PHOTOS OF ALL PLANTS PROPOSED FOR THE PROJECT. THE CONTRACTOR SHALL ALLOW THE LANDSCAPE ARCHITECT AND THE OWNER/OWNER'S REPRESENTATIVE TO INSPECT, AND APPROVE OR REJECT, ALL PLANTS DELIVERED TO THE JOBSITE. REFER TO SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS FOR SUBMITTALS.
- THE CONTRACTOR SHALL MAINTAIN THE LANDSCAPE IN A HEALTHY CONDITION FOR 90 DAYS AFTER ACCEPTANCE BY THE OWNER. REFER TO SPECIFICATIONS FOR CONDITIONS OF ACCEPTANCE FOR THE START OF THE MAINTENANCE PERIOD, AND FOR FINAL ACCEPTANCE AT THE END OF THE MAINTENANCE PERIOD.
- SEE SPECIFICATIONS AND DETAILS FOR FURTHER REQUIREMENTS.

LANDSCAPE STANDARDS

05.01 LANDSCAPE BUFFERS - NON-RESIDENTIAL REQ. ABUTTING A PUBLIC RIGHT-OF-WAY:	10' WIDE LANDSCAPE BUFFER W/ GROUND COVER, BERM, AND SHRUBBERY 30" HIGH + 1 CANOPY TREE & 1 ACCENT TREE PER 50 LIN. FEET OF FRONTAGE
E. QUAIL RUN RD.: ±149' STREET FRONTAGE	10' WIDE BUFFER REQ. W/ 1 CANOPY + 1 ACCENT TREE PER 50 LIN. FT. OF FRONTAGE; GROUND COVER, BUILT-UP BERM AND SHRUBBERY ALONG ENTIRE FRONTAGE
PROVIDED 10' BUFFER:	2 EXIST. CANOPY TREES + 1 NEW CANOPY TREE 3 ACCENT TREES W/ BERM AND SHRUBS
05.02 LANDSCAPE SCREENING REQ. HEADLIGHT SCREENING	HEAD-IN PARKING ADJ. TO STREET SHALL INCORP. MIN. 2' BERM W/ MATURE EVERGREEN SHRUBS ALONG ENTIRE PARKING AREAS
PROVIDED SCREENING	TEXAS SAGE SHRUBS PROVIDED IN FRONT OF PARKING SPACES LOCATED ALONG STREET FRONTAGES
SCREENING FROM RESIDENTIAL	WROUGHT IRON FENCE W/ 3-TIERED SCREEN OF CANOPY TREES & 2 ROWS OF EVERGREEN ACCENT TREES
05.03 LANDSCAPE REQUIREMENTS - COMMERCIAL (C) DISTRICT	
TOTAL SITE AREA:	±192,080 SF
LANDSCAPE AREA REQUIRED TOTAL SITE:	38,416 SF (20%)
LANDSCAPE PROVIDED, TOTAL SITE:	± 76,804 SF (40%)
LOCATION OF LANDSCAPING:	MIN. 50% OF REQ. LANDSCAPING SHALL BE LOCATED IN THE FRONT OF & ALONG THE SIDE OF BUILDINGS W/ STREET FRONTAGE.
MIN. SIZE OF AREAS	ALL REQ. LANDSCAPING SHALL BE NO LESS THAN 5' WIDE AND A MIN. OF 25 SF IN AREA
DETENTION BASINS	NONE PROPOSED
PARKING LOT LANDSCAPING	MIN. 5% OR 200 SF OF LANDSCAPING, WHICHEVER IS GREATER, IN THE INTERIOR OF PARKING LOT AREA.
PROPOSED PARKING AREA:	±5,011 SF
PROPOSED PARKING LOT LANDSCAPING:	±9,968 SF (9.9%) REQ. PARKING SPACES MUST BE WITHIN 80' OF A CANOPY TREE TRUNK

ROOT BARRIERS

THE CONTRACTOR SHALL INSTALL ROOT BARRIERS NEAR ALL NEWLY-PLANTED TREES THAT ARE LOCATED WITHIN FIVE (5) FEET OF PAVING OR CURBS. ROOT BARRIERS SHALL BE "CENTURY" OR "DEEP-ROOT" 24" DEEP PANELS (OR EQUAL). BARRIERS SHALL BE LOCATED IMMEDIATELY ADJACENT TO HARDSCAPE. INSTALL PANELS PER MANUFACTURER'S RECOMMENDATIONS. UNDER NO CIRCUMSTANCES SHALL THE CONTRACTOR USE ROOT BARRIERS OF A TYPE THAT COMPLETELY ENIRCLE THE ROOTBALL.


AFTER ALL PLANTING IS COMPLETE, CONTRACTOR SHALL INSTALL 3" THICK LAYER OF 1-1/2" SHREDDED WOOD MULCH, NATURAL (UNDYED), IN ALL PLANTING AREAS (EXCEPT FOR MULCHESSED AREAS). CONTRACTOR SHALL SUBMIT SAMPLES OF ALL MULCHES TO LANDSCAPE ARCHITECT AND OWNER FOR APPROVAL PRIOR TO CONSTRUCTION. ABSOLUTELY NO EXPOSED GROUND SHALL BE LEFT SHOWING ANYWHERE ON THE PROJECT AFTER MULCH HAS BEEN INSTALLED (SUBJECT TO THE CONDITIONS AND REQUIREMENTS OF THE "GENERAL GRADING AND PLANTING NOTES" AND SPECIFICATIONS).

IRRIGATION CONCEPT

- AN AUTOMATIC IRRIGATION SYSTEM SHALL BE INSTALLED AND OPERATIONAL BY THE TIME OF FINAL INSPECTION. THE ENTIRE IRRIGATION SYSTEM SHALL BE INSTALLED BY A LICENSED AND QUALIFIED IRRIGATION CONTRACTOR.
- THE IRRIGATION SYSTEM WILL OPERATE ON POTABLE WATER, AND THE SYSTEM WILL HAVE APPROPRIATE BACKFLOW PREVENTION DEVICES INSTALLED TO PREVENT CONTAMINATION OF THE POTABLE SOURCE.
- ALL NON-TURF PLANTED AREAS SHALL BE DRIP IRRIGATED. SODDED AND SEEDED AREAS SHALL BE IRRIGATED WITH SPRAY OR ROTOR HEADS AT 100% HEAD-TO-HEAD COVERAGE.
- ALL PLANTS SHARING SIMILAR HYDROZONE CHARACTERISTICS SHALL BE PLACED ON A VALVE DEDICATED TO PROVIDE THE NECESSARY WATER REQUIREMENTS SPECIFIC TO THAT HYDROZONE.
- THE IRRIGATION SYSTEM SHALL BE DESIGNED AND INSTALLED, TO THE MAXIMUM EXTENT POSSIBLE, TO CONSERVE WATER BY USING THE FOLLOWING DEVICES AND SYSTEMS: MATCHED PRECIPITATION RATE TECHNOLOGY ON ROTOR AND SPRAY HEADS (WHEREVER POSSIBLE), RAIN SENSORS, AND MULTI-PROGRAM COMPUTERIZED IRRIGATION CONTROLLERS FEATURING SENSORY INPUT CAPABILITIES.

TREE MITIGATION SUMMARY

TOTAL MITIGATION REQUIRED:	466"
MITIGATION PROVIDED BY PLANTING (94" 4" CALIPER TREES ONSITE):	376"
MITIGATION PROVIDED BY PURCHASING PRESERVATION CREDITS (20% OF TOTAL):	93.2"
(93.2" x \$200 = \$18,640 PAYMENT INTO THE CITY'S TREE FUND)	
TOTAL MITIGATION PROVIDED:	469.2"

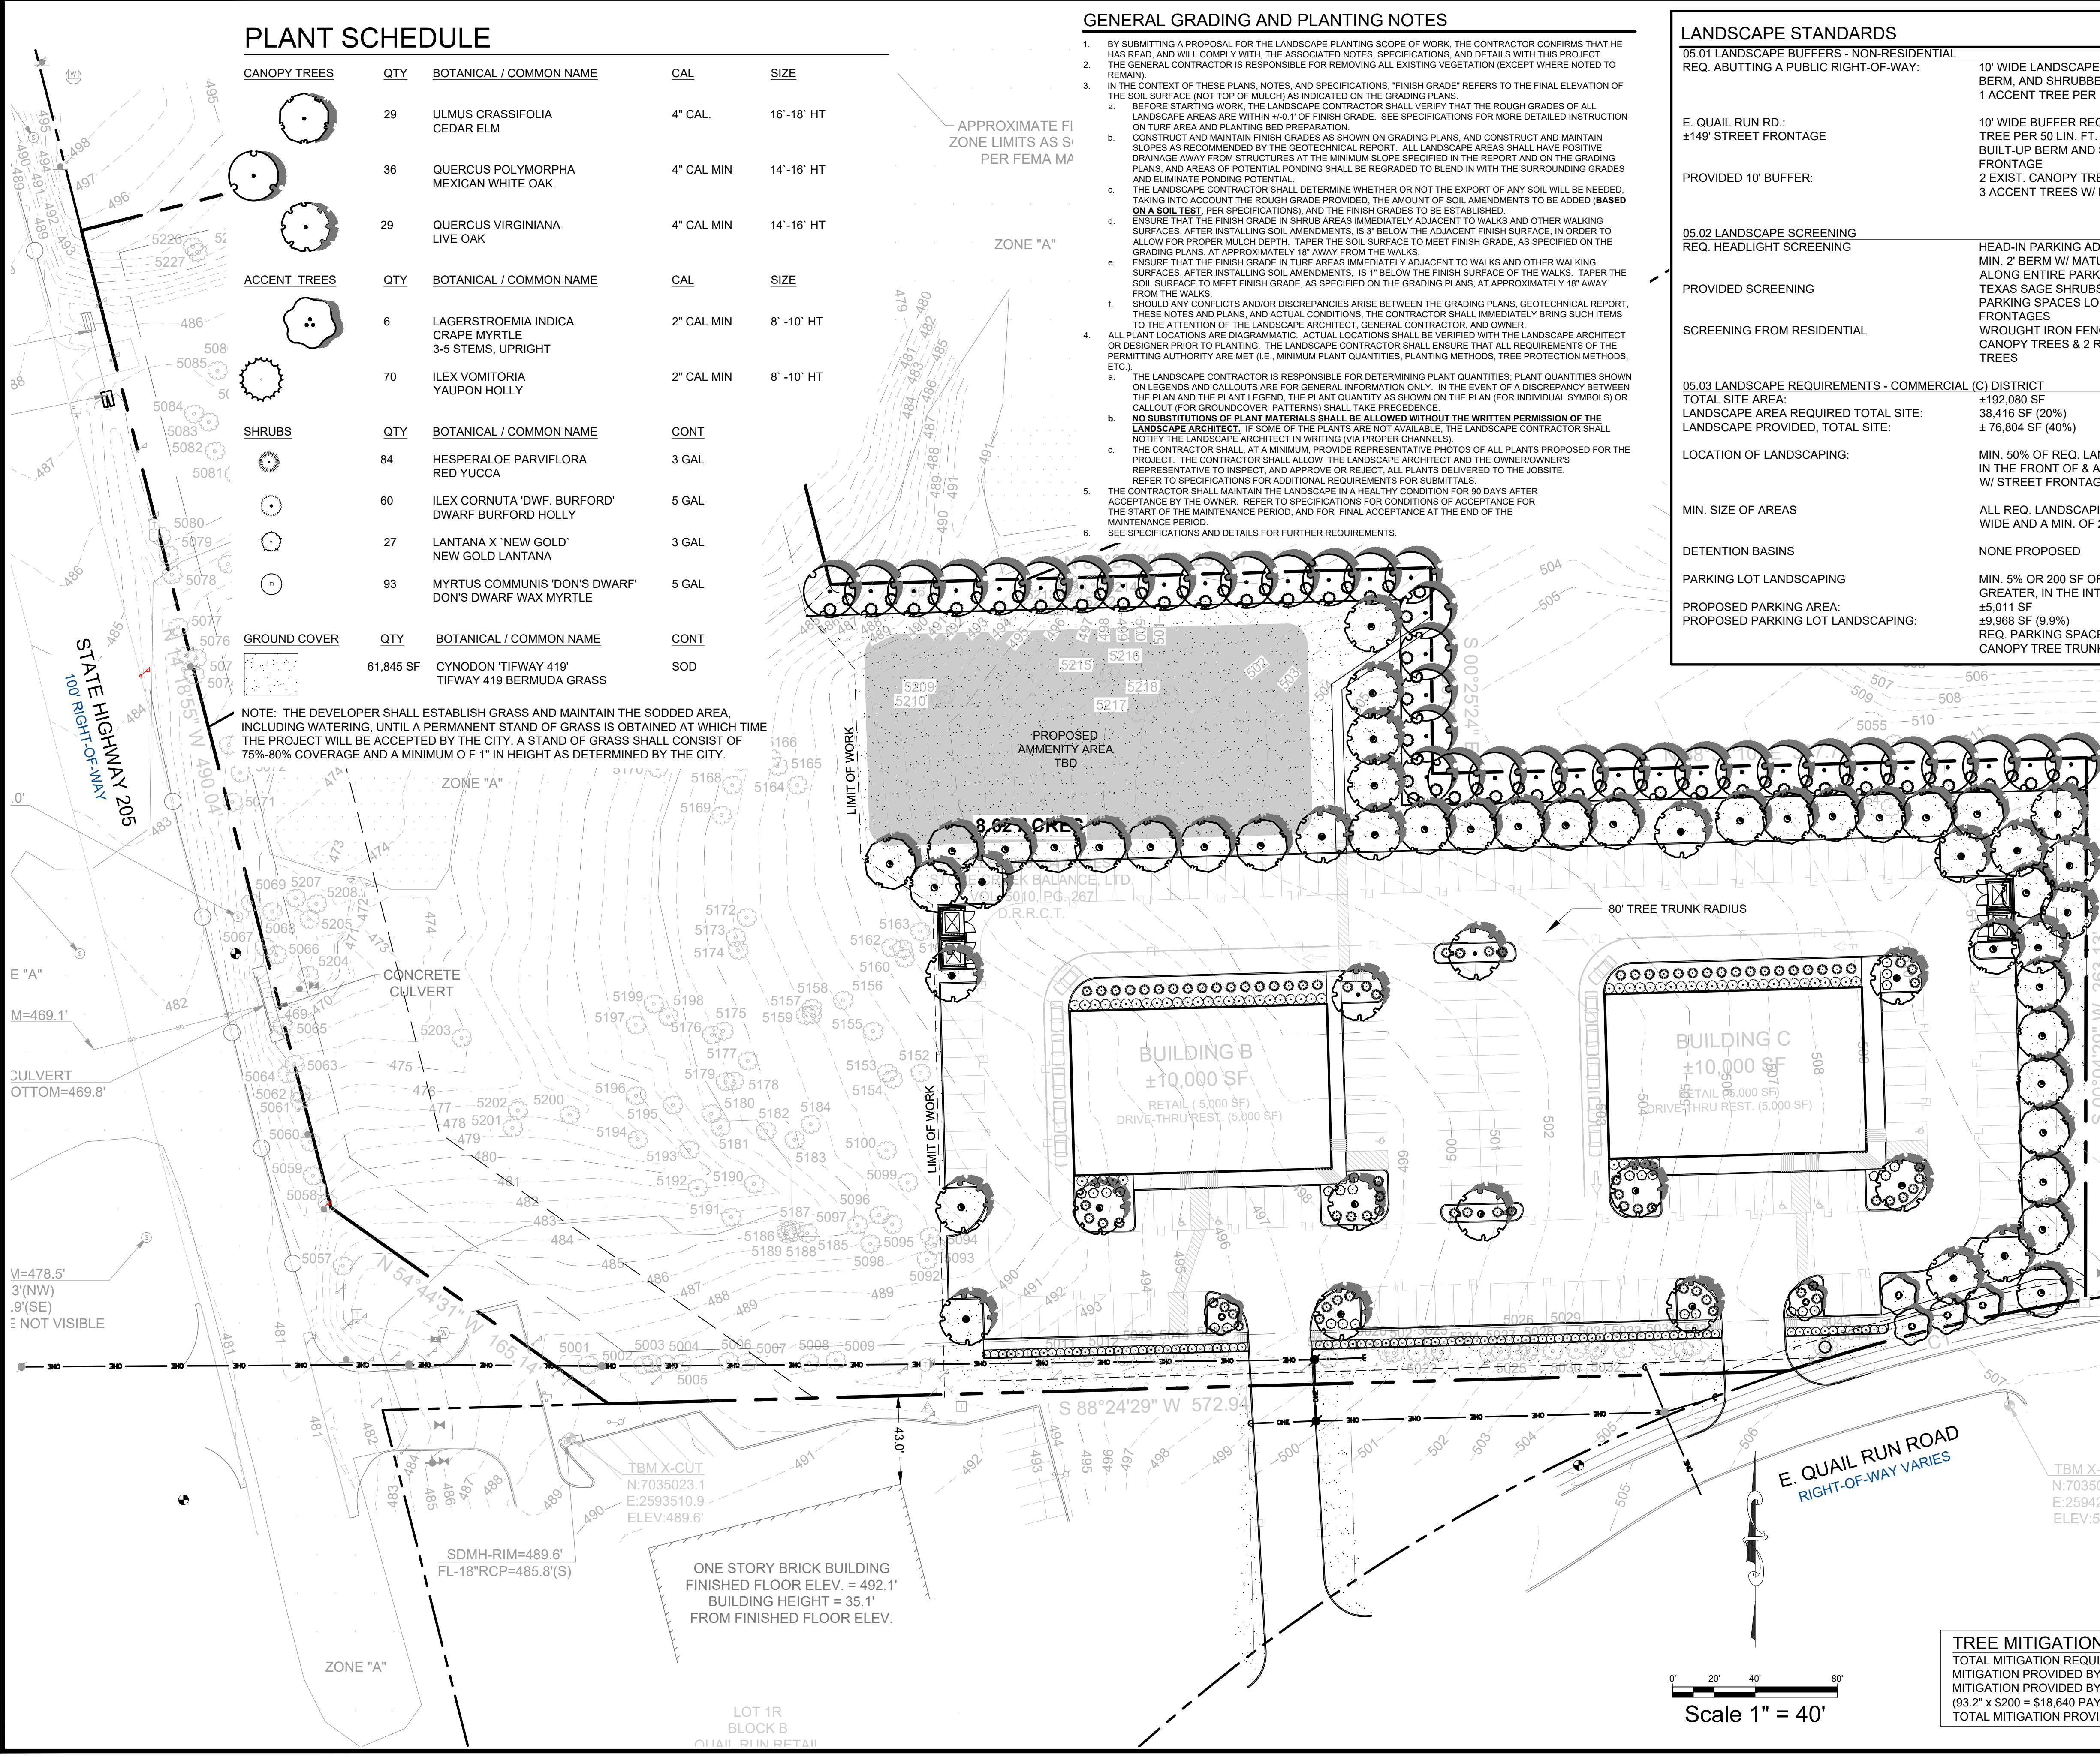

EVERGREEN DESIGN GROUP
(800) 680-6630
15455 Dallas Pkwy., Ste 600
Addicks, TX 75001
www.EvergreenDesignGroup.com

REGISTERED LANDSCAPE ARCHITECT
STATE OF TEXAS
3423
03/17/2022

TEXAS REGISTRATION #141199
GLAY MOORE ENGINEERING
1900 CENTRAL DR., SUITE 400E
ROCKWALL, TX 75087
PHONE: 972.981.9272
WWW.GLMENGINEERING.COM

PRELIMINARY
FOR REVIEW ONLY
Not for construction purposes.
CLAYMOORE ENGINEERING
ENGINEERING AND PLANNING
CONSULTANTS
DREW DOKOSKY
E: 125651 Date: 3/17/2022

**DUWEST ROCKWALL
SH 205 & QUAIL RUN RD
ROCKWALL, TX**

LANDSCAPE PLANTING PLAN

DESIGN: LRR
DRAWN: LRR
CHECKED: CLC
DATE: 03/17/2022
SHEET
LP-1
File No. 2020-021

PLOTTED BY: DARCYLE BRANDON
PLOT DATE: 3/17/2022 11:44 AM
LOCATION: C:\USERS\DARCYLE\DOCUMENTS\UDBLA_PROJECTS\2022\EDG\DUWEST - ROCKWALL_LP.DWG
LAST SAVED: 3/17/2022 11:43 AM

PLANTING SPECIFICATIONS

GENERAL

- A. QUALIFICATIONS OF LANDSCAPE CONTRACTOR**
- ALL LANDSCAPE WORK SHOWN ON THESE PLANS SHALL BE PERFORMED BY A SINGLE FIRM SPECIALIZING IN LANDSCAPE PLANTING.
 - A LIST OF SUCCESSFULLY COMPLETED PROJECTS OF THIS TYPE, SIZE AND NATURE MAY BE REQUESTED BY THE OWNER FOR FURTHER QUALIFICATION MEASURES.
 - THE LANDSCAPE CONTRACTOR SHALL HOLD A VALID NURSERY AND FLORAL CERTIFICATE ISSUED BY THE TEXAS DEPARTMENT OF AGRICULTURE, AS WELL AS OPERATIONAL PESTICIDE APPLICATOR LICENSE ISSUED BY EITHER THE TEXAS DEPARTMENT OF AGRICULTURE OR THE TEXAS STRUCTURAL PEST CONTROL BOARD.
- B. SCOPE OF WORK**
- WORK COVERED BY THESE SECTIONS INCLUDES THE FURNISHING AND PAYMENT OF ALL MATERIALS, LABOR, SERVICES, EQUIPMENT, LICENSES, TAXES AND ANY OTHER ITEMS THAT ARE NECESSARY FOR THE EXECUTION, INSTALLATION AND COMPLETION OF ALL WORK, SPECIFIED HEREIN AND / OR SHOWN ON THE LANDSCAPE PLANS, NOTES, AND DETAILS.
 - ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH ALL APPLICABLE LAWS, CODES AND REGULATIONS REQUIRED BY AUTHORITIES HAVING JURISDICTION OVER SUCH WORK, INCLUDING ALL INSPECTIONS AND PERMITS REQUIRED BY FEDERAL, STATE AND LOCAL AUTHORITIES IN SUPPLY, TRANSPORTATION AND INSTALLATION OF MATERIALS.
 - THE LANDSCAPE CONTRACTOR SHALL VERIFY THE LOCATION OF ALL UNDERGROUND UTILITY LINES (WATER, SEWER, ELECTRICAL, TELEPHONE, GAS, CABLE, TELEVISION, ETC.) PRIOR TO THE START OF ANY WORK.




PRODUCTS

- A. ALL MANUFACTURED PRODUCTS SHALL BE NEW**
- B. CONTAINER AND BALLED PLANTS**
- FURNISH NURSERY-GROWN PLANTS COMPLYING WITH ANSI Z60.1-2014. PROVIDE WELL-SHAPED, FULLY BRANCHED, HEALTHY, VIGOROUS STOCK FREE OF DISEASE, INSECTS, EGGS, LARVAE, AND DEFECTS SUCH AS KNOTS, SUN SCALD, INJURIES, ABRASIONS, AND DISFIGUREMENT. ALL PLANTS WITH A SPECIES SHALL HAVE SIMILAR SIZE AND SHALL BE OF A FORM TYPICAL FOR THE SPECIES. ALL TREES SHALL BE OBTAINED FROM SOURCES WITHIN 200 MILES OF THE PROJECT SITE, AND WITH SIMILAR CLIMATIC CONDITIONS.
 - ROOT SYSTEMS SHALL BE HEALTHY, DENSELY BRANCHED ROOT SYSTEMS, NON-POT-BOUND, FREE FROM ENCIRCLING AND/OR GIRDLING ROOTS, AND FREE FROM ANY OTHER ROOT DEFECTS (SUCH AS J-SHAPED ROOTS).
 - TREES MAY BE PLANTED FROM CONTAINERS OR BALLED-AND-BURLAPPED (B&B), UNLESS SPECIFIED ON THE PLANTING LEGEND. BARE-ROOT TREES ARE NOT ACCEPTABLE.
 - ANY PLANT DEEMED UNACCEPTABLE BY THE LANDSCAPE ARCHITECT OR OWNER SHALL BE IMMEDIATELY REMOVED FROM THE SITE AND SHALL BE REPLACED WITH AN ACCEPTABLE PLANT OF LIKE TYPE AND SIZE AT THE CONTRACTOR'S OWN EXPENSE. ANY PLANTS APPEARING TO BE UNHEALTHY, EVEN IF DETERMINED TO STILL BE ALIVE, SHALL NOT BE ACCEPTED. THE LANDSCAPE ARCHITECT AND OWNER SHALL BE THE SOLE JUDGES AS TO THE ACCEPTABILITY OF PLANT MATERIAL.
 - ALL TREES SHALL BE STANDARD IN FORM, UNLESS OTHERWISE SPECIFIED. TREES WITH CENTRAL LEADERS WILL NOT BE ACCEPTED IF LEADER IS DAMAGED OR REMOVED. PRUNE ALL DAMAGED TWIGS AFTER PLANTING.
 - CALIPER MEASUREMENTS FOR STANDARD (SINGLE TRUNK) TREES SHALL BE AS FOLLOWS: SIX INCHES ABOVE THE ROOT FLARE FOR TREES UP TO AND INCLUDING FOUR INCHES IN CALIPER, AND TWELVE INCHES ABOVE THE ROOT FLARE FOR TREES EXCEEDING FOUR INCHES IN CALIPER.
 - MULTI-TRUNK TREES SHALL BE MEASURED BY THEIR OVERALL HEIGHT, MEASURED FROM THE TOP OF THE ROOT BALL, WHERE CALIPER MEASUREMENTS ARE USED, THE CALIPER SHALL BE CALCULATED AS ONE-HALF OF THE CALIPER OF THE THREE LARGEST TRUNKS.
 - ANY TREE OR SHRUB SHOWN TO HAVE EXCESS SOIL PLACED ON TOP OF THE ROOT BALL, SO THAT THE ROOT FLARE HAS BEEN COMPLETELY COVERED, SHALL BE REJECTED.
- C. SOD:** PROVIDE WELL-ROOTED SOD OF THE VARIETY NOTED ON THE PLANS. SOD SHALL BE CUT FROM HEALTHY, MATURE TURF WITH ST. THICKNESS OF 3/4" TO 1". EACH PALLET OF SOD SHALL BE ACCOMPANIED BY A CERTIFICATE FROM SUPPLIER STATING THE COMPOSITION OF THE SOD.
- D. TOPSOIL:** SANDY TO CLAY LOAM TOPSOIL, FREE OF STONES LARGER THAN 1/2" INCH, FOREIGN MATTER, PLANTS, ROOTS, AND SEEDS.
- E. COMPOST:** WELL-COMPOSTED, STABLE, AND WEED-FREE ORGANIC MATTER, pH RANGE OF 5.5 TO 8; MOISTURE CONTENT 35 TO 55 PERCENT BY WEIGHT; 100 PERCENT PASSING THROUGH 3/4-INCH SIEVE; SOLUBLE SALT CONTENT OF 5 TO 10 DECIGRAMS/M; NOT EXCEEDING 0.5 PERCENT INERT CONTAMINANTS AND FREE OF SUBSTANCES TOXIC TO PLANTINGS; NO MANURE OR ANIMAL-BASED PRODUCTS SHALL BE USED.
- F. FERTILIZER:** GRANULAR FERTILIZER CONSISTING OF NITROGEN, PHOSPHORUS, POTASSIUM, AND OTHER NUTRIENTS IN PROPORTIONS, AMOUNTS, AND RELEASE RATES RECOMMENDED IN A SOIL REPORT FROM A QUALIFIED SOIL TESTING AGENCY (SEE BELOW).
- G. MULCH:** SIZE AND TYPE AS INDICATED ON PLANS, FREE FROM DELETERIOUS MATERIALS AND SUITABLE AS A TOP DRESSING OF TREES AND SHRUBS.
- H. TREE STAKING AND GUYING**
- STAKES: 6" LONG GREEN METAL T-POSTS.
 - GUY AND TIE WIRE: ASTM A 641, CLASS 1, GALVANIZED-STEEL WIRE, 2-STRAND, TWISTED, 0.106 INCH DIAMETER.
 - STRAP CHAINING GUARD: REINFORCED NYLON OR CANVAS AT LEAST 1-1/2 INCH WIDE, WITH GROMMETS TO PROTECT TREE TRUNKS FROM DAMAGE.
- I. STEEL EDGING:** PROFESSIONAL STEEL EDGING, 1/4" GAUGE THICK X 4 INCHES WIDE, FACTORY PAINTED DARK GREEN. ACCEPTABLE MANUFACTURERS INCLUDE COL-MET OR APPROVED EQUAL.
- J. PRE-EMERGENT HERBICIDES:** ANY GRANULAR, NON-STAINING PRE-EMERGENT HERBICIDE THAT IS LABELED FOR THE SPECIFIC ORNAMENTALS OR TURF ON WHICH IT WILL BE UTILIZED. PRE-EMERGENT HERBICIDES SHALL BE APPLIED PER THE MANUFACTURER'S LABELED RATES.



METHODS

- A. SOIL PREPARATION**
- BEFORE STARTING WORK, THE LANDSCAPE CONTRACTOR SHALL VERIFY THAT THE GRADE OF ALL LANDSCAPE AREAS ARE WITHIN +/-0.1' OF FINISH GRADE. THE CONTRACTOR SHALL NOTIFY THE OWNER IMMEDIATELY SHOULD ANY DISCREPANCIES EXIST.
 - SOIL TESTING:
 - AFTER FINISH GRADES HAVE BEEN ESTABLISHED, CONTRACTOR SHALL HAVE SOIL SAMPLES FROM THE PROJECTS LANDSCAPE AREAS TESTED BY AN ESTABLISHED SOIL TESTING LABORATORY. EACH SAMPLE SUBMITTED TO THE LAB SHALL CONTAIN NO LESS THAN ONE QUART OF SOIL, TAKEN FROM BETWEEN THE SOIL SURFACE AND 6" DEPTH. IF NO SAMPLE LOCATIONS ARE INDICATED ON THE PLANS, THE CONTRACTOR SHALL TAKE A MINIMUM OF THREE SAMPLES FROM VARIOUS REPRESENTATIVE LOCATIONS FOR TESTING.
 - THE CONTRACTOR SHALL HAVE THE SOIL TESTING LABORATORY PROVIDE RESULTS FOR THE FOLLOWING: SOIL TEXTURAL CLASS, GENERAL SOIL FERTILITY, pH, ORGANIC MATTER CONTENT, SALT (CEC), LIME, SODIUM ADSORPTION RATIO (SAR) AND BORON CONTENT.
 - THE CONTRACTOR SHALL ALSO SUBMIT THE PROJECTS PLANT LIST TO THE LABORATORY ALONG WITH THE SOIL SAMPLES.
 - THE SOIL REPORT PRODUCED BY THE LABORATORY SHALL CONTAIN RECOMMENDATIONS FOR THE FOLLOWING (AS APPROPRIATE): SEPARATE SOIL PREPARATION AND BACKFILL MIX RECOMMENDATIONS FOR GENERAL ORNAMENTAL PLANTS, XERIC PLANTS, TURF, AND NATIVE SEED, AS WELL AS PRE-PLANT FERTILIZER APPLICATIONS AND RECOMMENDATIONS FOR ANY OTHER SOIL RELATED ISSUES. THE REPORT SHALL ALSO PROVIDE A FERTILIZER PROGRAM FOR THE ESTABLISHMENT PERIOD AND FOR LONG-TERM MAINTENANCE.
 - THE CONTRACTOR SHALL INSTALL SOIL AMENDMENTS AND FERTILIZERS PER THE SOILS REPORT RECOMMENDATIONS. ANY CHANGE IN COST DUE TO THE SOIL REPORT RECOMMENDATIONS, EITHER INCREASE OR DECREASE, SHALL BE SUBMITTED TO THE OWNER WITH THE REPORT.
 - FOR BIDDING PURPOSES ONLY, THE SOIL PREPARATION SHALL CONSIST OF THE FOLLOWING:
 - TURF: INCORPORATE THE FOLLOWING AMENDMENTS INTO THE TOP 6" OF SOIL BY MEANS OF ROTOTILLING AFTER CROSS-RIPPING:
 - NITROGEN STABILIZED ORGANIC AMENDMENT - 4 CU. YDS. PER 1,000 S.F.
 - PREPLANT TURF FERTILIZER (10-20-10 OR SIMILAR, SLOW RELEASE, ORGANIC) - 15 LBS PER 1,000 S.F.
 - "CLAY BUSTER" OR EQUAL - USE MANUFACTURER'S RECOMMENDED RATE
 - TREES, SHRUBS, AND PERENNIALS: INCORPORATE THE FOLLOWING AMENDMENTS INTO THE TOP 6" OF SOIL BY MEANS OF ROTOTILLING AFTER CROSS-RIPPING:
 - NITROGEN STABILIZED ORGANIC AMENDMENT - 4 CU. YDS. PER 1,000 S.F.
 - 12-12-12 FERTILIZER (OR SIMILAR, ORGANIC, SLOW RELEASE) - 10 LBS. PER CU. YD.
 - "CLAY BUSTER" OR EQUAL - USE MANUFACTURER'S RECOMMENDED RATE
 - IRON SULPHATE - 2 LBS. PER CU. YD.
 - IN THE CONTEXT OF THESE PLANS, NOTES, AND SPECIFICATIONS, "FINISH GRADE" REFERS TO THE FINAL ELEVATION OF THE SOIL SURFACE (NOT TOP OF MULCH) AS INDICATED ON THE GRADING PLANS.
 - BEFORE STAKING WORK, THE LANDSCAPE CONTRACTOR SHALL VERIFY THAT THE ROUGH GRADES OF ALL LANDSCAPE AREAS ARE WITHIN +/-0.1' OF FINISH GRADE. SEE SPECIFICATIONS FOR MORE DETAILED INSTRUCTION ON TURF AREA AND PLANTING BED PREPARATION.
 - CONSTRUCT AND MAINTAIN FINISH GRADES AS SHOWN ON GRADING PLANS, AND CONSTRUCT AND MAINTAIN SLOPES AS RECOMMENDED BY THE GEOTECHNICAL REPORT. ALL LANDSCAPE AREAS SHALL HAVE POSITIVE DRAINAGE AWAY FROM STRUCTURES AT THE MINIMUM SLOPE SPECIFIED IN THE REPORT AND ON THE GRADING PLANS, AND AREAS OF POTENTIAL PONDING SHALL BE REGRADED TO BLEND IN WITH THE SURROUNDING GRADES AND ELIMINATE PONDING POTENTIAL.
 - THE LANDSCAPE CONTRACTOR SHALL DETERMINE WHETHER OR NOT THE EXPORT OF ANY SOIL WILL BE NEEDED, TAKING INTO ACCOUNT THE FINISH GRADE PROVIDED, THE AMOUNT OF SOIL AMENDMENTS TO BE ADDED (BASED ON A SOIL TEST PER SPECIFICATIONS), AND THE FINISH GRADES TO BE ESTABLISHED.
 - ENSURE THAT THE FINISH GRADE IN SHRUB AREAS IMMEDIATELY ADJACENT TO WALKS AND OTHER WALKING SURFACES, AFTER INSTALLING SOIL AMENDMENTS, IS 3" BELOW THE ADJACENT FINISH SURFACE. IN ORDER TO ALLOW FOR PROPER MULCH DEPTH, TAPER THE SOIL SURFACE TO MEET FINISH GRADE, AS SPECIFIED ON THE GRADING PLANS, AT APPROXIMATELY 18" AWAY FROM THE WALKS.
 - ENSURE THAT THE FINISH GRADE IN TURF AREAS IMMEDIATELY ADJACENT TO WALKS AND OTHER WALKING SURFACES, AFTER INSTALLING SOIL AMENDMENTS, IS 1" BELOW THE FINISH SURFACE OF THE WALKS. TAPER THE SOIL SURFACE TO MEET FINISH GRADE, AS SPECIFIED ON THE GRADING PLANS, AT APPROXIMATELY 18" AWAY FROM THE WALKS.
 - SHOULD ANY CONFLICTS AND/OR DISCREPANCIES ARISE BETWEEN THE GRADING PLANS, GEOTECHNICAL REPORT, THESE NOTES AND PLANS, AND ACTUAL CONDITIONS, THE CONTRACTOR SHALL IMMEDIATELY BRING SUCH ITEMS TO THE ATTENTION OF THE LANDSCAPE ARCHITECT, GENERAL CONTRACTOR, AND OWNER.
 - ONCE SOIL PREPARATION IS COMPLETE, THE LANDSCAPE CONTRACTOR SHALL ENSURE THAT THERE ARE NO DEBRIS, TRASH, OR STONES LARGER THAN 1" REMAINING IN THE TOP 6" OF SOIL.


- B. SUBMITTALS**
- THE CONTRACTOR SHALL PROVIDE SUBMITTALS AND SAMPLES, IF REQUIRED, TO THE LANDSCAPE ARCHITECT, AND RECEIVE APPROVAL IN WRITING FOR SUCH SUBMITTALS BEFORE WORK COMMENCES.
 - SUBMITTALS SHALL INCLUDE PHOTOS OF PLANTS WITH A RULER OR MEASURING STICK FOR SCALE. PHOTOS OR SAMPLES OF ANY REQUIRED MULCHES, AND SOIL TEST RESULTS AND PREPARATION RECOMMENDATIONS FROM THE TESTING LAB (INCLUDING COMPOST AND FERTILIZER RATES AND TYPES, AND OTHER AMENDMENTS FOR TREES/SHRUB, TURF, AND SEED AREAS AS MAY BE APPROPRIATE).
 - SUBMITTALS SHALL ALSO INCLUDE MANUFACTURER CUT SHEETS FOR PLANTING ACCESSORIES SUCH AS TREE STAKES AND TIES, EDGING, AND LANDSCAPE FABRICS (IF ANY).
 - WHERE MULTIPLE ITEMS ARE SHOWN ON A PAGE, THE CONTRACTOR SHALL CLEARLY INDICATE THE ITEM BEING CONSIDERED.
- C. GENERAL PLANTING**
- REMOVE ALL NURSERY TAGS AND STAKES FROM PLANTS.
 - EXCEPT IN AREAS TO BE PLANTED WITH ORNAMENTAL GRASSES, APPLY PRE-EMERGENT HERBICIDES AT THE MANUFACTURER'S RECOMMENDED RATE.
 - TRENCHING NEAR EXISTING TREES:
 - CONTRACTOR SHALL NOT DISTURB ROOTS 1-1/2" AND LARGER IN DIAMETER WITHIN THE CRITICAL ROOT ZONE (CRZ) OF EXISTING TREES, AND SHALL EXERCISE ALL POSSIBLE CARE AND PRECAUTIONS TO AVOID INJURY TO TREE ROOTS, TRUNKS, AND BRANCHES. THE CRZ IS DEFINED AS A CIRCULAR AREA EXTENDING OUTWARD FROM THE TREE TRUNK, WITH A RADIUS EQUAL TO 1" FOR EVERY 1" OF TRUNK DIAMETER-AT-BREAST-HEIGHT (4.5' ABOVE THE AVERAGE GRADE AT THE TRUNK).
 - ALL EXCAVATION WITHIN THE CRZ SHALL BE PERFORMED USING HAND TOOLS. NO MACHINE EXCAVATION OR TRENCHING OF ANY KIND SHALL BE ALLOWED WITHIN THE CRZ.
 - ALTER ALIGNMENT OF PIPE TO AVOID TREE ROOTS 1-1/2" AND LARGER IN DIAMETER. WHERE TREE ROOTS 1-1/2" AND LARGER IN DIAMETER ARE ENCOUNTERED IN THE FIELD, TUNNEL UNDER SUCH ROOTS. WRAP EXPOSED ROOTS WITH SEVERAL LAYERS OF BURLAP AND KEEP MOIST. CLOSE ALL TRENCHES WITHIN THE CANOPY DRIP LINES WITHIN 24 HOURS.
 - ALL SEVERED ROOTS SHALL BE HAND PRUNED WITH SHARP TOOLS AND ALLOWED TO AIR-DRY. DO NOT USE ANY SORT OF SEALERS OR WOUND PAINTS.
- D. TREE PLANTING**
- TREE PLANTING HOLES SHALL BE EXCAVATED TO MINIMUM WIDTH OF TWO TIMES THE WIDTH OF THE ROOTBALL, AND TO A DEPTH EQUAL TO THE DEPTH OF THE ROOTBALL LESS TWO TO FOUR INCHES.
 - SCARIFY THE SIDES AND BOTTOM OF THE PLANTING HOLE PRIOR TO THE PLACEMENT OF THE TREE. REMOVE ANY GLAZING THAT MAY HAVE BEEN CAUSED DURING THE EXCAVATION OF THE HOLE.
 - FOR CONTAINER AND BOX TREES, TO REMOVE ANY POTENTIALLY GIRDLING ROOTS AND OTHER ROOT DEFECTS, THE CONTRACTOR SHALL SHAVE A 1" LAYER OFF OF THE SIDES AND BOTTOM OF THE ROOTBALL OF ALL TREES JUST BEFORE PLACING INTO THE PLANTING PIT. DO NOT "TEASE" ROOTS OUT FROM THE ROOTBALL.
 - INSTALL THE TREE ON UNDISTURBED SUBGRADE SO THAT THE TOP OF THE ROOTBALL IS TWO TO FOUR INCHES ABOVE THE SURROUNDING GRADE.
 - BACKFILL THE TREE HOLE UTILIZING THE EXISTING TOPSOIL FROM ON-SITE. ROCKS LARGER THAN 1" DIA. AND ALL OTHER DEBRIS SHALL BE REMOVED FROM THE SOIL PRIOR TO THE BACKFILL. SHOULD ADDITIONAL SOIL BE REQUIRED TO BRING TO FINISH GRADE, SOIL SHOULD BE STORED TO PROMOTE IMPORT ADDITIONAL TOPSOIL FROM OFF-SITE AT NO ADDITIONAL COST TO THE OWNER. IMPORTED TOPSOIL SHALL BE OF SIMILAR TEXTURAL CLASS AND COMPOSITION IN THE ON-SITE SOIL.
 - TREES SHALL NOT BE PLANTED UNLESS LOCAL CONDITIONS (SUCH AS HEAVY WINDS OR SLOPES) REQUIRE STAKES TO KEEP TREES UPRIGHT. SHOULD STAKING BE REQUIRED, THE TOTAL NUMBER OF TREE STAKES (BEYOND THE MINIMUMS LISTED BELOW) WILL BE LEFT TO THE LANDSCAPE CONTRACTOR'S DISCRETION. SHOULD ANY TREES FALL OR LEAN, THE LANDSCAPE CONTRACTOR SHALL BRACEN THE TREE, OR REPRUNE IT SHOULD IT BECOME DAMAGED. TREE STAKING SHALL ADHERE TO THE FOLLOWING GUIDELINES:
 - 1"-2" TREES: TWO STAKES PER TREE
 - 2-1/2"-4" TREES: THREE STAKES PER TREE
 - TREES OVER 4" CALIPER: GUY AS NEEDED
 - MULTI-TRUNK TREES: THREE STAKES PER TREE MINIMUM. QUANTITY AND POSITIONS AS NEEDED TO STABILIZE THE TREE
 - MULTI-TRUNK TREES: THREE STAKES PER TREE MINIMUM. QUANTITY AND POSITIONS AS NEEDED TO STABILIZE THE TREE
 - UPON COMPLETION OF PLANTING, CONSTRUCT AN EARTH WATERING BASIN AROUND THE TREE. COVER THE INTERIOR OF THE TREE RING WITH THE WEED BARRIER CLOTH AND TOPDRESS WITH MULCH (TYPE AND DEPTH PER PLANS).
- E. SHRUB, PERENNIAL AND GROUNDCOVER PLANTING**
- DIG THE PLANTING HOLES TWICE AS WIDE AND 2" LESS DEEP THAN EACH PLANTS ROOTBALL. INSTALL THE PLANT IN THE HOLE. BACKFILL AROUND THE PLANT WITH SOIL AMENDED PER SOIL TEST RECOMMENDATIONS.
 - INSTALL THE WEED BARRIER CLOTH, OVERLAPPING IT AT THE ENDS. UTILIZE STEEL STAPLES TO KEEP THE WEED BARRIER CLOTH IN PLACE.
 - WHEN PLANTING IS COMPLETE, APPLY MULCH (TYPE AND DEPTH PER PLANS) OVER ALL PLANTING BEDS, COVERING THE ENTIRE PLANTING AREA.
- F. SODDING**
- SOD VARIETY TO BE AS SPECIFIED ON THE LANDSCAPE PLAN.
 - LAY SOD WITHIN 24 HOURS FROM THE TIME OF STRIPPING. DO NOT LAY IF THE GROUND IS FROZEN.
 - LAY THE SOD TO FORM A SOLID MASS WITH TIGHTLY FITTED JOINTS. BUTT ENDS AND SIDES OF SOD STRIPS - DO NOT OVERLAP. STAGGER STRIPS TO OFFSET JOINTS IN ADJACENT COURSES.
 - ROLL THE SOD TO ENSURE GOOD CONTACT OF THE SOD'S ROOT SYSTEM WITH THE SOIL UNDERNEATH.
 - WATER THE SOD THOROUGHLY WITH A FINE SPRAY IMMEDIATELY AFTER PLANTING TO OBTAIN AT LEAST SIX INCHES OF PENETRATION INTO THE SOIL BELOW THE SOD.
- G. MULCH**
- INSTALL MULCH TOPDRESSING, TYPE AND DEPTH PER MULCH NOTE, IN ALL PLANTING AREAS AND TREE RINGS.
 - DO NOT INSTALL MULCH WITHIN 6" OF TREE ROOT FLARE AND WITHIN 24" OF HABITABLE STRUCTURES, EXCEPT AS MAY BE NOTED ON THESE PLANS. MULCH COVER WITHIN 6" OF CONCRETE WALKS AND CURBS SHALL NOT PROTRUDE ABOVE THE FINISH SURFACE OF THE WALKS AND CURBS. MULCH COVER WITHIN 12" OF WALLS SHALL BE AT LEAST 3" LOWER THAN THE TOP OF WALL.
- H. CLEAN UP**
- DURING LANDSCAPE PREPARATION AND PLANTING, KEEP ALL PAVEMENT CLEAN AND ALL WORK AREAS IN A NEAT, ORDERLY CONDITION.
 - DISPOSED LEGALLY OF ALL EXCAVATED MATERIALS OFF THE PROJECT SITE.
- I. INSPECTION AND ACCEPTANCE**
- UPON COMPLETION OF THE WORK, THE LANDSCAPE CONTRACTOR SHALL PROVIDE THE SITE CLEAN, FREE OF DEBRIS AND TRASH, AND SUITABLE FOR USE AS INTENDED. THE LANDSCAPE CONTRACTOR SHALL THEN REQUEST AN INSPECTION BY THE OWNER TO DETERMINE FINAL ACCEPTABILITY.
 - WHEN THE INSPECTED PLANTING WORK DOES NOT COMPLY WITH THE CONTRACT DOCUMENTS, THE LANDSCAPE CONTRACTOR SHALL REPLACE AND/OR REPAIR THE REJECTED WORK TO THE OWNER'S SATISFACTION WITHIN 24 HOURS.
 - THE LANDSCAPE MAINTENANCE PERIOD WILL NOT COMMENCE UNTIL THE LANDSCAPE WORK HAS BEEN RE-INSPECTED BY THE OWNER AND FOUND TO BE ACCEPTABLE. AT THAT TIME, A WRITTEN NOTICE OF FINAL ACCEPTANCE WILL BE ISSUED BY THE OWNER, AND THE MAINTENANCE AND GUARANTEE PERIODS WILL COMMENCE.
- J. LANDSCAPE MAINTENANCE**
- THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR THE MAINTENANCE OF ALL WORK SHOWN ON THESE PLANS FOR 90 DAYS BEYOND FINAL ACCEPTANCE OF ALL LANDSCAPE WORK BY THE OWNER. LANDSCAPE MAINTENANCE SHALL INCLUDE WEEKLY SITE VISITS FOR THE FOLLOWING ACTIONS (AS APPROPRIATE): PROPER PRUNING, RESTAKING OF TREES, RESETTING OF PLANTS THAT HAVE SETTLED, MOWING AND AERATION OF LAWNS, WEEDING, TREATING FOR INSECTS AND DISEASES, REPLACEMENT OF MULCH, REMOVAL OF LITTER, REPAIRS TO THE IRRIGATION SYSTEM DUE TO FAULTY PARTS AND/OR WORKMANSHIP, AND THE APPROPRIATE WATERING OF ALL PLANTINGS. THE LANDSCAPE CONTRACTOR SHALL MAINTAIN THE IRRIGATION SYSTEM IN PROPER WORKING ORDER, WITH SCHEDULING ADJUSTMENTS BY SEASON TO MAXIMIZE WATER CONSERVATION. SHOULD SEEDS AND/OR SODDED AREAS NOT BE COVERED BY AN AUTOMATIC IRRIGATION SYSTEM, THE LANDSCAPE CONTRACTOR SHALL BE RESPONSIBLE FOR WATERING THESE AREAS AND OBTAINING A FULL, HEALTHY STAND OF PLANTS AT NO ADDITIONAL COST TO THE OWNER.
 - TO ACHIEVE FINAL ACCEPTANCE AT THE END OF THE MAINTENANCE PERIOD, ALL OF THE FOLLOWING CONDITIONS MUST OCCUR:
 - THE LANDSCAPE SHALL SHOW ACTIVE, HEALTHY GROWTH (WITH EXCEPTIONS MADE FOR SEASONAL DORMANCY). ALL PLANTS NOT MEETING THIS CONDITION SHALL BE REJECTED AND REPLACED BY HEALTHY PLANT MATERIAL PRIOR TO FINAL ACCEPTANCE.
 - ALL HARDCAPE SHALL BE CLEANED PRIOR TO FINAL ACCEPTANCE.
 - SODDED AREAS MUST BE ACTIVELY GROWING AND MUST REACH A MINIMUM HEIGHT OF 1/2 INCHES BEFORE FIRST MOWING. BARE AREAS LARGER THAN TWELVE SQUARE INCHES MUST BE RESODDED (AS APPROPRIATE) PRIOR TO FINAL ACCEPTANCE. ALL SODDED TURF SHALL BE NEATLY MOWED.
- K. WARRANTY PERIOD, PLANT GUARANTEE AND REPLACEMENTS**
- THE LANDSCAPE CONTRACTOR SHALL GUARANTEE ALL TREES, SHRUBS, PERENNIALS, SOD, AND IRRIGATION SYSTEMS FOR A PERIOD OF ONE YEAR FROM THE DATE OF THE OWNER'S FINAL ACCEPTANCE (90 DAYS FOR ANNUAL PLANTS). THE CONTRACTOR SHALL REPLACE, AT HIS OWN EXPENSE AND TO THE SATISFACTION OF THE OWNER, ANY PLANTS WHICH DIE IN THAT TIME, OR REPAIR OR REPLACE KNOWN DEFECTS OF THE IRRIGATION SYSTEM IF OPERATED IMPROPERLY.
 - AFTER THE INITIAL MAINTENANCE PERIOD AND DURING THE GUARANTEE PERIOD, THE LANDSCAPE CONTRACTOR SHALL ONLY BE RESPONSIBLE FOR REPLACEMENT OF PLANTS WHEN PLANT DEATH CANNOT BE ATTRIBUTED DIRECTLY TO OVERWATERING OR OTHER DAMAGE BY HUMAN ACTIONS.
 - PROVIDE A MINIMUM OF (2) COPIES OF RECORD DRAWING TO THE OWNER UPON COMPLETION OF WORK. A RECORD DRAWING IS A RECORD OF ALL CHANGES THAT OCCURRED IN THE FIELD AND THAT ARE DOCUMENTED THROUGH CHANGE ORDERS, ADDENDA, OR CONTRACTOR/CONSULTANT DRAWING MARKUPS.

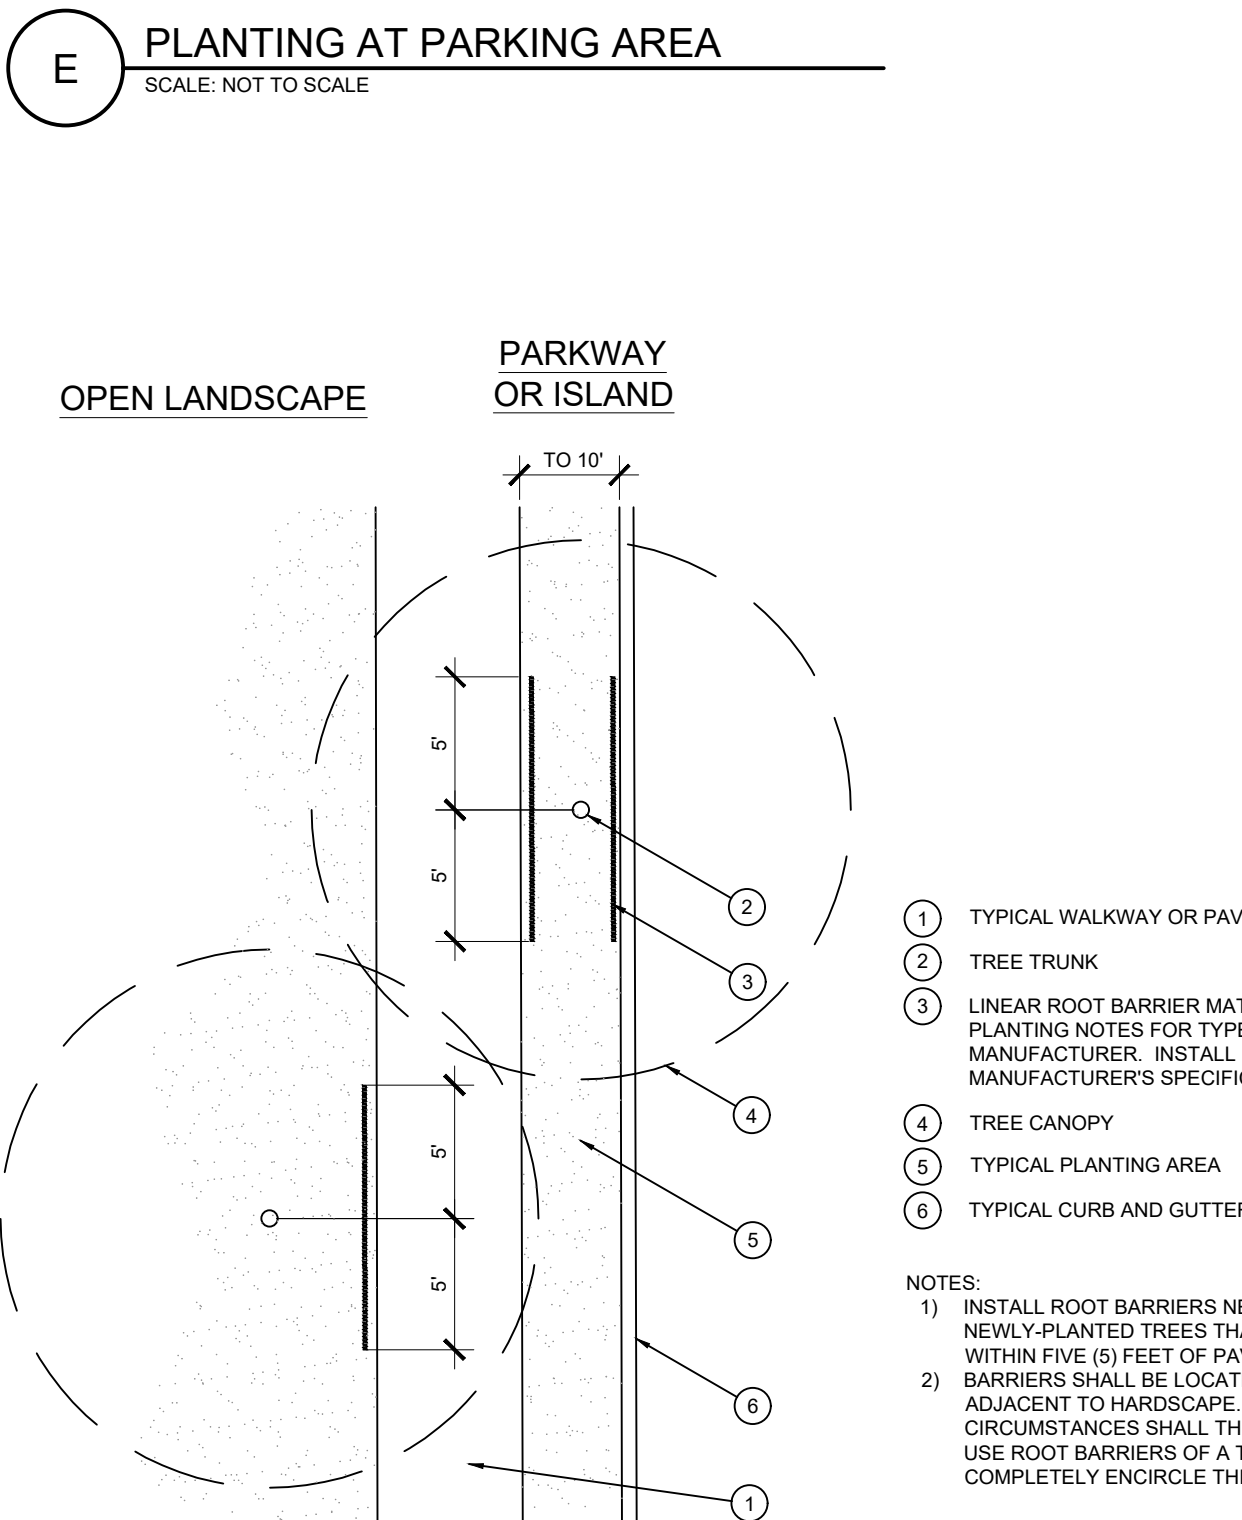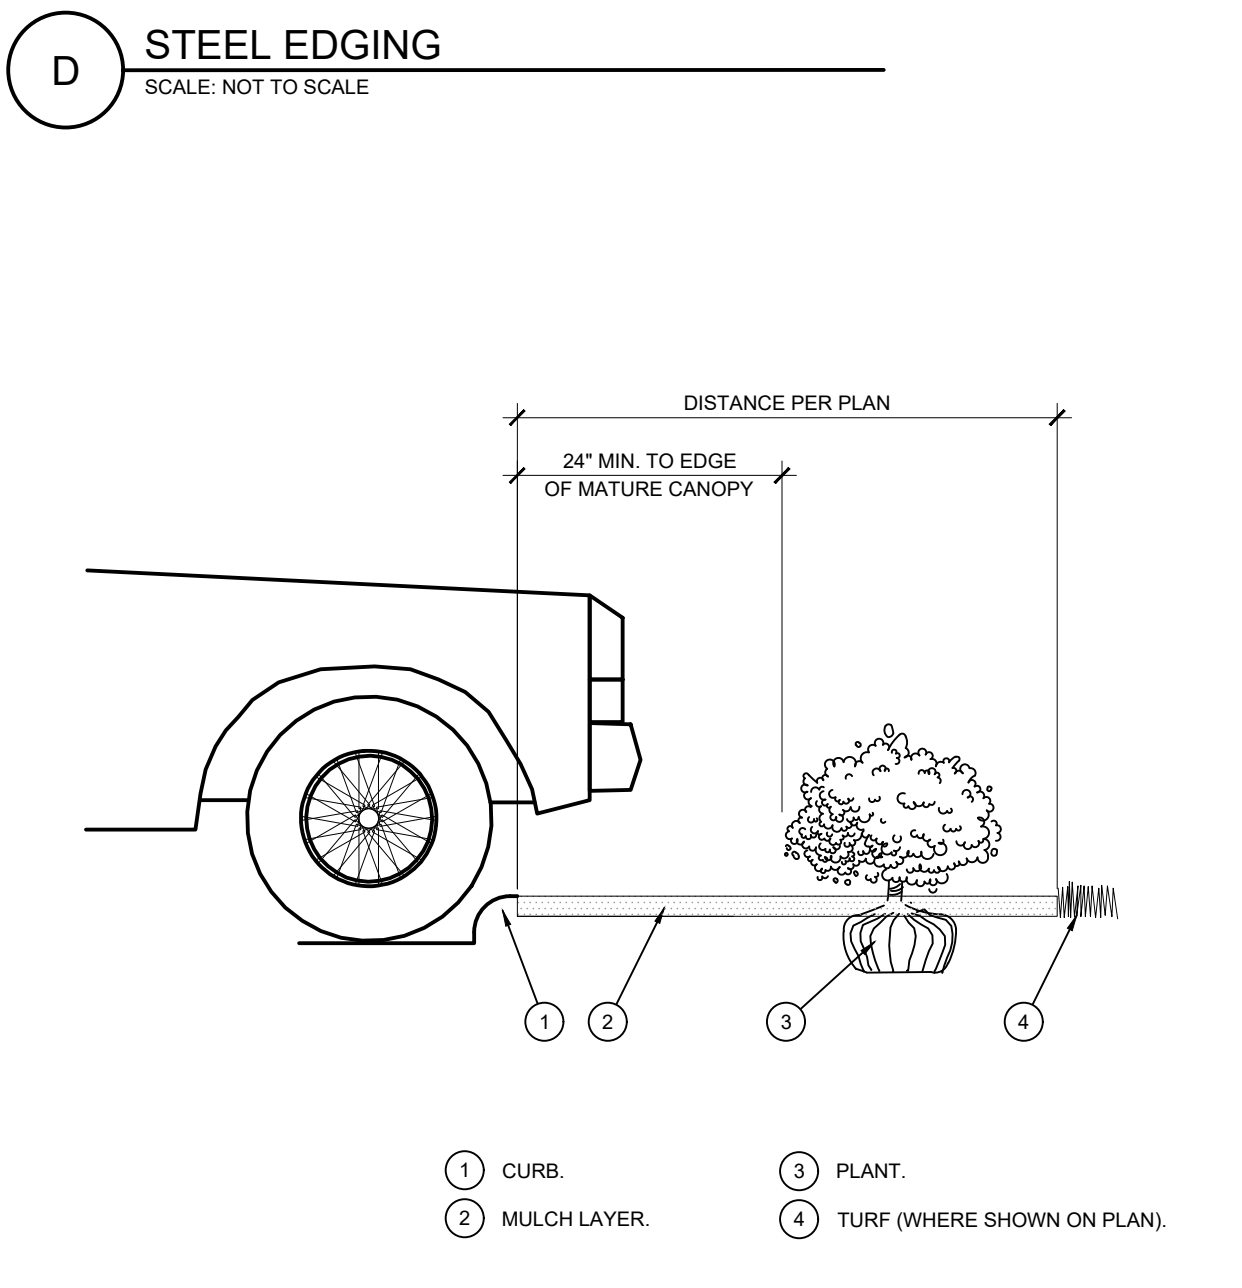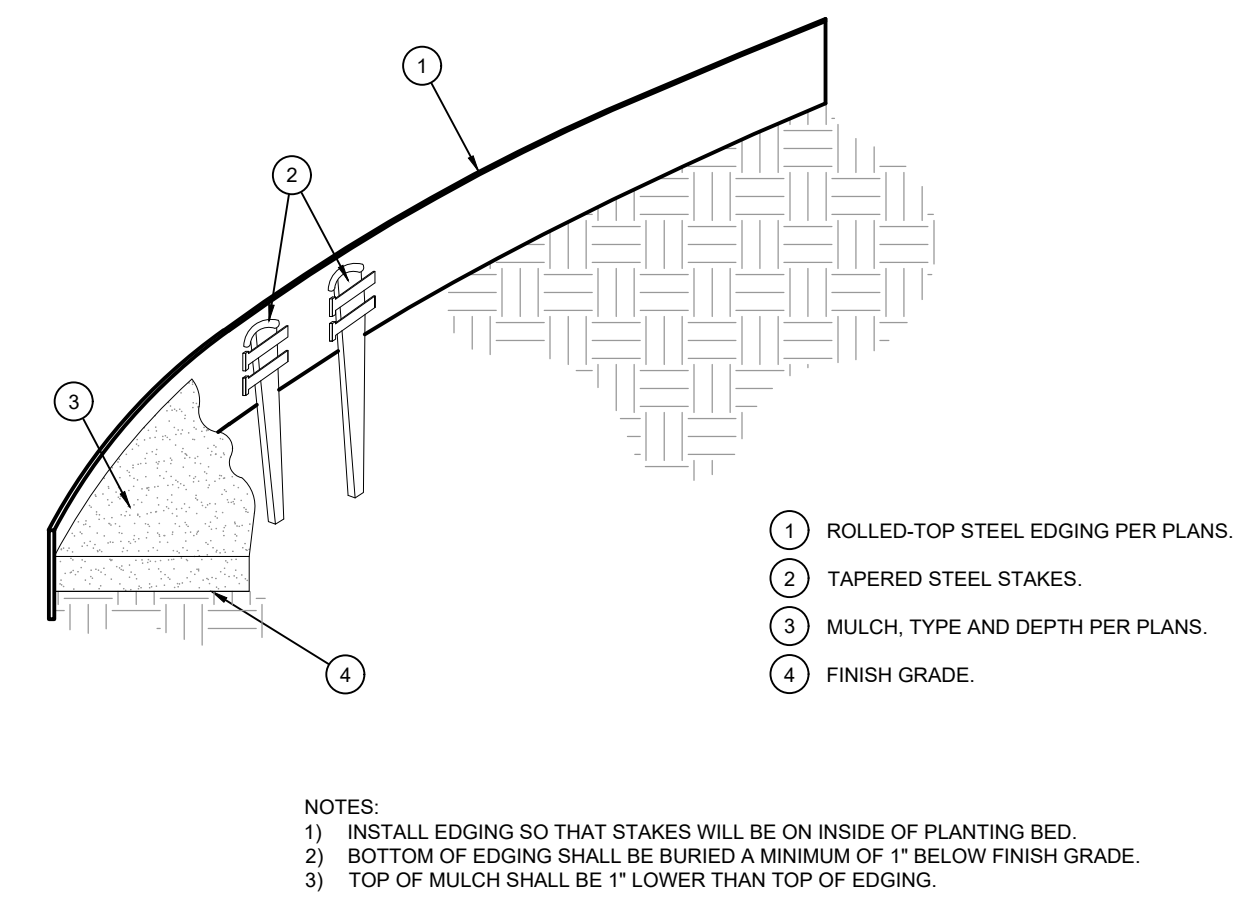

F. ROOT BARRIER - PLAN VIEW
SCALE: NOT TO SCALE

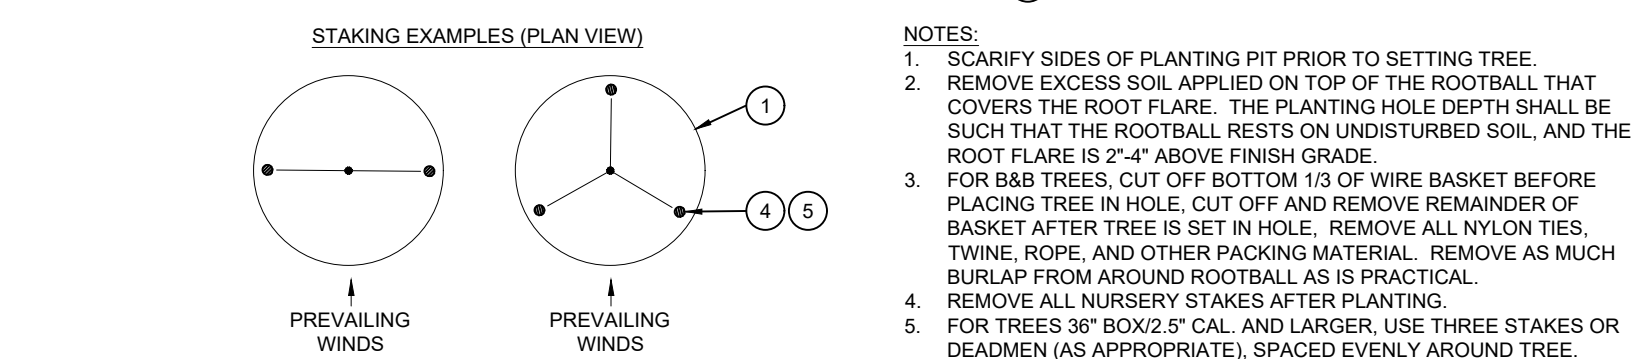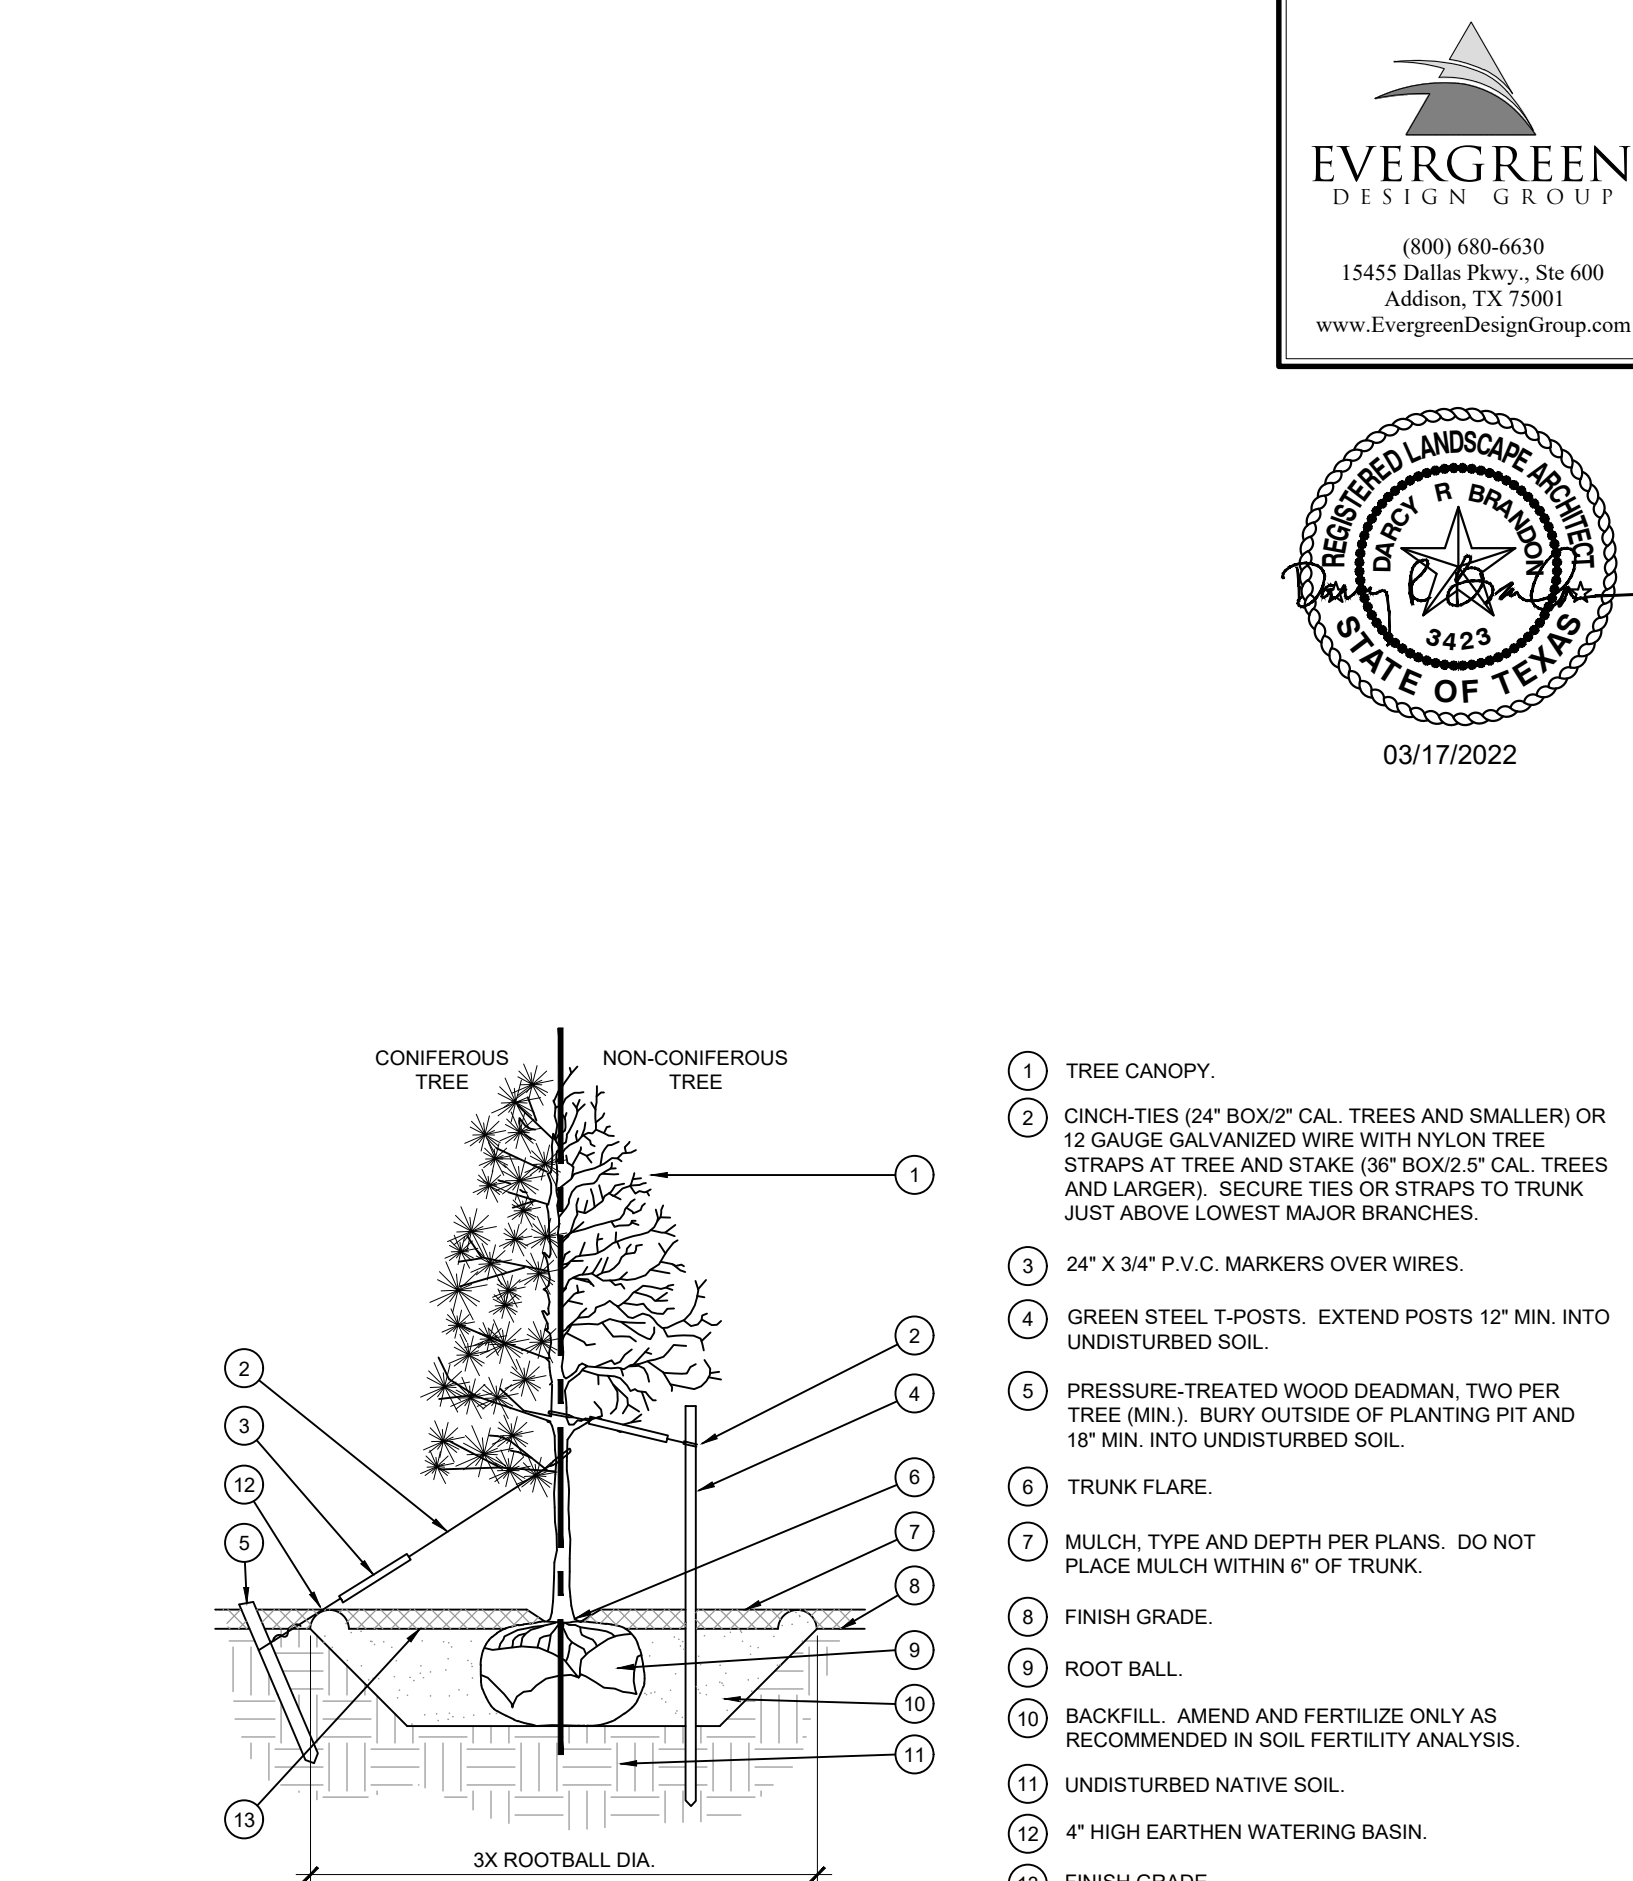

A. TREE PLANTING
SCALE: NOT TO SCALE

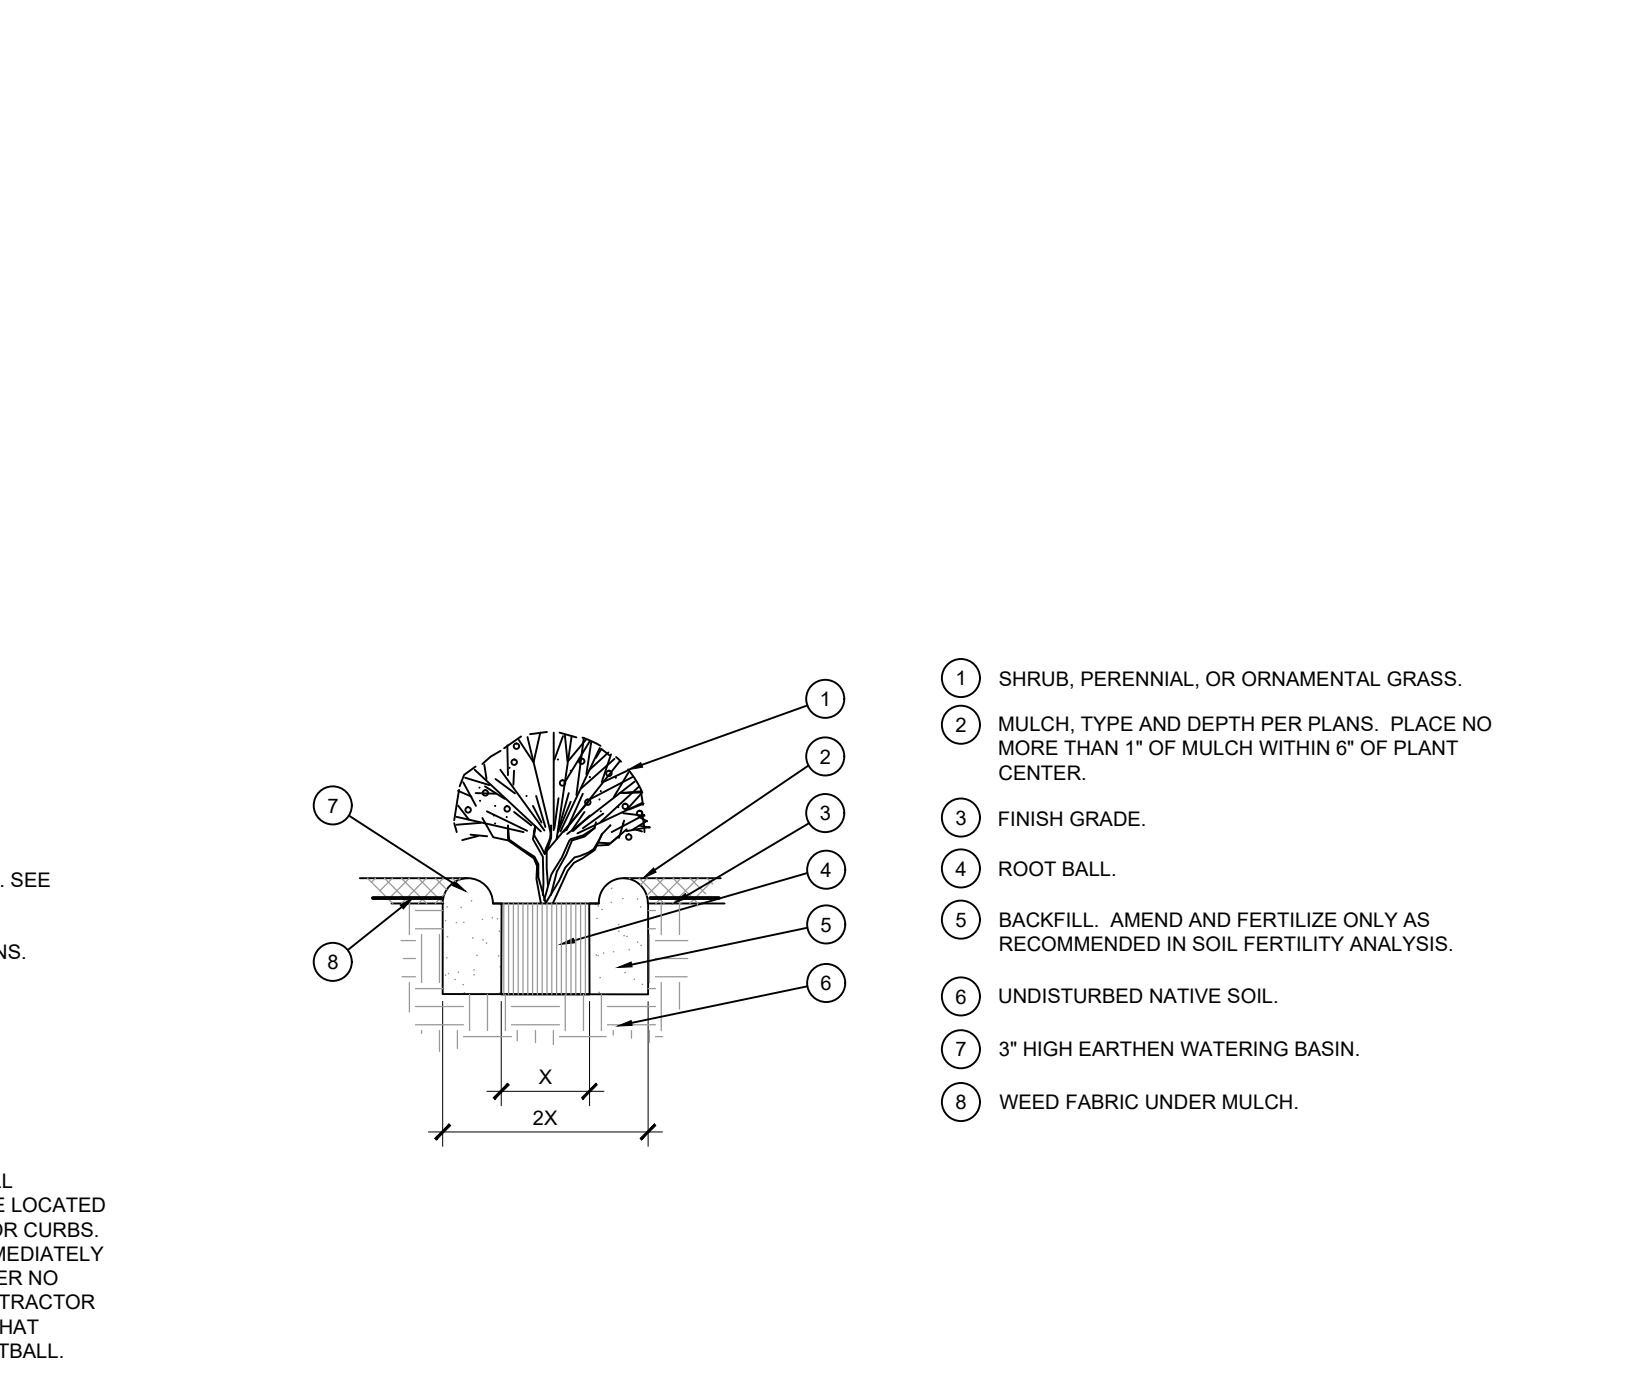

B. SHRUB AND PERENNIAL PLANTING
SCALE: NTS

EVERGREEN DESIGN GROUP
(800) 680-6630
15455 Dallas Pkwy, Ste 600
Addicks, TX 75001
www.EvergreenDesignGroup.com

LANDSCAPE ARCHITECT
STATE OF TEXAS
3422
03/17/2022

GLAY MOORE ENGINEERING
PHONE: 817.801.9572
1900 CENTRAL DR. SUITE 4008
ROCKWALL, TX 75087
WWW.GLAYMOORE.COM

PRELIMINARY
FOR REVIEW ONLY
Not for construction purposes.
GLAYMOORE ENGINEERING
ENGINEERING AND PLANNING
CONSULTANTS
DREW DONOSKY
Project No. 125651 Date 3/17/2022

DWEST ROCKWALL
SH 205 & QUAIL RUN RD
ROCKWALL, TX

LANDSCAPE PLANTING
DETAILS & SPECIFICATIONS


DESIGN: LRR
DRAWN: LRR
CHECKED: CLC
DATE: 03/17/2022
SHEET
LP-2
File No. 2020-021

PLOTTED BY: DARCY BRANDON
 PLOT DATE: 3/17/2022 11:43 AM
 LOCATION: C:\USERS\DACRY\DOCUMENTS\UDBLA_PROJECTS\2022\VEDG\DUWEST - ROCKWALL, TX\DUWEST-ROCKWALL_LP.DWG
 LAST SAVED: 3/17/2022 11:43 AM

PLOTTED BY: DARCY BRANDON
 PLOT DATE: 3/17/2022 11:48 AM
 LOCATION: C:\USERS\DACRY\DOCUMENTS\2022\EDG\DUWEST - ROCKWALL, TX\DUWEST-ROCKWALL_TD.DWG
 LAST SAVED: 3/17/2022 11:48 AM

TREE PROTECTION GENERAL NOTES

- (A) PRIOR TO THE LAND CLEARING STAGE OF DEVELOPMENT, THE CONTRACTOR SHALL CLEARLY MARK ALL PROTECTED TREES FOR WHICH A TREE REMOVAL PERMIT HAS NOT BEEN ISSUED AND SHALL ERECT BARRIERS FOR THE PROTECTION OF THE TREES ACCORDING TO THE FOLLOWING:
 - (1) AROUND AN AREA AT OR GREATER THAN A SIX-FOOT RADIUS OF ALL SPECIES OF MANGROVES AND PROTECTED CABBAGE PALMS;
 - (2) AROUND AN AREA AT OR GREATER THAN THE FULL DRIPLINE OF ALL PROTECTED NATIVE PINES;
 - (3) AROUND AN AREA AT OR GREATER THAN TWO-THIRDS OF THE DRIPLINE OF ALL OTHER PROTECTED SPECIES
- (B) NO PERSON SHALL ATTACH ANY SIGN, NOTICE OR OTHER OBJECT TO ANY PROTECTED TREE OR FASTEN ANY WIRES, CABLES, NAILS OR SCREWS TO ANY PROTECTED TREE IN ANY MANNER THAT COULD PROVE HARMFUL TO THE PROTECTED TREE, EXCEPT AS NECESSARY IN CONJUNCTION WITH ACTIVITIES IN THE PUBLIC INTEREST.
- (C) DURING THE CONSTRUCTION STAGE OF DEVELOPMENT, THE CONTRACTOR SHALL NOT CAUSE OR PERMIT THE CLEANING OF EQUIPMENT OR MATERIAL WITHIN THE OUTSIDE PERIMETER OF THE CROWN (DRIPLINE) OR ON THE NEARBY GROUND OF ANY TREE OR GROUP OF TREES WHICH IS TO BE PRESERVED. WITHIN THE OUTSIDE PERIMETER OF THE CROWN (DRIPLINE) OF ANY TREE OR ON NEARBY GROUND, THE CONTRACTOR SHALL NOT CAUSE OR PERMIT STORAGE OF BUILDING MATERIAL AND/OR EQUIPMENT, OR DISPOSAL OF WASTE MATERIAL SUCH AS PAINTS, OIL, SOLVENTS, ASPHALT, CONCRETE, MORTAR OR ANY OTHER MATERIAL HARMFUL TO THE LIFE OF THE TREE.
- (D) NO PERSON SHALL PERMIT ANY UNNECESSARY FIRE OR BURNING WITHIN 30 FEET OF THE DRIPLINE OF A PROTECTED TREE.
- (E) ANY LANDSCAPING ACTIVITIES WITHIN THE BARRIER AREA SHALL BE ACCOMPLISHED WITH HAND LABOR.
- (F) PRIOR TO ISSUING A CERTIFICATE OF OCCUPANCY OR COMPLIANCE FOR ANY DEVELOPMENT, BUILDING OR STRUCTURE, ALL TREES DESIGNATED TO BE PRESERVED THAT WERE DESTROYED DURING CONSTRUCTION SHALL BE REPLACED BY THE CONTRACTOR WITH TREES OF EQUIVALENT DIAMETER AT BREAST HEIGHT TREE CALIPER AND OF THE SAME SPECIES AS SPECIFIED BY THE CITY ADMINISTRATOR, BEFORE OCCUPANCY OR USE, UNLESS APPROVAL FOR THEIR REMOVAL HAS BEEN GRANTED UNDER PERMIT.
- (G) THE CITY ADMINISTRATOR MAY CONDUCT PERIODIC INSPECTIONS OF THE SITE DURING LAND CLEARANCE AND CONSTRUCTION.
- (H) IF, IN THE OPINION OF THE CITY ADMINISTRATOR, DEVELOPMENT ACTIVITIES WILL SO SEVERELY STRESS SLASH PINES OR ANY OTHER PROTECTED TREE SUCH THAT THEY ARE MADE SUSCEPTIBLE TO INSECT ATTACK, PREVENTATIVE SPRAYING OF THESE TREES BY THE CONTRACTOR MAY BE REQUIRED.

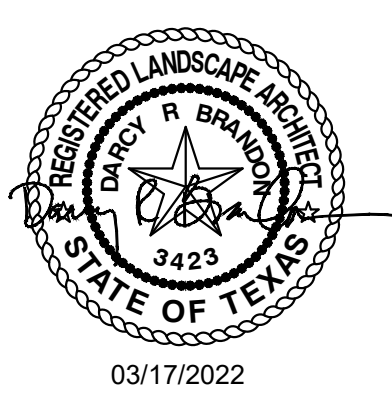

LOT 27
 BLOCK A
 STONE CREEK
 PHASE VII
 CAB. J, PG. 65
 P.R.R.C.T.




PRELIMINARY
 FOR REVIEW ONLY
 Not for construction purposes.
GLAYMOORE ENGINEERING
 ENGINEERING AND PLANNING
 CONSULTANTS
 DREW DONOSKY
 Engineer, No. 125651, Exp. 3/17/2022

**DUWEST ROCKWALL
 SH 205 & QUAIL RUN RD
 ROCKWALL, TX**


TREESCAPE PLAN

DESIGN: LRR
 DRAWN: LRR
 CHECKED: CLC
 DATE: 03/17/2022
 SHEET
TD-1
 File No. 2020-021

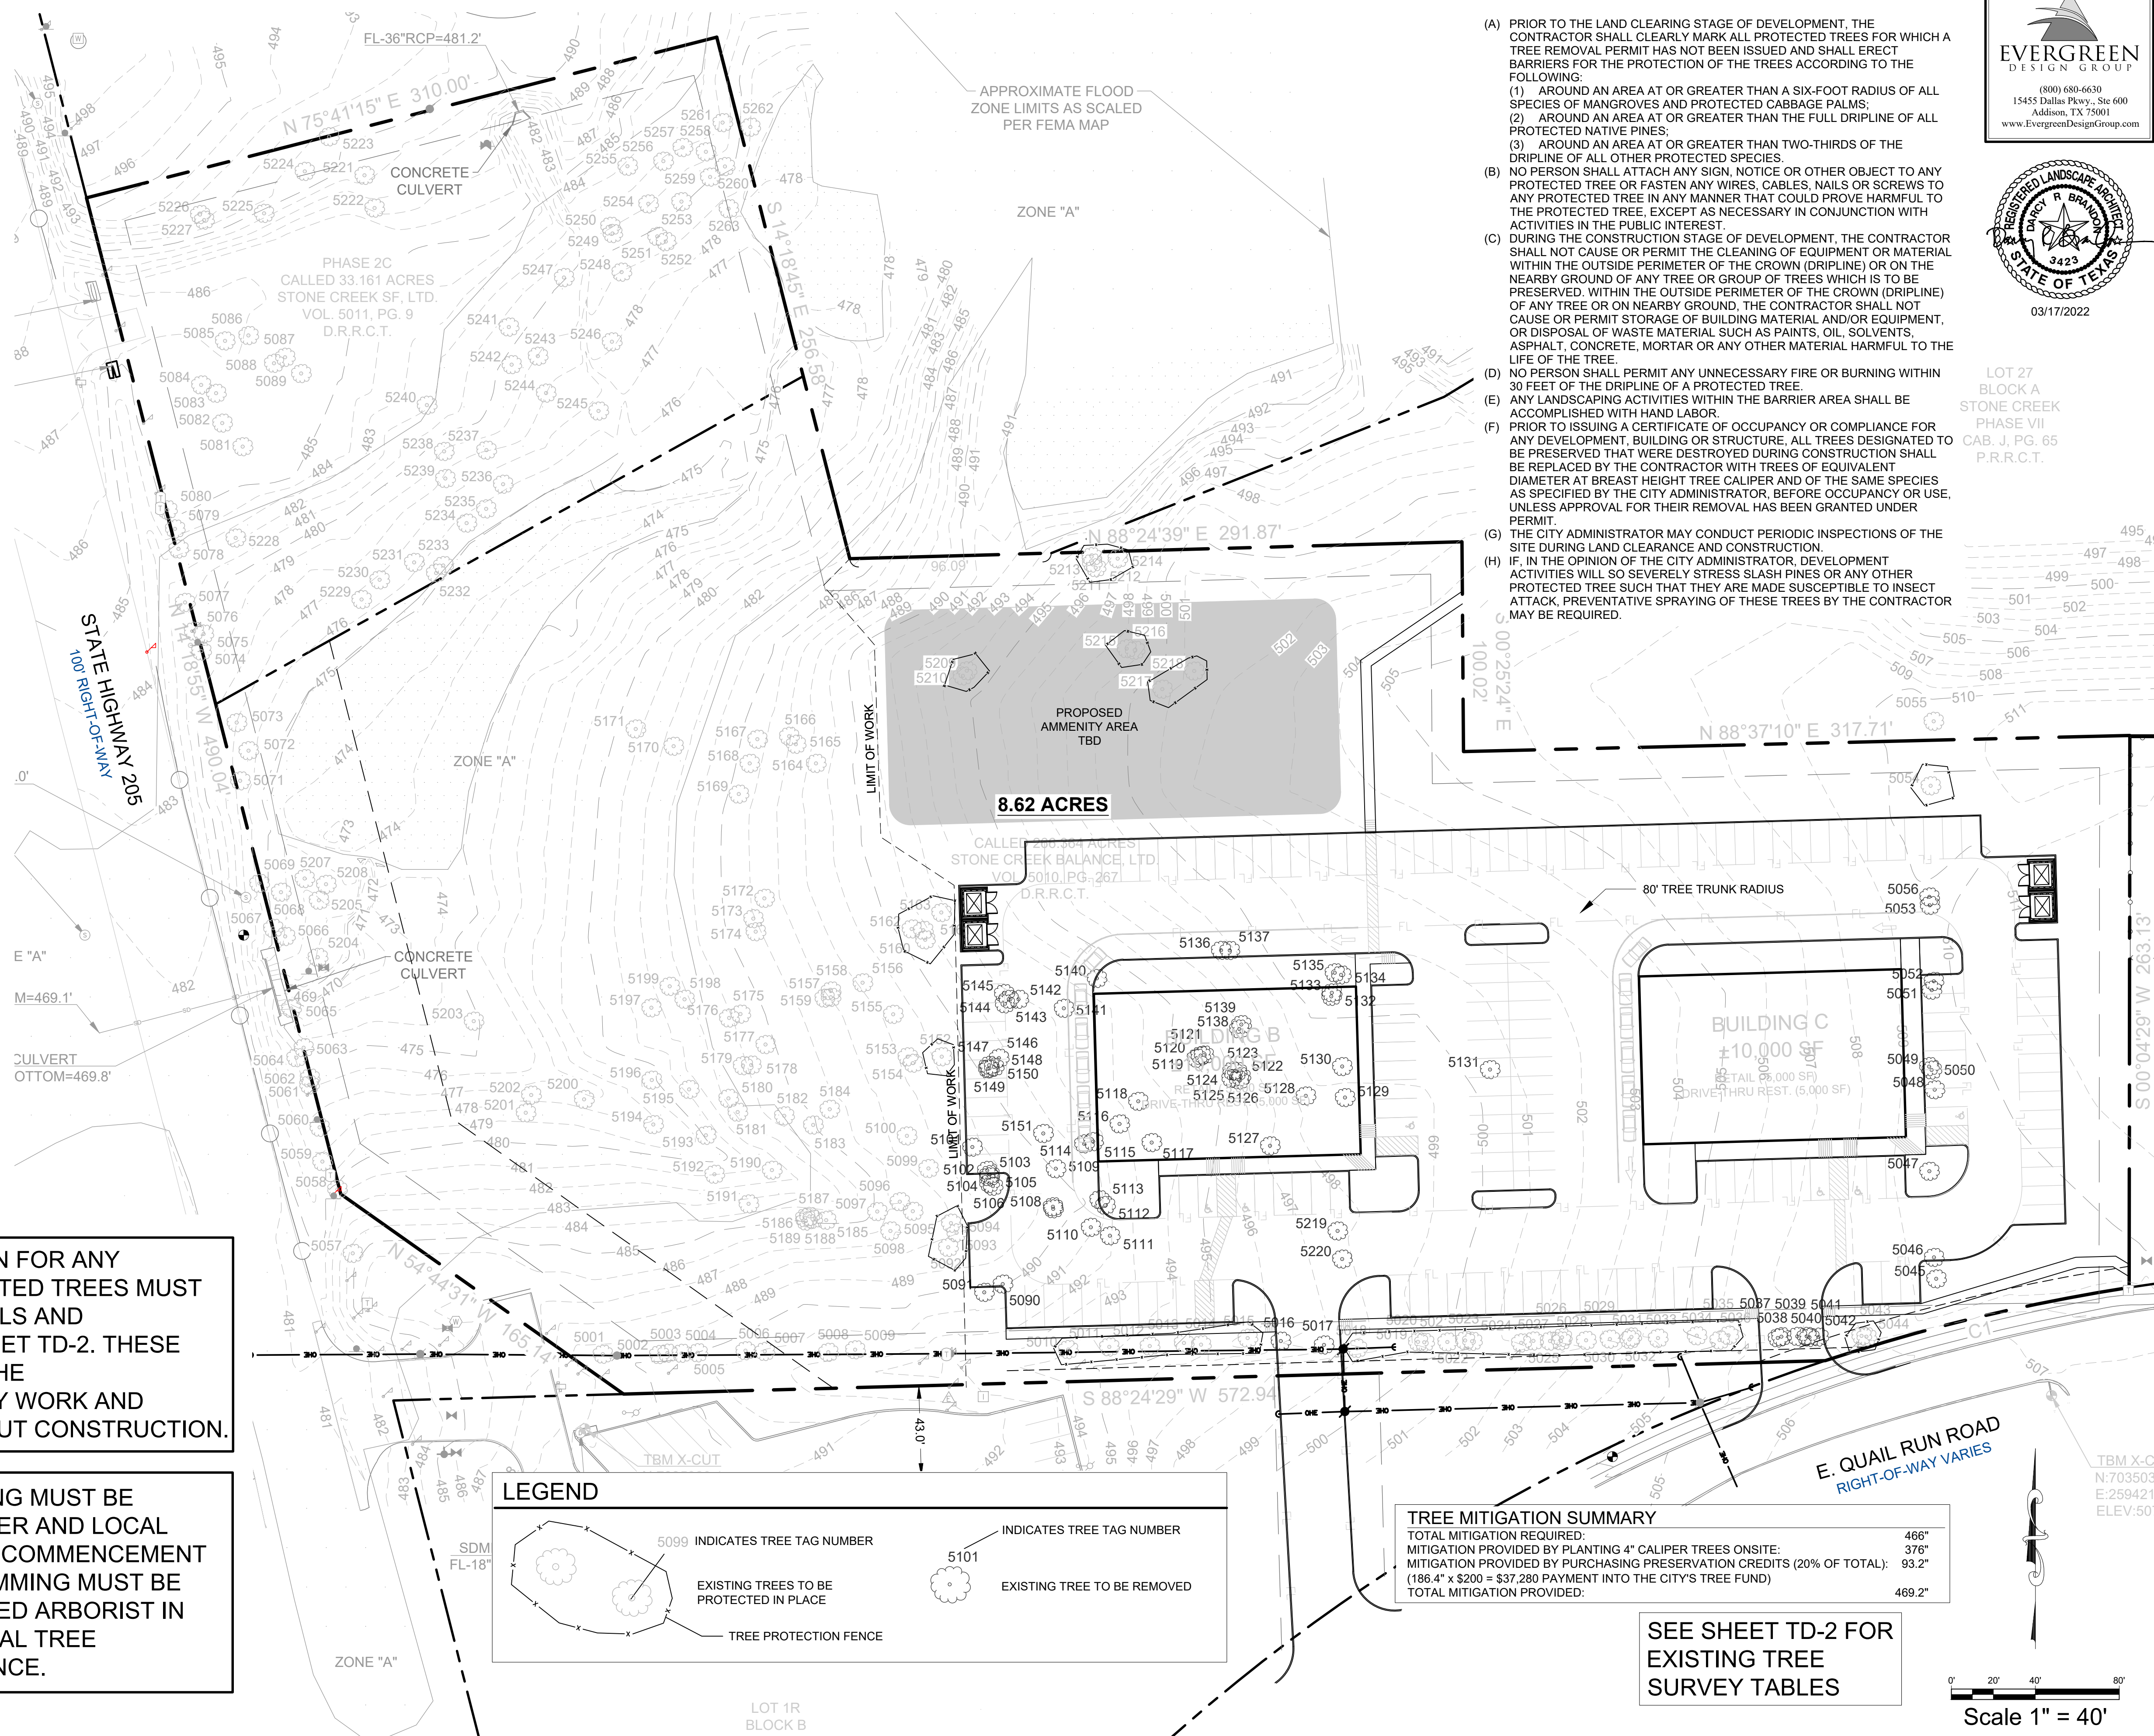

NOTE: TREE PROTECTION FOR ANY PRESERVED OR RELOCATED TREES MUST BE PROVIDED PER DETAILS AND SPECIFICATIONS ON SHEET TD-2. THESE MUST BE UP PRIOR TO THE COMMENCEMENT OF ANY WORK AND MAINTAINED THROUGHOUT CONSTRUCTION.


NOTE: ALL TREE TRIMMING MUST BE APPROVED BY THE OWNER AND LOCAL JURISDICTION PRIOR TO COMMENCEMENT OF WORK. ALL TREE TRIMMING MUST BE DONE BY AN ISA CERTIFIED ARBORIST IN ACCORDANCE WITH LOCAL TREE PRESERVATION ORDINANCE.

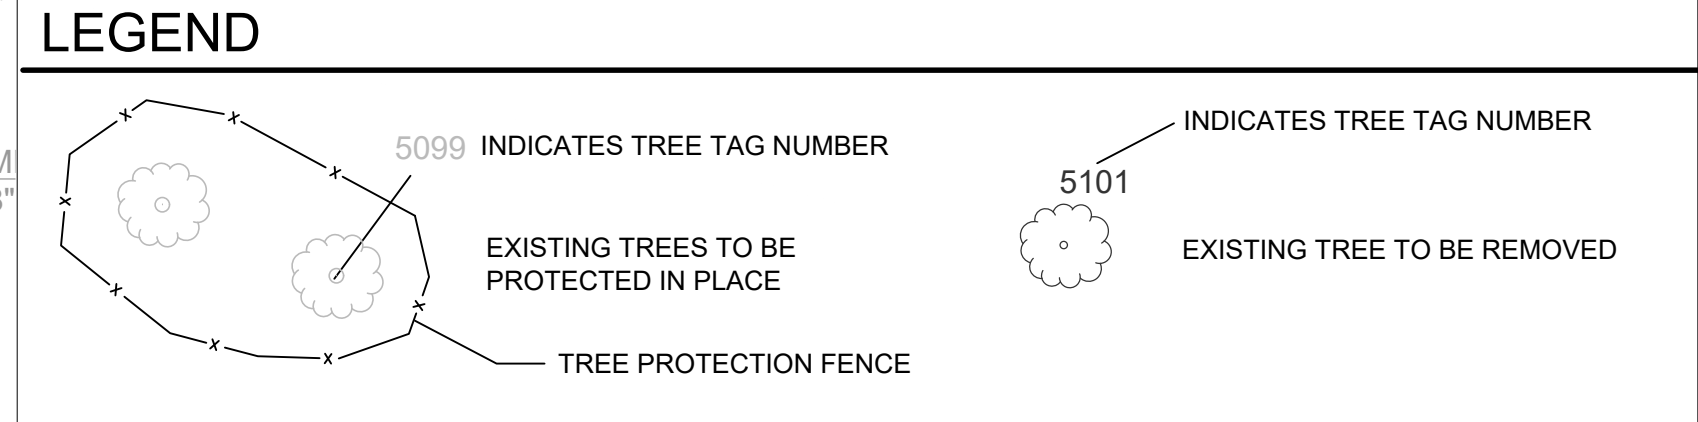



TREE MITIGATION SUMMARY

TOTAL MITIGATION REQUIRED:	466"
MITIGATION PROVIDED BY PLANTING 4" CALIPER TREES ONSITE:	376"
MITIGATION PROVIDED BY PURCHASING PRESERVATION CREDITS (20% OF TOTAL):	93.2"
(186.4" x \$200 = \$37,280 PAYMENT INTO THE CITY'S TREE FUND)	
TOTAL MITIGATION PROVIDED:	469.2"

SEE SHEET TD-2 FOR EXISTING TREE SURVEY TABLES

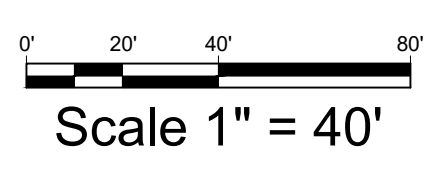

PLOTTED BY: DARCY BRANDON
 3/17/2022 11:49 AM
 C:\USERS\DARCY\DOCUMENTS\DBLA\PROJECTS\2022\EDG\DUWEST - ROCKWALL, TX\DUWEST-ROCKWALL_TD.DWG
 LOCATION: 3/17/2022 11:48 AM
 LAST SAVED:

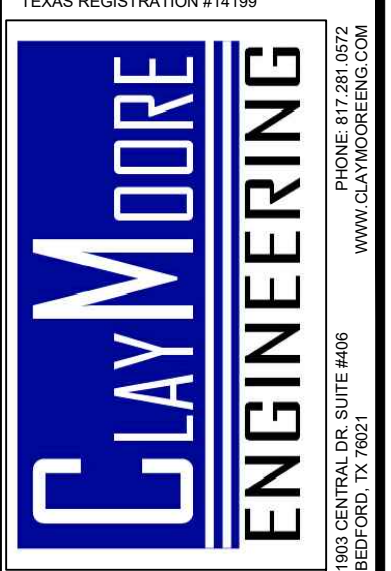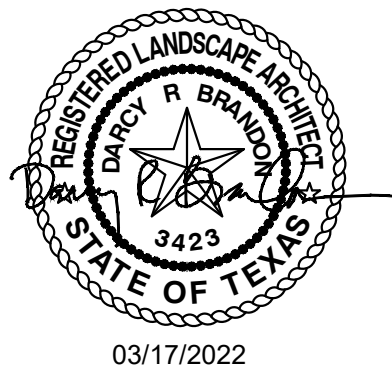

PRELIMINARY
FOR REVIEW ONLY
Not for construction purposes.
CLAYMOORE ENGINEERING
ENGINEERING AND PLANNING
CONSULTANTS
DREW DONOSKY
Engineer, 125651, Date 3/17/2022
P.E. No. 125651, Date 3/17/2022

TREE PROTECTION SPECIFICATIONS

MATERIALS

- FABRIC: 4 FOOT HIGH ORANGE PLASTIC FENCING AS SHOWN ON THE PLANS AND SHALL BE WOVEN WITH 2 INCH MESH OPENINGS SUCH THAT IN A VERTICAL DIMENSION OF 23 INCHES ALONG THE DIAGONALS OF THE OPENINGS THERE SHALL BE AT LEAST 7 MESHES.
- POSTS: POSTS SHALL BE A MINIMUM OF 72 INCHES LONG AND STEEL "T" SHAPED WITH A MINIMUM WEIGHT OF 1.3 POUNDS PER LINEAR FOOT.
- TIE WIRE: WIRE FOR ATTACHING THE FABRIC TO THE T-POSTS SHALL BE NOT LESS THAN NO. 12 GAUGE GALVANIZED WIRE.
- USED MATERIALS: PREVIOUSLY-USED MATERIALS, MEETING THE ABOVE REQUIREMENTS AND WHEN APPROVED BY THE OWNER, MAY BE USED.


CONSTRUCTION METHODS

- ALL TREES AND SHRUBS SHOWN TO REMAIN WITHIN THE PROXIMITY OF THE CONSTRUCTION SITE SHALL BE PROTECTED PRIOR TO BEGINNING ANY DEVELOPMENT ACTIVITY.
- EMPLOY THE SERVICES OF AN ISA (INTERNATIONAL SOCIETY OF ARBORICULTURE) CERTIFIED ARBORIST AND OBTAIN ALL REQUIRED PERMITS TO PRUNE THE EXISTING TREES FOR CLEANING, RAISING AND THINNING, AS MAY BE REQUIRED.
- PROTECTIVE FENCING SHALL BE ERECTED OUTSIDE THE CRITICAL ROOT ZONE (CRZ, EQUAL TO 1' FROM THE TRUNK FOR EVERY 1" OF DBH) AT LOCATIONS SHOWN IN THE PLANS OR AS DIRECTED BY THE LANDSCAPE CONSULTANT AND/OR CITY ARBORIST, AND IN ACCORDANCE WITH THE DETAILS SHOWN ON THE PLANS. FENCING SHALL BE MAINTAINED AND REPAIRED BY THE CONTRACTOR DURING SITE CONSTRUCTION. TREES IN CLOSE PROXIMITY SHALL BE FENCED TOGETHER, RATHER THAN INDIVIDUALLY.
- PROTECTIVE FENCE LOCATIONS IN CLOSE PROXIMITY TO STREET INTERSECTIONS OR DRIVES SHALL ADHERE TO THE APPLICABLE JURISDICTION'S SIGHT DISTANCE CRITERIA.
- THE PROTECTIVE FENCING SHALL BE ERECTED BEFORE SITE WORK COMMENCES AND SHALL REMAIN IN PLACE DURING THE ENTIRE CONSTRUCTION PHASE.
- THE INSTALLATION POSTS SHALL BE PLACED EVERY 6 FEET ON CENTER AND EMBEDDED TO 18 INCHES DEEP. MESH FABRIC SHALL BE ATTACHED TO THE INSTALLATION POSTS BY THE USE OF SUFFICIENT WIRE TIES TO SECURELY FASTEN THE FABRIC TO THE T-POSTS TO HOLD THE FABRIC IN A STABLE AND UPRIGHT POSITION.
- WITHIN THE CRZ:
 - DO NOT CLEAR, FILL OR GRADE IN THE CRZ OF ANY TREE.
 - DO NOT STORE, STOCKPILE OR DUMP ANY JOB MATERIAL, SOIL OR RUBBISH UNDER THE SPREAD OF THE TREE BRANCHES.
 - DO NOT PARK OR STORE ANY EQUIPMENT OR SUPPLIES UNDER THE TREE CANOPY.
 - DO NOT SET UP ANY CONSTRUCTION OPERATIONS UNDER THE TREE CANOPY (SUCH AS PIPE CUTTING AND THREADING, MORTAR MIXING, PAINTING OR LUMBER CUTTING).
 - DO NOT NAIL OR ATTACH TEMPORARY SIGNS METERS, SWITCHES, WIRES, BRACING OR ANY OTHER ITEM TO THE TREES.
 - DO NOT PERMIT RUNOFF FROM WASTE MATERIALS INCLUDING SOLVENTS, CONCRETE WASHOUTS, ASPHALT TACK COATS (MC-30 OIL), ETC. TO ENTER THE CRZ. BARRIERS ARE TO BE PROVIDED TO PREVENT SUCH RUNOFF SUBSTANCES FROM ENTERING THE CRZ WHENEVER POSSIBLE, INCLUDING IN AN AREA WHERE RAIN OR SURFACE WATER COULD CARRY SUCH MATERIALS TO THE ROOT SYSTEM OF THE TREE.
- ROUTE UNDERGROUND UTILITIES TO AVOID THE CRZ. IF DIGGING IS UNAVOIDABLE, BORE UNDER THE ROOTS, OR HAND DIG TO AVOID SEVERING THEM.


- WHERE EXCAVATION IN THE VICINITY OF TREES MUST OCCUR, SUCH AS FOR IRRIGATION INSTALLATION, PROCEED WITH CAUTION, AND USING HAND TOOLS ONLY.
- THE CONTRACTOR SHALL NOT CUT ROOTS LARGER THAN ONE INCH IN DIAMETER WHEN EXCAVATION OCCURS NEAR EXISTING TREES. ALL ROOTS LARGER THAN ONE INCH IN DIAMETER ARE TO BE CUT CLEANLY. FOR OAKS ONLY, ALL WOUNDS SHALL BE PAINTED WITH WOUND SEALER WITHIN 30 MINUTES
- REMOVE ALL TREES, SHRUBS OR BUSHES TO BE CLEARED FROM PROTECTED ROOT ZONE AREAS BY HAND.
- TREES DAMAGED OR KILLED DUE TO CONTRACTOR'S NEGLIGENCE DURING CONSTRUCTION SHALL BE MITIGATED AT THE CONTRACTOR'S EXPENSE AND TO THE PROJECT OWNER'S AND LOCAL JURISDICTION'S SATISFACTION.
- ANY TREE REMOVAL SHALL BE APPROVED BY THE OWNER AND LOCAL JURISDICTION PRIOR TO ITS REMOVAL, AND THE CONTRACTOR SHALL HAVE ALL REQUIRED PERMITS FOR SUCH ACTIVITIES.
- COVER EXPOSED ROOTS AT THE END OF EACH DAY WITH SOIL, MULCH OR WET BURLAP.
- IN CRITICAL ROOT ZONE AREAS THAT CANNOT BE PROTECTED DURING CONSTRUCTION AND WHERE HEAVY TRAFFIC IS ANTICIPATED, COVER THE SOIL WITH EIGHT INCHES OF ORGANIC MULCH TO MINIMIZE SOIL COMPACTION. THIS EIGHT INCH DEPTH OF MULCH SHALL BE MAINTAINED THROUGHOUT CONSTRUCTION.
- WATER ALL TREES IMPACTED BY CONSTRUCTION ACTIVITIES, DEEPLY ONCE A WEEK DURING PERIODS OF HOT DRY WEATHER. SPRAY TREE CROWNS WITH WATER PERIODICALLY TO REDUCE DUST ACCUMULATION ON THE LEAVES.
- WHEN INSTALLING CONCRETE ADJACENT TO THE ROOT ZONE OF A TREE, USE A PLASTIC VAPOR BARRIER BEHIND THE CONCRETE TO PROHIBIT LEACHING OF LIME INTO THE SOIL.
- CONTRACTOR SHALL REMOVE AND DISPOSE OF ALL TREE PROTECTION FENCING WHEN ALL THREATS TO THE EXISTING TREES FROM CONSTRUCTION-RELATED ACTIVITIES HAVE BEEN REMOVED.

TREES THAT ARE MARKED TO BE PRESERVED ON A SITE PLAN AND FOR WHICH UTILITIES MUST PASS THROUGH THEIR ROOT PROTECTION ZONES MAY REQUIRE TUNNELING AS OPPOSED TO OPEN TRENCHES. THE DECISION TO TUNNEL WILL BE DETERMINED ON A CASE BY CASE BASIS BY THE ENGINEER.

TUNNELS SHALL BE DUG THROUGH THE ROOT PROTECTION ZONE IN ORDER TO MINIMIZE ROOT DAMAGE.

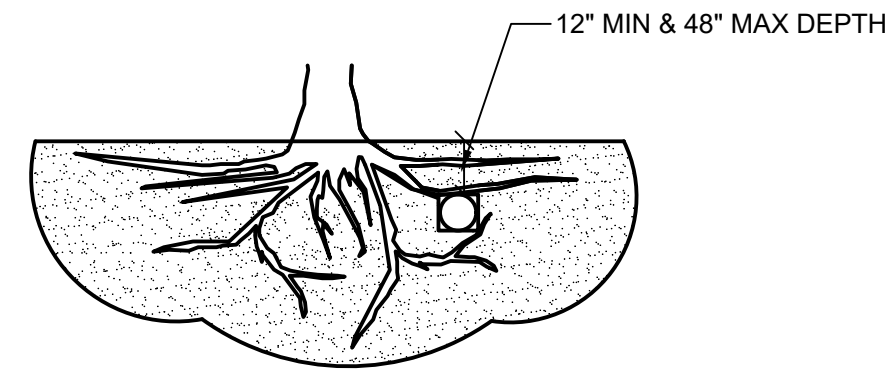

TUNNEL TO MINIMIZE ROOT DAMAGE (TOP) AS OPPOSED TO SURFACE-DUG TRENCHES IN ROOT PROTECTION ZONE WHEN THE 5' MINIMUM DISTANCE FROM TRUNK CAN NOT BE ACHIEVED.

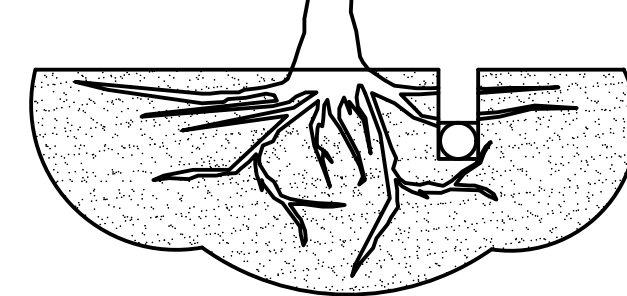


OPEN TRENCHING MAY BE USED IF EXPOSED TREE ROOTS DO NOT EXCEED 3" OR ROOTS CAN BE BENT BACK.


C BORING THROUGH ROOT PROTECTION ZONE
SCALE: NOT TO SCALE

NOTES

- RETENTION AREAS WILL BE SET AS PART OF THE REVIEW PROCESS AND PRE-CONSTRUCTION MEETING.
- BOUNDARIES OF RETENTION AREAS MUST BE STAKED AT THE PRE-CONSTRUCTION MEETING AND FLAGGED PRIOR TO ROOT PRUNING.
- EXACT LOCATION OF ROOT PRUNING SHALL BE DETERMINED IN THE FIELD IN COORDINATION WITH THE FORESTRY INSPECTOR.
- TRENCH SHOULD BE IMMEDIATELY BACKFILLED WITH EXCAVATED SOIL OR OTHER ORGANIC SOIL AS SPECIFIED PER PLAN OR BY THE FORESTRY INSPECTOR.
- ROOTS SHALL BE CLEANLY CUT USING VIBRATORY KNIFE OR OTHER ACCEPTABLE EQUIPMENT. ROOT PRUNING METHODS AND MEANS MUST BE IN ACCORDANCE WITH ANSI STANDARD A3000.
- ALL PRUNING MUST BE EXECUTED AT LOD SHOWN ON PLANS OR AS AUTHORIZED IN WRITING BY THE FORESTRY INSPECTOR.
- SUPPLEMENTAL WATERING MAY BE REQUIRED FOR ROOT PRUNED TREES THROUGHOUT THE GROWING SEASON DURING CONSTRUCTION AND SUBSEQUENT WARRANTY AND MAINTENANCE PERIOD.

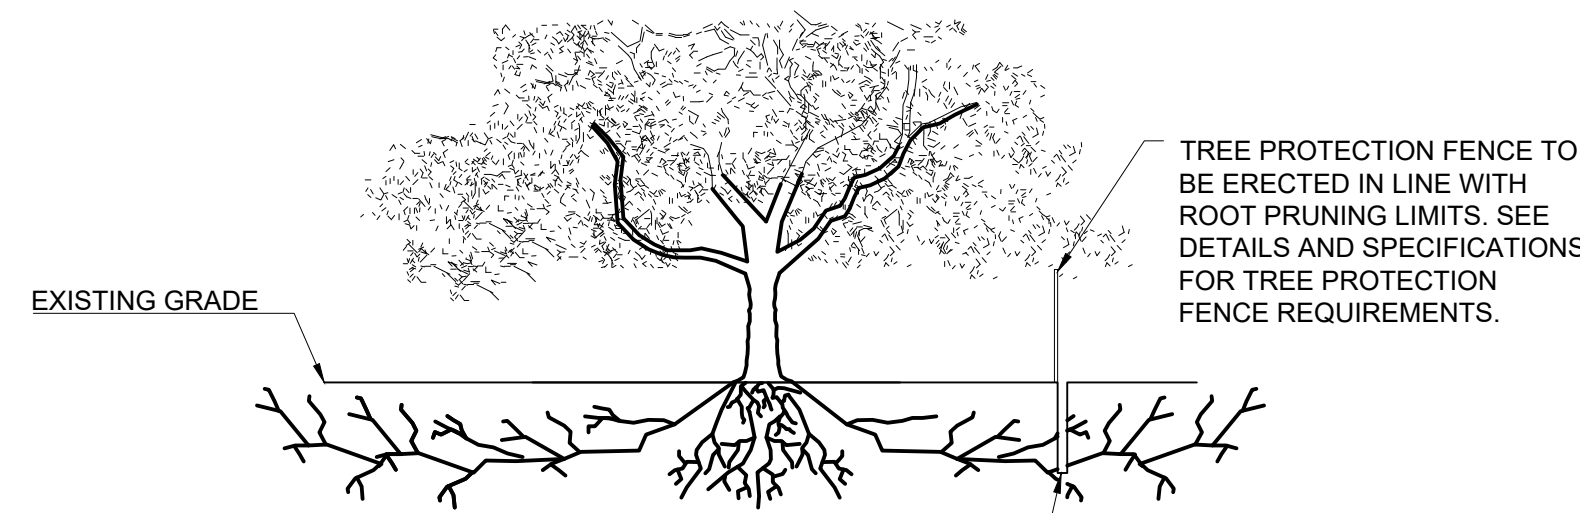


D ROOT PRUNING DETAIL
SCALE: NOT TO SCALE

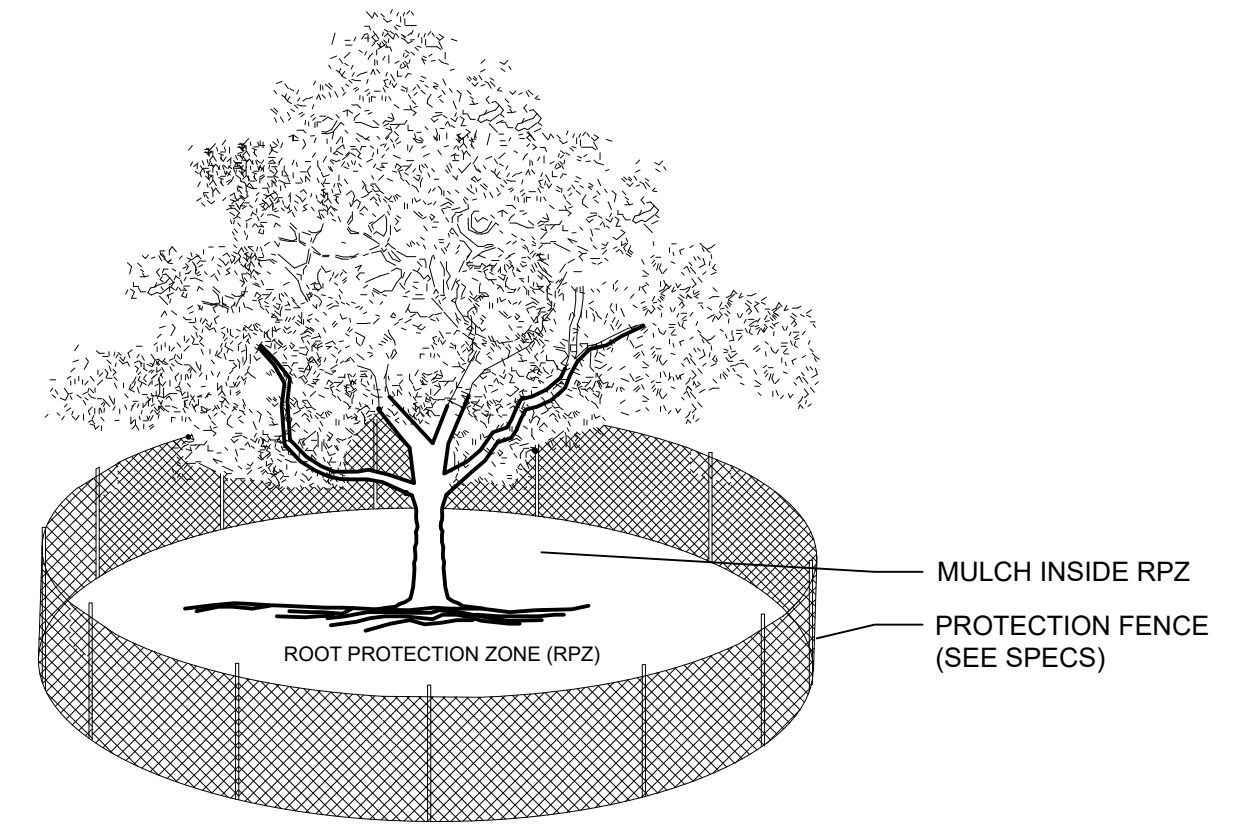

NOTES:

- THE FENCING LOCATION SHOWN ABOVE IS DIAGRAMATIC ONLY AND WILL CONFORM TO THE DRIP LINE AND BE LIMITED TO PROJECT BOUNDARY. WHERE MULTIPLE ADJACENT TREES WILL BE ENCLOSED BY FENCING, THE FENCING SHALL BE CONTINUOUS AROUND ALL TREES. FOR ACCEPTABLE FENCING MATERIALS SEE SPECIFICATIONS.

A TREE PROTECTION FENCE
SCALE: NOT TO SCALE

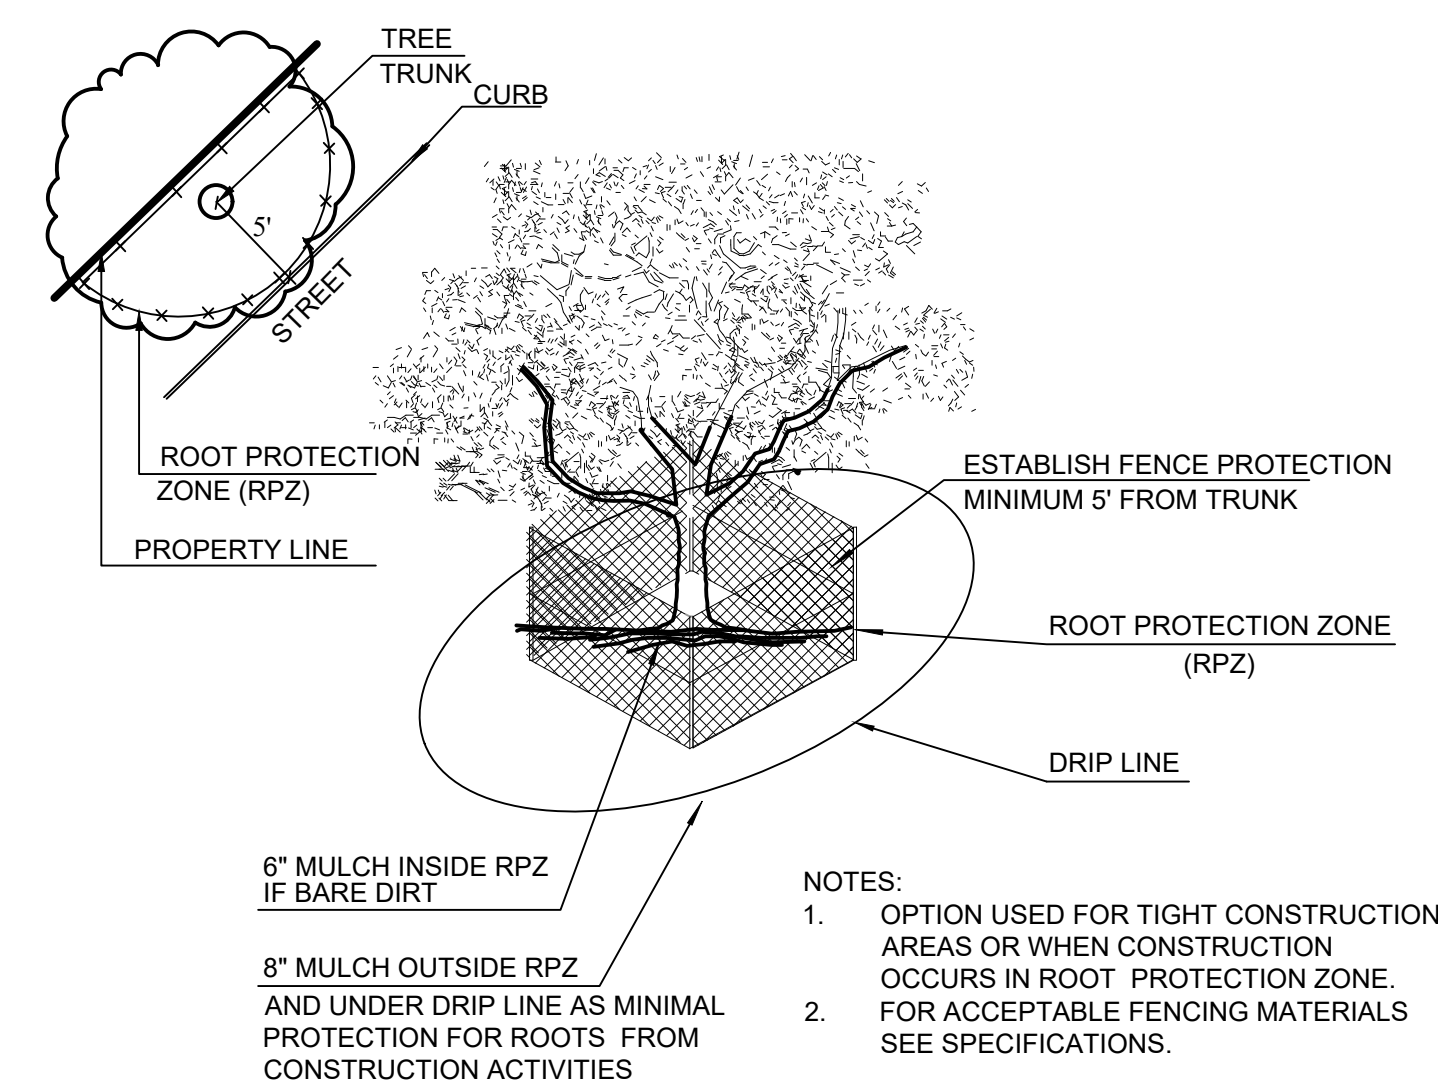

B TREE PROTECTION FENCE - TIGHT CONSTRUCTION
SCALE: NOT TO SCALE

NOTES:

- OPTION USED FOR TIGHT CONSTRUCTION AREAS OR WHEN CONSTRUCTION OCCURS IN ROOT PROTECTION ZONE.
- FOR ACCEPTABLE FENCING MATERIALS SEE SPECIFICATIONS.

**DUWEST ROCKWALL
SH 205 & QUAIL RUN RD
ROCKWALL, TX**

**TREESCAPE PLAN
DETAILS & SPECIFICATIONS**

DESIGN:	LRR
DRAWN:	LRR
CHECKED:	CLC
DATE:	03/17/2022

SHEET
TD-3

DUWEST ROCKWALL - RETAIL SHELL
N.E. CORNER OF STATE HWY 205 AND
E. QUAIL RUN RD. ROCKWALL, TX 75087

ISSUE DATE: 03/16/2022
MODUS JOB #: 210409


REVISION DATES:




03/16/2022
SHEET NUMBER

PH1.01

SHEET NAME
**SITE PLAN
PHOTOMETRICS**

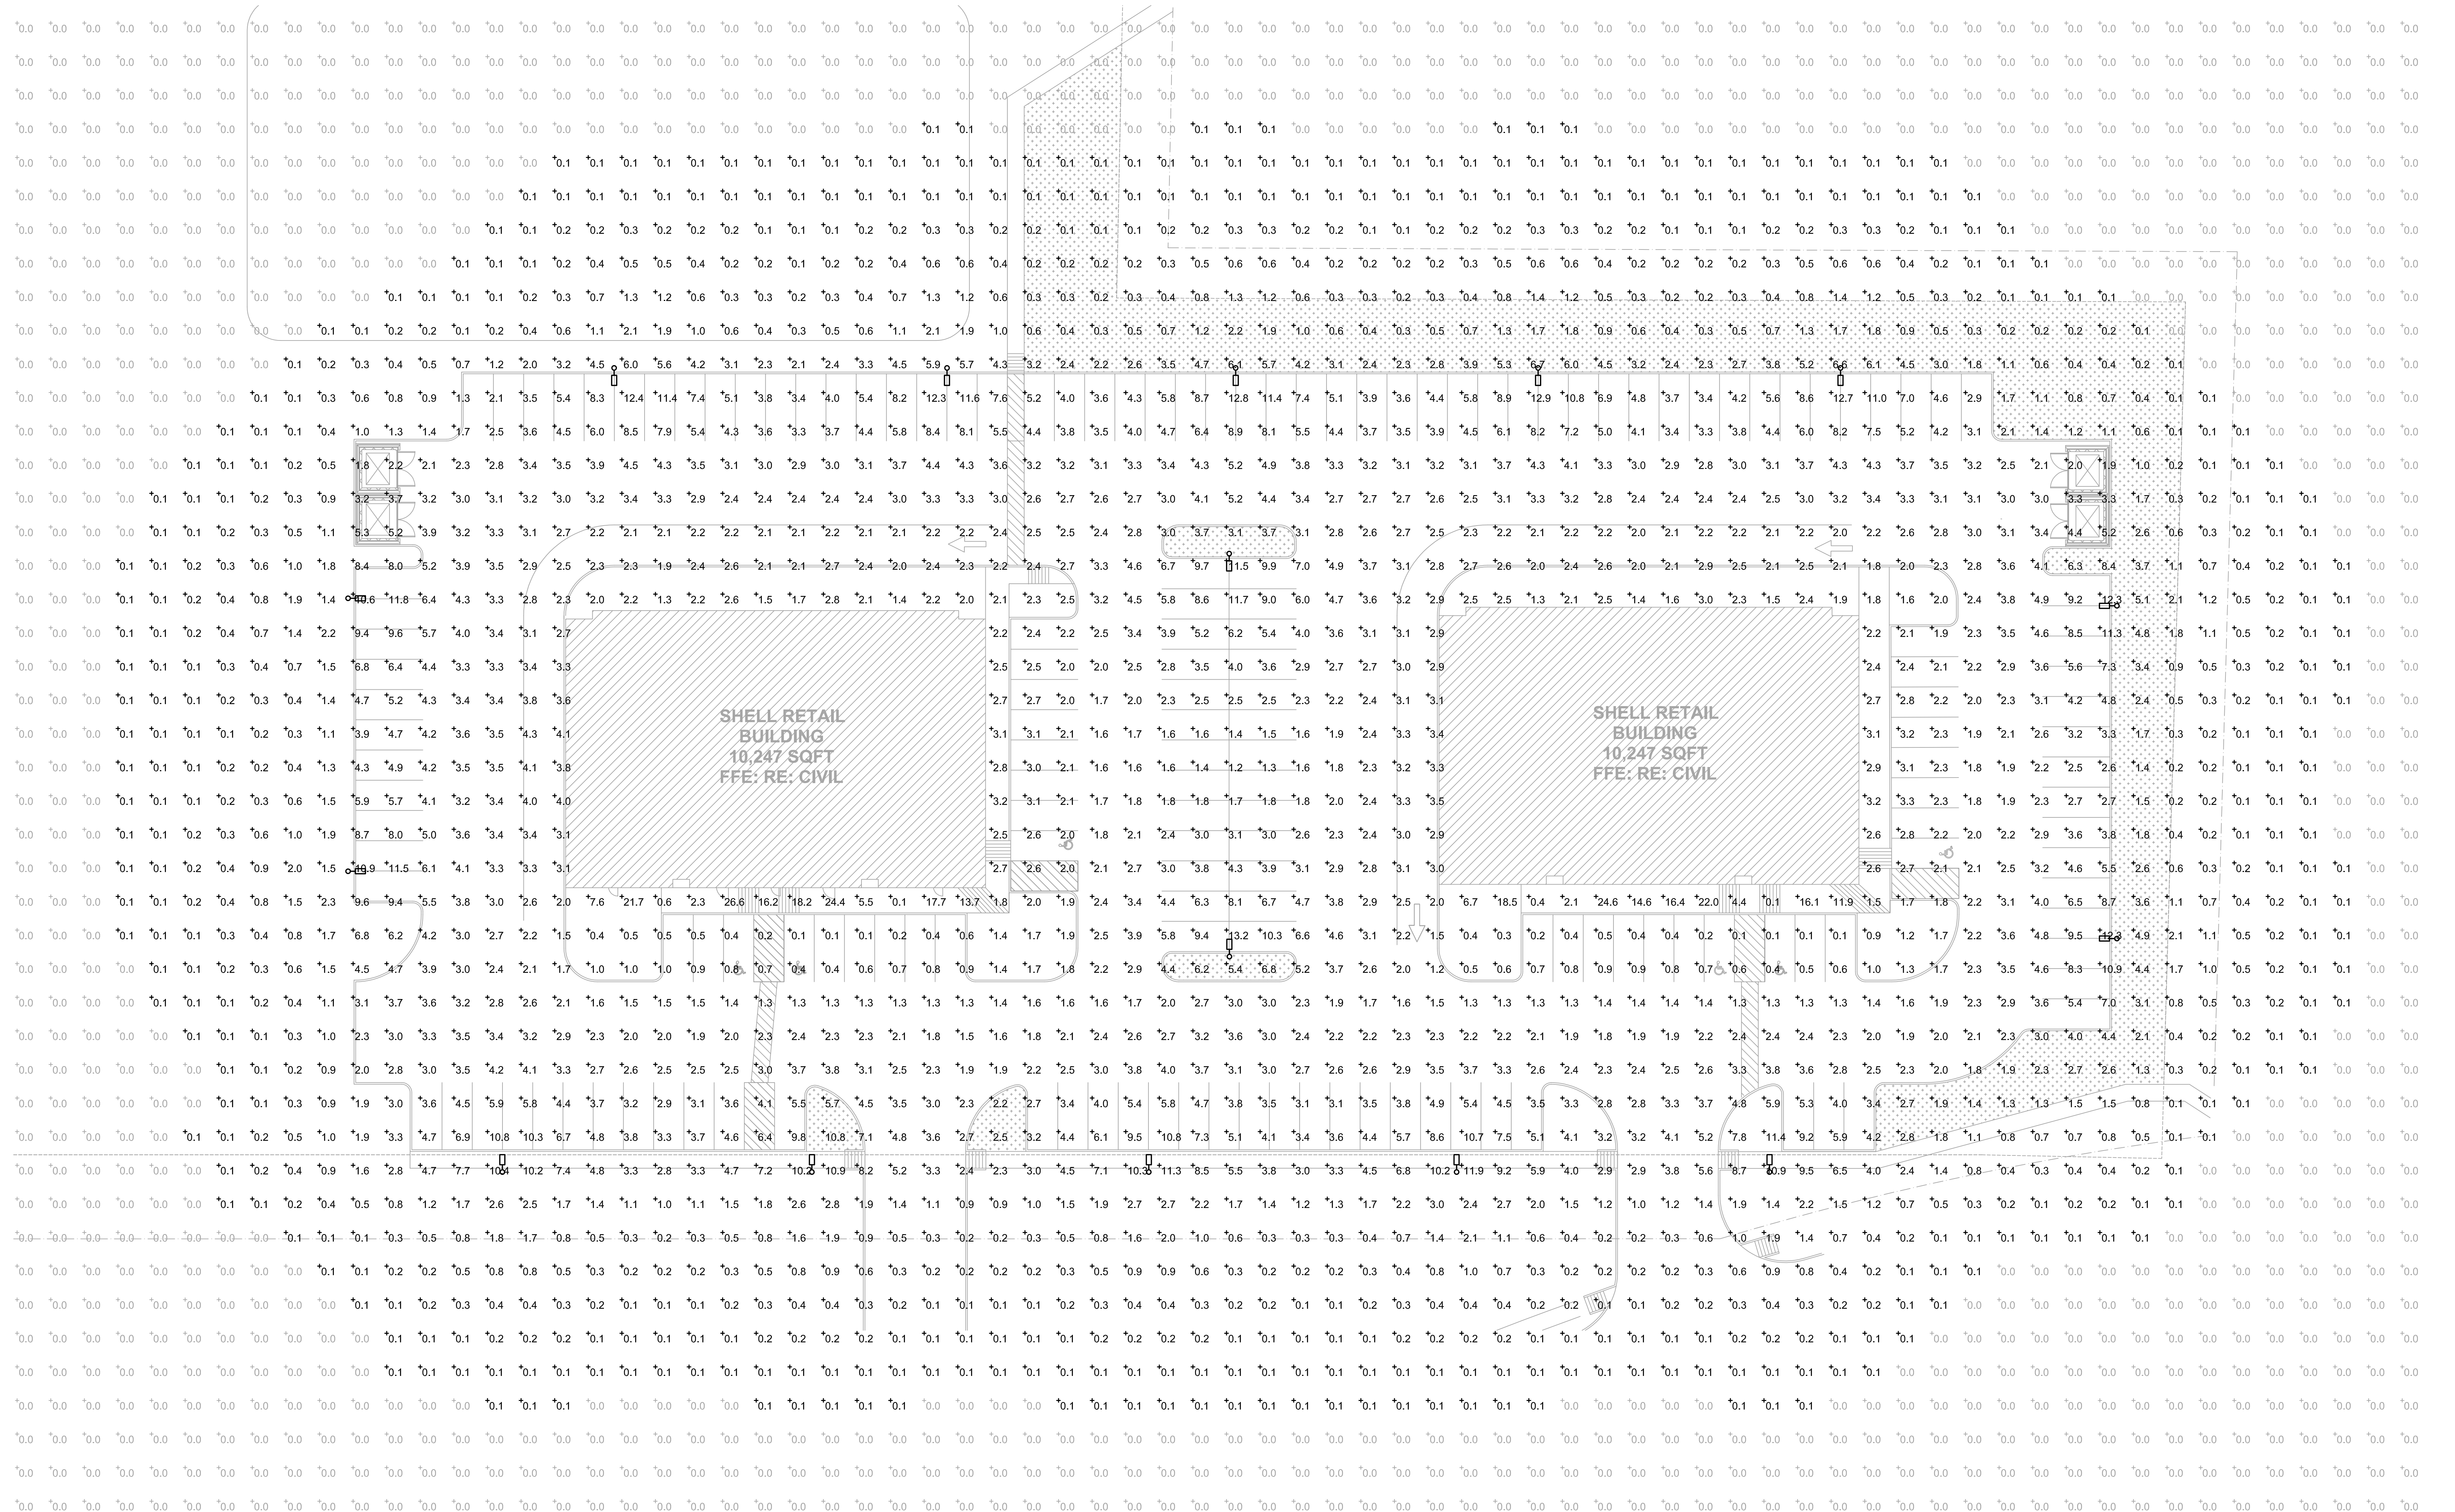

1 SITE PLAN - PHOTOMETRICS
SCALE: 1"=20'-0"

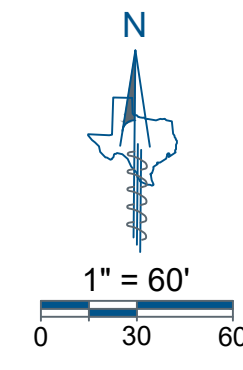

LEGAL DESCRIPTION

Being a 8.62 acre tract or parcel of land situated in the Samuel King Survey, Abstract Number 131 in the City of Rockwall, Rockwall County, Texas and being a portion of a called 33.151 acre tract of land described as Phase 2C in the deed to Stone Creek SF, LTD., recorded in Volume 5011, Page 9 of the Deed Records of Rockwall County, Texas and a portion of a called 266.364 acre tract of land described in the deed to Stone Creek Balance, LTD., recorded in Volume 5010, Page 267 of the Deed Records of Rockwall County, Texas.

SURVEYOR NOTES


- This survey was performed without the benefit of an Abstract of Title or Title Commitment. Research of record documents done by Eagle Surveying was performed for the purpose of determining the boundary of this property and adjoining parcels. Additional record documents may exist and encumber this property.
- Elevations shown on this survey are based on GPS observations utilizing the AllTerra RTK Network. North American Vertical Datum of 1988 (Geoid 12A).
- The approximate location of any Underground Utilities shown on this survey was derived from above ground observation and Utility markings. No excavation was performed on this site at the time of this survey. For the exact location of the Underground Utilities call 1-800-545-6005. Eagle Surveying, LLC accepts no liability as to the accuracy of the Underground Utilities.
- This document represents an accurate on the ground survey of a tract of land on State Highway 205 and E. Quail Run Road in the City of Rockwall, Rockwall County, Texas, on January 18th, 2022.

FLOOD NOTE

This property is located in **Zone "A" & Non-Shaded Zone "X"** as scaled from the F.E.M.A. Flood Insurance Rate Map dated September 26, 2008 and is located in Community Number 480547 as shown on Map Number 48397C0030L, as affected by Letter of Map Revision with Case Number 14-06-0263P, issued April 18, 2014, and effective August 29, 2014 for the City of Rockwall, Rockwall County, Texas, Community Number 480547. The location of the Flood Zone is approximate. For the exact Flood Zone designation, contact 1-(877) FEMA MAP.

TREE TABLE		
TAG	COMMON NAME	DBH (INCHES)
5089	BOIS D'ARC	23
5090	BOIS D'ARC	30
5091	PECAN	12
5092	ELM	10
5093	ELM	7
5094	HACKBERRY	8
5095	HACKBERRY	9
5096	ELM	6
5097	ELM	12
5098	HACKBERRY	11
5099	BOIS D'ARC	26
5100	CEDAR	9
5101	WILLOW	13
5102	HACKBERRY	13
5103	HACKBERRY	10
5104	HACKBERRY	6
5105	HACKBERRY	12
5106	HACKBERRY	9
5107	BOIS D'ARC	30
5108	HACKBERRY	19
5109	HACKBERRY	10
5110	ELM	8
5111	ELM	7
5112	HACKBERRY	13
5113	HACKBERRY	6
5114	HACKBERRY	9
5115	HERCULES CLUB	6
5116	HACKBERRY	8
5117	BOIS D'ARC	36
5118	LOGUST	12
5119	HACKBERRY	12
5120	BOIS D'ARC	18
5121	HACKBERRY	14
5122	HACKBERRY	8
5123	HACKBERRY	6
5124	BOIS D'ARC	18
5125	HACKBERRY	10
5126	HACKBERRY	10
5127	HACKBERRY	10
5128	HACKBERRY	6
5129	HACKBERRY	12
5130	HACKBERRY	6
5131	HACKBERRY	14
5132	HACKBERRY	12
5133	HACKBERRY	8
5134	CEDAR	12
5135	CEDAR	12
5136	HACKBERRY	17
5137	BOIS D'ARC	26
5138	HACKBERRY	14
5139	BOIS D'ARC	20
5140	CEDAR	14
5141	BOIS D'ARC	38
5142	HACKBERRY	18
5143	BOIS D'ARC	14
5144	HACKBERRY	19
5145	BOIS D'ARC	12
5146	CEDAR	7
5147	BOIS D'ARC	10
5148	HACKBERRY	10
5149	BOIS D'ARC	10
5150	HACKBERRY	7
5151	ELM	10
5152	HACKBERRY	7
5153	CEDAR	6
5154	BOIS D'ARC	34
5155	BOIS D'ARC	36
5156	CEDAR	10
5157	HACKBERRY	20
5158	BOIS D'ARC	8
5159	HACKBERRY	13
5160	HACKBERRY	16
5161	HACKBERRY	12
5162	CEDAR	8
5163	HERCULES CLUB	8
5164	CEDAR	10
5165	CEDAR	8
5166	CEDAR	10
5167	CEDAR	12
5168	BOIS D'ARC	39
5169	CEDAR	9
5170	CEDAR	10
5171	BOIS D'ARC	40
5172	CEDAR	12
5173	CEDAR	7
5174	BOIS D'ARC	31
5175	CEDAR	8

TREE TABLE		
TAG	COMMON NAME	DBH (INCHES)
5176	HACKBERRY	8
5177	CEDAR	21
5178	BOIS D'ARC	21
5179	HACKBERRY	8
5180	HACKBERRY	8
5181	CEDAR	10
5182	BOIS D'ARC	14
5183	CEDAR	6
5184	BOIS D'ARC	26
5185	HACKBERRY	10
5186	BOIS D'ARC	10
5187	HACKBERRY	9
5188	BOIS D'ARC	10
5189	BOIS D'ARC	14
5190	HACKBERRY	16
5191	ELM	10
5192	ELM	8
5193	ELM	6
5194	BOIS D'ARC	20
5195	BOIS D'ARC	11
5196	HERCULES CLUB	13
5197	BOIS D'ARC	33
5198	HACKBERRY	8
5199	HACKBERRY	6
5200	ELM	28
5201	CEDAR	12
5202	CEDAR	10
5203	ELM	25
5204	WILLOW	30
5205	WILLOW	13
5207	WILLOW	12
5208	WILLOW	16
5209	BOIS D'ARC	25
5210	HACKBERRY	20
5211	HERCULES CLUB	10
5212	HACKBERRY	10
5213	BOIS D'ARC	28
5214	HACKBERRY	10
5215	HACKBERRY	10
5216	HACKBERRY	10
5217	HERCULES CLUB	8
5218	HERCULES CLUB	8
5219	HACKBERRY	12
5220	HACKBERRY	14
5221	BOIS D'ARC	24
5222	BOIS D'ARC	30
5223	BOIS D'ARC	38
5224	BOIS D'ARC	39
5225	BOIS D'ARC	26
5226	HACKBERRY	6
5227	BOIS D'ARC	6
5228	BOIS D'ARC	36
5229	PECAN	35
5230	PECAN	30
5231	PECAN	18
5232	PECAN	21
5233	PECAN	22
5234	PECAN	25
5235	PECAN	20
5236	PECAN	25
5237	PECAN	19
5238	PECAN	31
5239	PECAN	29
5240	PECAN	33
5241	PECAN	34
5242	CEDAR	12
5243	PECAN	21
5244	PECAN	23
5245	ELM	9
5246	PECAN	55
5247	PECAN	21
5248	PECAN	18
5249	PECAN	18
5250	PECAN	33
5251	PECAN	22
5252	PECAN	19
5253	PECAN	34
5254	PECAN	28
5255	CEDAR	10
5256	PECAN	11
5257	PECAN	20
5258	PECAN	30
5259	PECAN	25
5260	PECAN	15
5261	PECAN	22
5262	PECAN	30
5263	PECAN	20

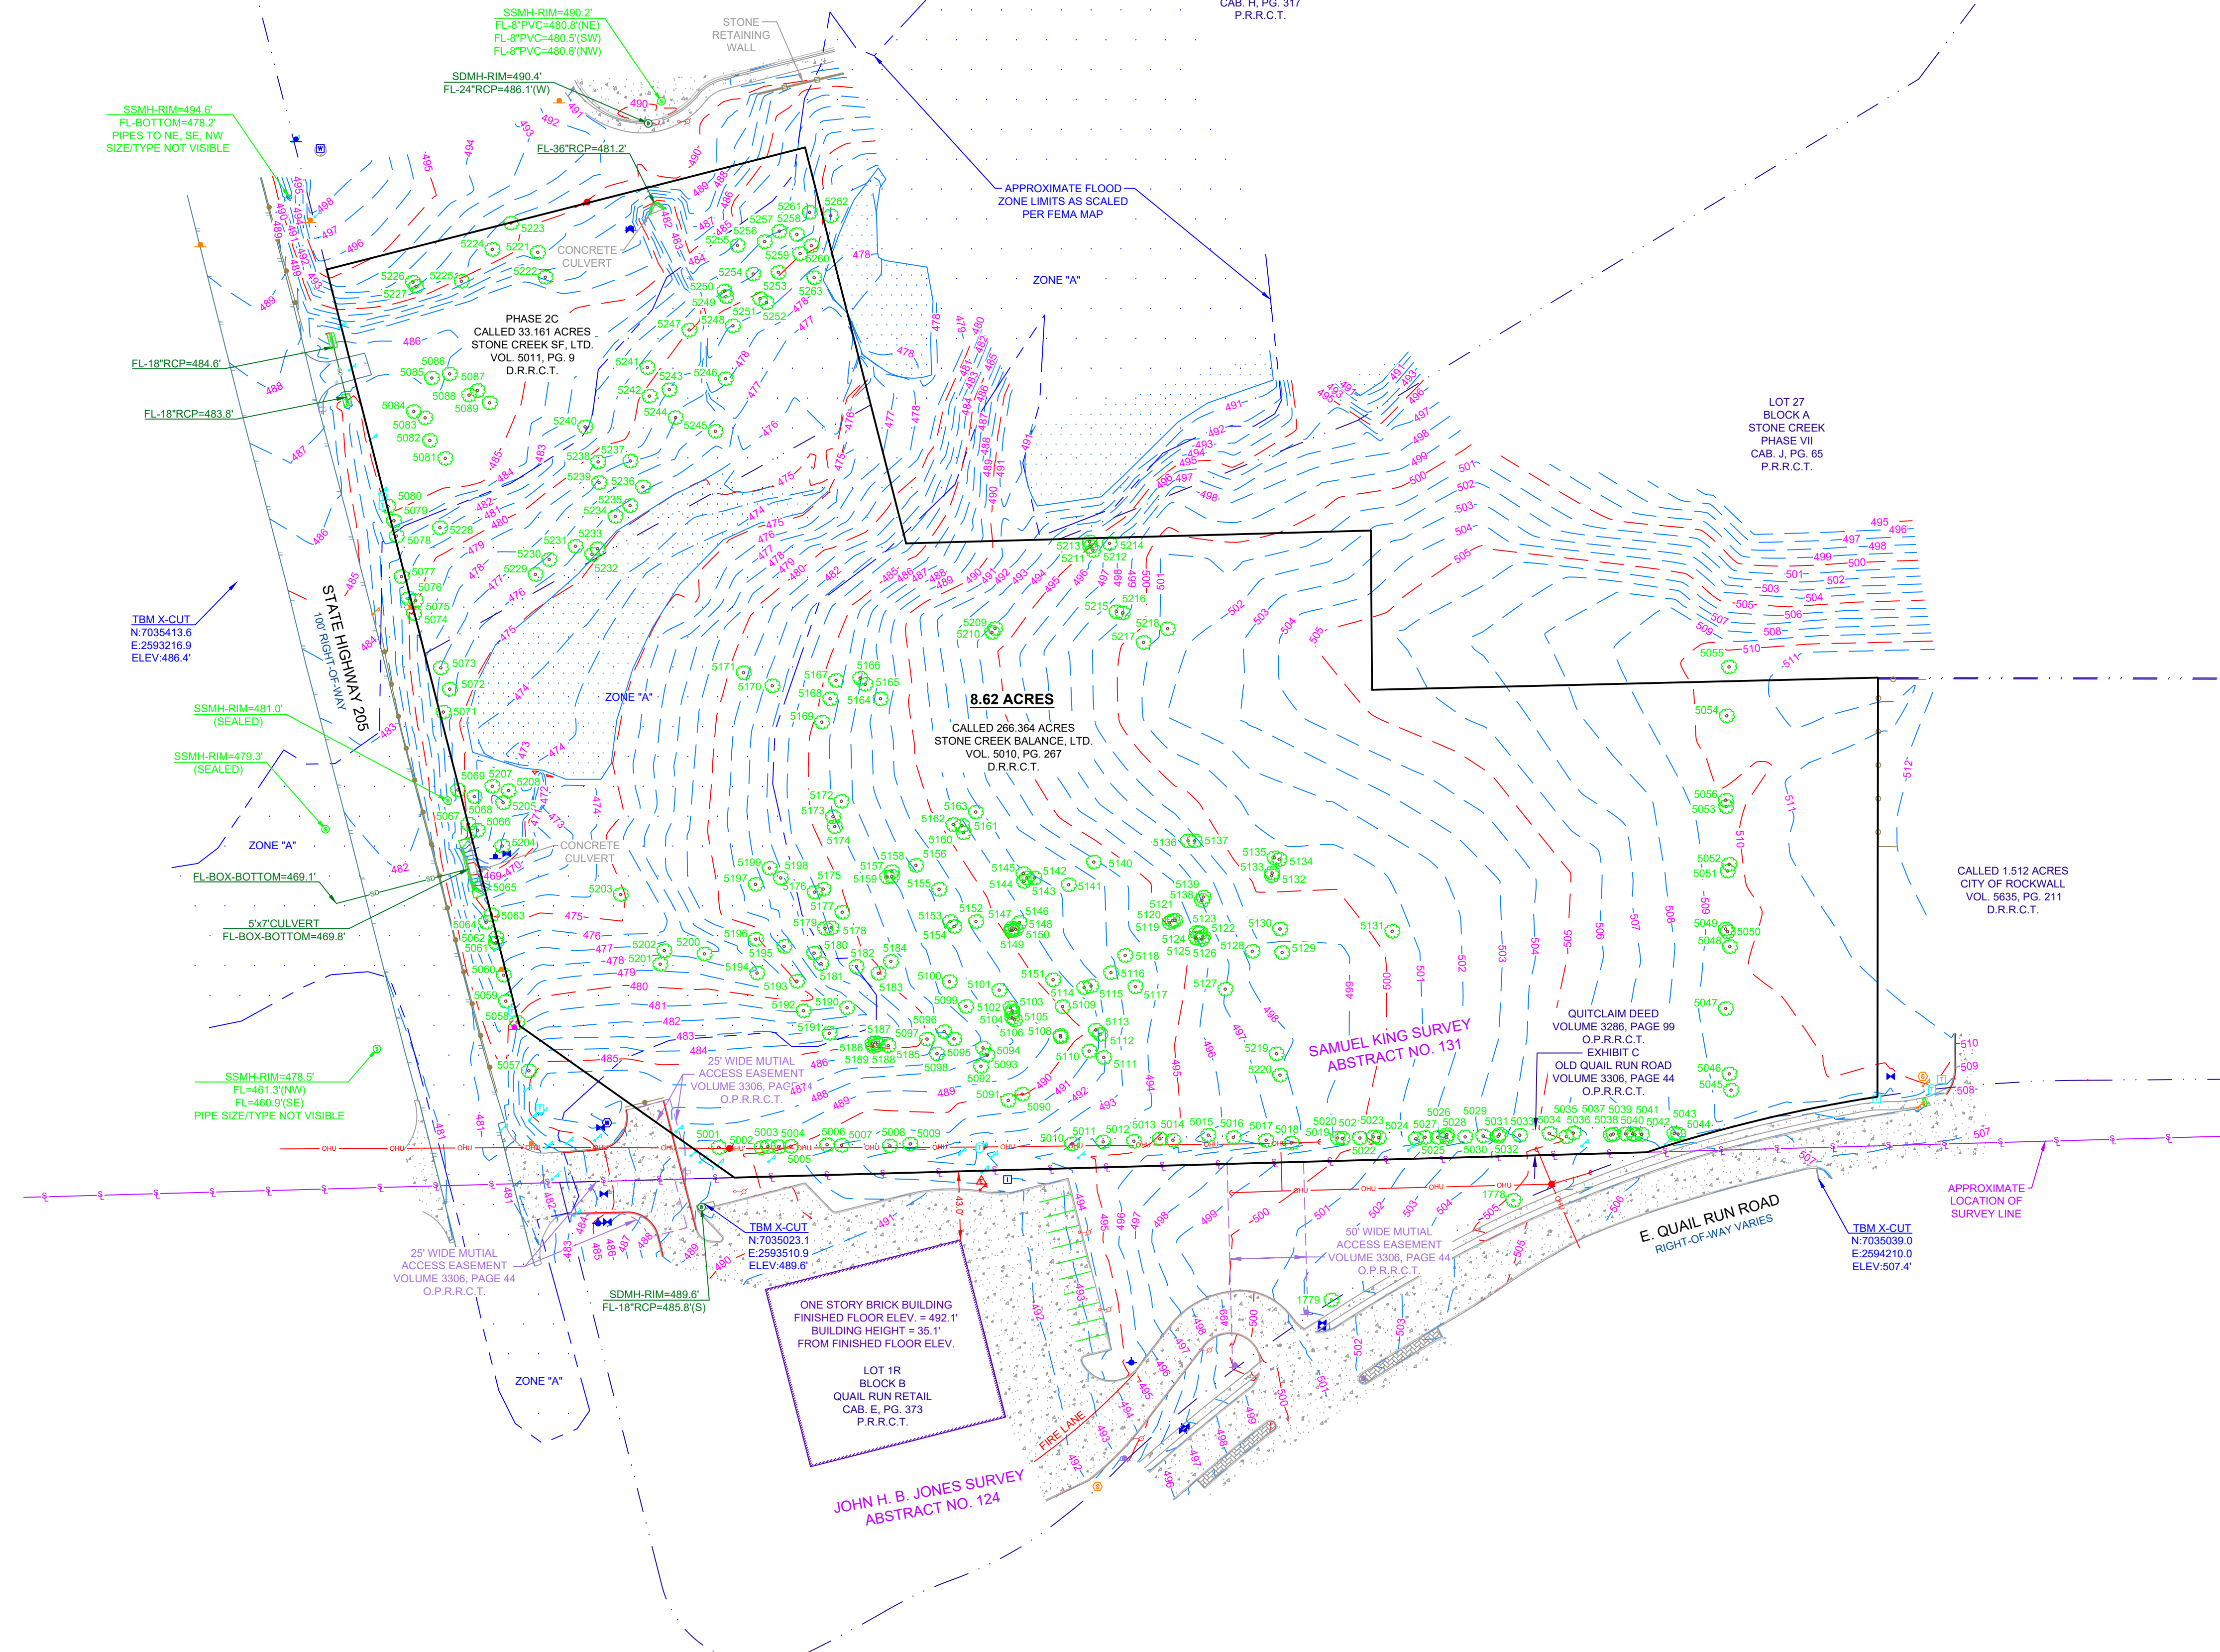

TOPOGRAPHIC EXHIBIT

JOB NUMBER: 2201.023
 DATE: 02/03/2022
 UPDATE: 2/17/2022
 DRAWN BY: CHM / CF

Eagle Surveying, LLC
 210 South Elm Street
 Suite: 104
 Denton, TX 76201
 940.222.3009
 www.eaglesurveying.com
 TX Firm # 10194177

LEGEND

- Temporary Benchmark
- Tree Trunk
- Tree Canopy
- C&B
- Volume
- Page
- D.R.R.C.T.
- P.R.R.C.T.
- Electric Junction Box
- Clay Wire
- Power Pole
- Light Pole
- Electric Utility Mark
- Gas Meter
- Gas Utility Sign
- Gas Utility Mark
- Gas Valve
- Sanitary Manhole
- Storm Drain Manhole
- Telecommunications Pole
- Telecommunications Vault
- Fiber Optic Utility Mark
- Water Vault
- Water Meter
- Water Valve
- Injection Control Valve
- Fire Hydrant
- Water Utility Sign
- Mail Box
- Buried Cable Sign
- Building
- Concrete
- Water
- Brick
- Chain Link Fence
- Iron Fence
- Guard Rail
- Overhead Utilities
- Edge of Asphalt
- Survey Abstract Line
- Storm Drain Line



CHECKLIST FOR SITE PLAN SUBMITTALS

City of Rockwall
 Planning and Zoning Department
 385 S. Goliad Street
 Rockwall, Texas 75087

CASE NUMBER:

OVERLAY DISTRICT:

REVIEWED BY:

REVIEW DATE:

1.1 GENERAL INFORMATION FOR ALL PLANS SUBMITTED

Requirements	✓= OK	N/A	Comments	UDC Reference
Items Necessary for Site Plan Review:				<i>Per Application</i>
✓ Site Plan	<input checked="" type="checkbox"/>	<input type="checkbox"/>		§03.04.A, of Art. 11
✓ Landscape Plan	<input checked="" type="checkbox"/>	<input type="checkbox"/>		-
✓ Treescape Plan	<input checked="" type="checkbox"/>	<input type="checkbox"/>		-
✓ Photometric Plan	<input type="checkbox"/>	<input checked="" type="checkbox"/>		-
✓ Building Elevations	<input checked="" type="checkbox"/>	<input type="checkbox"/>		-
Building Material Sample Board and Color Rendering of Building Elevations	<input checked="" type="checkbox"/>	<input type="checkbox"/>	If required the sample board should detail all building materials, with each material clearly labeled and indicating manufacturer info, color, etc. Check with Planning Staff to see which is appropriate for the submitted project.	§03.04.A, of Art. 11
Submittal Requirements	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Four (4) large (24" x 36") folded copies and one (1) PDF digital copy of each plan is required at the time of submittal.	§03.04.A, of Art. 11
Is the property properly platted?	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate if the property has been properly platted.	-
Title Block (Project Name, Legal Description and/or Address)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The title block is to be located in the lower right-hand corner of all sheets and contain the project name, street address, and/or the lot and block designation.	§03.04.A, of Art. 11
Case Number	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The case number should be placed in the lower right-hand corner below the title block of all sheets.	§03.04.A, of Art. 11
Owners (Name, Address, and Phone Number)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The owners name, address, and phone number are required to be in the lower right-hand corner left of the title block.	§03.04.A, of Art. 11
Developer (Name, Address, and Phone Number)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The name, address, and phone number of the person or company that prepared the plans are required in the lower right-hand corner left of the title block.	§03.04.A, of Art. 11
North Point	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The north point or north arrow must be facing true north (or straight up) on all plans, unless the scale of the drawings or scope of the project requires a different position.	§03.04.A, of Art. 11
Numeric and Graphic Scale	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The recommended engineering scales are 1" = 20', 1" = 40', etc. ... with a maximum of 1" = 100'.	§03.04.A, of Art. 11
Vicinity Map	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The vicinity map should locate the site relative to the nearest major roadways in a one-half mile radius.	§03.04.A, of Art. 11
Signature Block	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Standard signature block with signature space for the Planning & Zoning Chairman and Planning Director.	§03.04.A, of Art. 11
Date	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The date that the plans were prepared is required on all submittals.	§03.04.A, of Art. 11
Proposed Land Use:			Indicate the proposed use for this site. Additionally, indicate the proposed use for all structures.	§03.04.A, of Art. 11
✓ Commercial	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Land Uses Permitted in the RO, NS, GR, C, DT, RC & Designated Planned Development District Ordinances.	-
✓ Industrial	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Land Uses Permitted in the RT, LI, HI & Designated Planned Development District Ordinances.	-

2.1 SITE PLAN: MISCELLANEOUS AND DENSITY & DIMENSIONAL INFORMATION

Requirements	✓= OK	N/A	Comments	UDC Reference
Total Lot or Site Area (Acreage and Square Footage)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	If the site is part of a larger tract include a key map showing the entire tract of land and the location of the site being planned.	§03.04.B, of Art. 11

Perimeter Dimensions of the Site	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the perimeter dimensions of the site in feet.	§03.04.B, of Art. 11
Buildings (Square Footage)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the location and total square footage of all existing and planned buildings on the site.	§03.04.B, of Art. 11
Perimeter Dimensions of all Buildings	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the wall lengths of all buildings on the site.	§03.04.B, of Art. 11
Distance Between Buildings	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Indicate the distance between all existing and planned buildings located on the site.	§03.04.B, of Art. 11
Distance Between Buildings and Property Lines	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the distance between all property lines and existing and planned buildings located on the site.	§03.04.B, of Art. 11
Indicate all Property Lines	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate all existing property lines. If the site plan requires a platting case that will alter the property lines show the proposed changes in a different line weight.	§03.04.B, of Art. 11
Indicate all Building Setbacks	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate all building setbacks adjacent to right-of-way.	§03.04.B, of Art. 11
Indicate all Easements	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Additionally, indicate all utilities both existing and proposed.	§03.04.B, of Art. 11
Indicate all Drive/Turning Radii	<input checked="" type="checkbox"/>	<input type="checkbox"/>		§03.04.B, of Art. 11
Indicate all Drive Widths	<input checked="" type="checkbox"/>	<input type="checkbox"/>		§03.04.B, of Art. 11
Indicate all Fire Lanes	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate and label the widths of all fire lanes existing and proposed for the site.	§03.04.B, of Art. 11
Indicate location of all Fire Hydrants	<input checked="" type="checkbox"/>	<input type="checkbox"/>		§03.04.B, of Art. 11
Indicate all Sidewalks	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate and label the widths of all sidewalks existing and proposed for the site.	§03.04.B, of Art. 11
Adjacent Street Right-Of-Way	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Reference the City's Master Transportation Plan for right-of-way information.	§03.04.B, of Art. 11
Label all Adjacent Street Name	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Label all adjacent existing and proposed street names.	§03.04.B, of Art. 11
Adjacent Street Centerlines	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the street centerline for all existing and proposed streets.	§03.04.B, of Art. 11
Median Breaks in Adjacent Streets	<input checked="" type="checkbox"/>	<input type="checkbox"/>		§03.04.B, of Art. 11

2.2 SITE PLAN: PARKING INFORMATION

Requirements	✓= OK	N/A	Comments	UDC Reference
Dimension of a Typical Parking Space	<input checked="" type="checkbox"/>	<input type="checkbox"/>	See the comment section in <i>Adequate Parking and Maneuvering</i> below.	§05.03, of Art. 06
Parking Table	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Provide parking table indicating the total number of required parking spaces by use, the total number of required handicapped parking spaces and the total parking provided.	§05.01, of Art. 06
Handicap Parking Spaces Shown	<input checked="" type="checkbox"/>	<input type="checkbox"/>		§05.04, of Art. 06
Adequate Parking	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<i>Reference Table 3 of Article VI.</i>	Table 5, Art. 06
Adequate Parking and Maneuvering	<input checked="" type="checkbox"/>	<input type="checkbox"/>	All parking spaces and aisle dimensions shall conform to the off-street parking requirements in section 2.19 of the City's Standards of Design and Construction (<i>Check w/ the Engineering Department</i>).	§05.03.C, of Art. 06
Adequate Loading Area	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Loading spaces shall be a minimum of 12 feet in width, 65 feet in length, and 14 feet in height except as may otherwise be approved by the city engineer (<i>Art. VI 6.5 Loading Requirements</i>).	§06.04, of Art. 06
Adequate Loading Maneuvering	<input checked="" type="checkbox"/>	<input type="checkbox"/>	It is also the purpose of this Article to require allocation of sufficient off-street/on-site loading facilities by businesses and industry to ensure that the loading and unloading of vehicles will not interfere with traffic flow or block roadways or fire lanes.	§01.02, of Art. 06
Type and Depth of Paving Material	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the type and depth of the paving material and provide a detail or cut-sheet. All required parking and loading areas shall be constructed of concrete, but may have a surface treatment of brick, stone or other similar material.	§03.02, of Art. 06

2.3 SITE PLAN: SIGNAGE

Requirements	✓= OK	N/A	Comments	UDC Reference
NOTE: All signage shall conform to Chapter 32 of the Rockwall Municipal Code of Ordinance, unless otherwise specified in an Overlay District or Planned Development District with specific signage requirements.				

Proposed or Existing Signage	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Indicate the location and type of all proposed and/or existing signage on the site plan. Additionally, provide a detail or cut-sheet showing the elevations, lighting and dimensions of the proposed signage.	§06.02.F, of Art. 05
------------------------------	--------------------------	-------------------------------------	---	----------------------

2.4 SITE PLAN: SCREENING

Requirements	√= OK	N/A	Comments	UDC Reference
Indicate the Type and Location of any Existing and/or Proposed Fences	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Label the height and type of fence proposed or existing.	§08.02.F, of Art. 08
Utility Equipment Screening (Pad or Ground Mounted)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Pad mounted utility equipment, and air conditioning units, shall be screened from horizontal view from any adjacent public street and from any adjacent property. Utility equipment and air conditioning units shall be screened utilizing plantings, berms, or walls matching the main structure.	§01.05.C, of Art. 05
Utility Equipment Screening (Roof Mounted)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	All buildings must be designed such that no roof mounted mechanical equipment, HVAC, or satellite dishes shall be visible from any direction.	§01.05.C, of Art. 05
Above Ground Storage Tanks	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Aboveground storage tanks shall be screened utilizing walls matching the main structure. Screening plans for above ground storage tanks shall generally conform to the diagram below (i.e. incorporate primary screening – screening wall – and secondary screening) and be approved by the Planning and Zoning Commission in conjunction with a site plan.	§01.05.D, of Art. 05
Dumpster Screening	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Trash/Recycling enclosures shall be four (4) sided. These receptacles shall be screened by a minimum six (6) foot, solid masonry dumpster enclosure that utilizes the same masonry materials as the primary building and incorporates an opaque, self-latching gate. Dumpster storage should be located to the rear of the buildings with proper access. Trash dumpster shall not be located in any required parking space and shall allow proper access by service trucks. The minimum enclosure area shall be 12'x10'. A minimum of 6" bollards will be required at potential impact zones and the pad site shall be paved to city standards.	§01.05.B, of Art. 05
Outside Storage	<input type="checkbox"/>	<input checked="" type="checkbox"/>		
Off-Street Loading Dock Screening	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Off-street loading docks must be screened from all public streets and any residential district that abuts or is directly across a public street or alley from the lot. The screening must be at least six feet in height and may be provided by using a masonry fence, berms, plantings or a combination of the above.	§01.05.A, of Art. 05
Residential Adjacency Standards	<input type="checkbox"/>	<input checked="" type="checkbox"/>	The director may require wing walls, landscape screens, changes in building orientation, and/or other architectural elements to minimize the impact of uses adjacent to residential property within 150 feet (also reference Art. VIII 5.2).	§01.06, of Art. 05

3.1 LANDSCAPE PLAN

Requirements	√= OK	N/A	Comments	UDC Reference
Provide Site Data Note: see site plan for dimensional control	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Provide the same site data information required in Section 2.1 Site Plan: Miscellaneous and Density and Dimensional Requirements of this checklist.	See Sec. 2.1 of this checklist
Impervious Area vs. Landscape/Open Space Area Provided and Required (As Per Zoning District)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the applicable zoning district percentage of landscaping required and provided, and the impervious area vs. the amount of landscaping and open spaces required and provided.	§01.01.B, of Art. 05
Landscape Table	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Provide a landscape table showing plant materials, quantities, size and spacing for existing and proposed landscaping. Complete description of plant materials shown on the plan, including names, locations, qualities, container or caliper sizes at installation, heights, spread, and spacing requirements should also be listed on the plan.	§05.03.B, of Art. 08
Indicate all Landscaping	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the locations of all existing and proposed landscaping.	§05.03.B, of Art. 08
Location of Water Courses and Significant Drainage Features	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the locations of all existing and/or proposed water courses and the location of any existing and/or proposed significant drainage features.	-
Indicate all Landscape Buffers	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the locations and dimensions of the required landscape buffers.	§05.01, of Art. 08

Acceptable Landscape Materials:			Sec. 04., of Art. 08	
✓ Trees allowed in Street Landscape Buffers	✓	<input type="checkbox"/>	Cedar Elm, Texas Red Oak, Homestead Elm, Lace Bark Elm, Bald Cypress, Chinese Pistachio, October Glory Maple, Pecan, Texas Ash, Live Oak, Chinquapin Oak, and Burr Oak (Understory Trees: Texas Redbud, Mexican Plum, Downy Hawthorn, Wax Myrtle, Yaupon, and Deciduous Yaupon)	Appendix C
✓ Trees not allowed in Landscape Buffers	✓	<input type="checkbox"/>	Silver Maple, Box Elder, Mimosa, Catalpa, Hackberry, Sugarberry, Honey Locust, Tulip Tree, Chinaberry, Sycamore, Cottonwood, Willows, American Elm, Siberian Elm, Jerusalem Thorn/Petuma, Bois D'Arc, Flowering Crabapple Tree, Ginko Tree, Peach/Plum, Mulberry, Texas Mountain Laurel, Lilac Chaste Tree, and Pine Tree.	Appendix C
Protected Trees (That Will Remain On-Site)	✓	<input type="checkbox"/>	Indicate the location and provide a description by type and size of all existing protected trees (4" or larger) proposed to be retained. Prior to any construction or land development, the developer shall clearly mark all protected and feature trees with an aluminum tag -- indicating the trees relationship to the treescape plan -- and flag (i.e. bright fluorescent red vinyl tape). In those instances where a protected tree is so close to the construction area that construction equipment could possibly damage the tree, a protective fence shall be required.	§07.01, of Art. 09
Parking Lot Landscaping	✓	<input type="checkbox"/>	Complete description of landscaping and screening to be provided in or near off-street parking and loading areas, including the information as to the amount (in sq. ft.) of landscape area to be provided internal to parking areas, the total square footage included in the parking area, and the number and location of required off-street parking and loading spaces.	§05.03.E, of Art. 08
Location of all Site Amenities	✓	<input type="checkbox"/>	Identify the size, height, location, and material of proposed seating, lighting, planter's sculptures, water features and landscape paving and other public amenities.	-
Identify Visibility Triangles	<input type="checkbox"/>	✓	Identify visibility triangles on all lots for all driveway intersections and public streets.	§01.08, of Art. 05
Landscape Buffer - Street Trees	✓	<input type="checkbox"/>	Large trees (a species which normally reaches a height of 30 feet or more upon maturity) shall be provided in the required street landscape buffer in numbers equal to one (1) tree for every 50 feet of street frontage.	§05.01, of Art. 08
Tree Locations	✓	<input type="checkbox"/>	Trees must be planted at least five (5) feet from water, sewer and storm sewer lines.	§05.03.E, of Art. 08
Irrigation Requirements Note	✓	<input type="checkbox"/>	Provide note indicating irrigation will meet requirements of UDC.	§05.04, of Art. 08
Hydro mulch (or non-sod option)	✓	<input type="checkbox"/>	The developer shall establish grass and maintain the seeded area, including watering, until a "Permanent Stand of Grass" is obtained at which time the project will be accepted by the City. A "Stand of Grass" shall consist of 75% to 80% coverage and a minimum of one-inch (1") in height as determined by the City.	Sec. 4.2, Coverage, Engr Standards of Design and Construction
Rights-of-Way & Landscape Buffers	✓	<input type="checkbox"/>	All landscape buffers and public right-of-way located adjacent to a proposed development shall be improved with grass (i.e. sod -- hydro mulch shall be prohibited in these areas) prior to the issuance of a Certificate of Occupancy (CO).	§05.03.G, of Art. 08

4.1 TREESCAPE PLAN

Requirements	✓ = OK	N/A	Comments	UDC Reference
Provide Site Data	✓	<input type="checkbox"/>	Provide the same site data information required in Section 2.1 <i>Site Plan: Miscellaneous and Density and Dimensional Requirements</i> of this checklist.	See Sec. 2.1 of this checklist
Note: see site plan for dimensional control.				
Buildings	✓	<input type="checkbox"/>	Indicate the location of all existing or proposed structures, and/or the building pads as shown on the grading plan.	§03.01.A, of Art. 09
Indicate all Site Elevations, Grades, Major Contours and the Limits of Construction	✓	<input type="checkbox"/>		§03.01.C, of Art. 09

Protected Trees (To Remain On Site)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the location and provide a description by type and size of all existing protected trees (4" or larger) proposed to be retained. Such trees shall be marked and a drip line of said trees shall be protected prior to and during all construction, including dirt work.	§03.01.E, of Art. 09
Protected Trees (To be Removed from the Site)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the location of all protected trees (4" or larger) that are to be removed from the site and the proposed locations of all replacement trees.	§03.01.F, of Art. 09
Treescape Table	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Provide a table showing the total inches of trees to be removed and the total inches of trees to be replaced.	§03.01.G, of Art. 09

5.1 PHOTOMETRIC AND LIGHTING PLANS

Note: existing site lighting to remain,
no additional site lighting it proposed

Requirements	✓= OK	N/A	Comments	UDC Reference
Provide Site Data Table	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Provide the same site data information required in Section 2.1 <i>Site Plan: Miscellaneous and Density and Dimensional Requirements</i> of this checklist.	See Sec. 2.1 of this checklist -
Indicate Lighting Levels (in Foot Candles [FC])	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Show lighting levels in foot-candles (FC) measured throughout the site and extended to all property lines of the subject property.	§03.03, of Art. 07
Adjacent Property with Common Lot Lines:				
✓ Residential Use	<input type="checkbox"/>	<input checked="" type="checkbox"/>	The allowable maximum light intensity measured at the property line of a residential property shall be 0.2 of one foot candle.	§03.03.B, of Art. 07
✓ Commercial Use	<input type="checkbox"/>	<input checked="" type="checkbox"/>	The allowable maximum light intensity measured at the property line of a non-residential property shall be 0.2 of one foot candle. <i>Subject to requirements in Art. VII 3.3.C.</i>	§03.03.C, of Art. 07
Under-Canopy Lighting	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Under canopy lighting (i.e. fuel stations, drive through lanes and covered parking structures) shall not exceed 35 foot candles (with the exception below).	§03.03.E.1, of Art. 07
Lighting for Motor Vehicle Dealerships	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Shall not exceed 0.3 of one foot candle within the front yard of the development. The remainder will comply with the 0.2 of one foot candle.	§03.03.E.2, of Art. 07
Lighting in Parking Areas	<input type="checkbox"/>	<input checked="" type="checkbox"/>	The maximum outdoor maintained, computed and measured illumination level within any nonresidential development shall not exceed 20 FC outdoors at any point on the site, with a maximum of 0.2 FC at the property line. (Exceptions: (1) under canopy lighting and (2) motor vehicle dealerships)	§03.03.G, of Art. 07
Building and Pole Mounted Lighting	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Indicate the location and type of all exterior lighting, including pole mounted, wall-mounted, signage, etc.	§03.03.E, of Art. 07
Indicate the Mounting Height for all Proposed Light Fixtures	<input type="checkbox"/>	<input checked="" type="checkbox"/>	No light pole, base or combination thereof shall exceed 30 feet, unless further restricted within an Overlay District.	§03.03.D of Art. 07
Indicate the Wattage of all Light Sources	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Provide lighting cut sheets that indicates the wattage for each exterior lighting fixture. Light sources (e.g. light bulbs) shall be oriented down and toward the center of the site or shielded so as to not be visible from the property line.	§03.03.A, of Art. 07
Proposed Light Fixtures	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Provide elevation drawings and/or cut-sheets of proposed light fixtures on/with photometric plan.	§03.03, of Art. 07

6.1 BUILDING ELEVATIONS: NON-INDUSTRIAL

Requirements	✓= OK	N/A	Comments	UDC Reference
Provide Exterior Elevations	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<u>North</u> <u>South</u> <u>East</u> <u>West</u> (Circle all that apply)	-
Indicate Exterior Elevations Adjacent to Public Right-of-Way	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<u>North</u> <u>South</u> <u>East</u> <u>West</u> (Circle all that apply)	-
Minimum 90% Masonry Requirement <i>OVERLAY DISTRICTS ONLY</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Exterior walls should consist of 90% masonry materials excluding doors and windows.	§06.02.C, of Art. 05
Indicate Amount and Location of the Minimum 20% Stone Requirement <i>OVERLAY DISTRICTS ONLY</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Applies to facades that are visible from a public right-of-way and/or open space.	§06.02.C, of Art. 05
Indicate the Surface Area of Each Facade	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the surface area (square feet) of each façade and the percentage and square footage of each material used on that façade.	§04.01, of Art. 05
Proposed Building Materials	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Specifications and description of all proposed building materials, on all proposed buildings.	§04.01, of Art. 05
Indicate the Roofing Materials and Color	<input checked="" type="checkbox"/>	<input type="checkbox"/>		

Indicate Parapet Wall Height **(If Applicable, finish the interior side of the parapet wall)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	If applicable indicate the parapet wall by dashing in the top of roof deck. **Projecting elements and parapets that are visible from adjacent properties or public right-of-way shall be finished on the interior side using the same materials as the exterior facing wall.	§04.01, of Art. 05
Indicate all Roof Mounted Mechanical Equipment (If Applicable)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	If applicable indicate any proposed roof mounted mechanical equipment and indicate how these will be screened from view.	§01.05.C, of Art. 05
Indicate Any Additional Design Elements Proposed (If Applicable)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate any additional design elements for the base, walls, or parapets (such as cornice, arcades, and covered walkways/windows). Be sure to include the location, size, color, and material of any proposed structure.	
Indicate Building Height(s)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The height of the building shall be measured from the average elevation of the finished grade along the front of the building to the highest point of the roof or parapet of the building if it is a flat, mansard or shed roof; or to the midpoint of the roof if it is gable, hip or gambrel roof.	§07.03 of Art. 05
Minimum Standards for Articulation:				
Primary Facades (i.e. facades visible from a public ROW, open space/green space, public/private park, and or residential zoning district or residentially used property)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	1. Wall Height [H] = H 2. Wall Length [L] = 3 x H 3. Secondary Entry/Arch. Element Length = 25% x L 4. Wall Projection = 25% x H 5. Primary Entry/Arch. Element Width = 2 x (25% x L) 6. Projection Height = 25% x H 7. Primary Entry/Arch. Element Length = 2 x (25% x L)	§04.01.C.1, of Art. 05
Secondary Facades	<input checked="" type="checkbox"/>	<input type="checkbox"/>	1. Wall Height [H] = H 2. Wall Length [L] = 3 x H 3. Secondary Entry/Arch. Element Length = 15% x L 4. Secondary Entry/Arch. Element Width = 15% x H 5. Projection Height = 15% x H	§04.01.C.2, of Art. 05

6.2 BUILDING ELEVATIONS: INDUSTRIAL

Requirements	✓ = OK	N/A	Comments	UDC Reference
NOTE: Industrial buildings are subject to all the elements listed in Section 6.1 Building Elevations: Non-Industrial with the exception of the following standards.				
Minimum 90% Masonry Requirement	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Exterior walls should consist of 90% masonry materials excluding doors and windows.	§05.01.A.1, of Art. 05
Indicate Amount and Location of the Minimum 20% Stone Requirement	<input type="checkbox"/>	<input checked="" type="checkbox"/>	Applies to facades that are visible from a public right-of-way and/or open space.	§05.01.A.1.a.1, of Art. 05
Minimum Standards for Articulation:				
Primary Facades (i.e. facades visible from a public ROW, open space/green space, public/private park, and or residential zoning district or residentially used property)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	1. Wall Height [H] = H 2. Wall Length [L] = 4 x H 3. Wall Projection = 25% x H 4. Entry/Arch. Element Length = 33% x L 5. Projection Height = 25% x H 6. Entry/Arch. Element Width = 2 x (25% x H)	§05.01.C.1, of Art. 05
Secondary Facades	<input type="checkbox"/>	<input checked="" type="checkbox"/>	1. Wall Height [H] = H 2. Wall Length [L] = 3 x H 3. Entry/Arch. Element Length = 15% x L 4. Entry/Arch. Element Width = 15% x H 5. Projection Height = 15% x H	§05.01.C.2, of Art. 05

CITY OF ROCKWALL

ORDINANCE NO. 22-XX

SPECIFIC USE PERMIT NO. S-2XX

AN ORDINANCE OF THE CITY COUNCIL OF THE CITY OF ROCKWALL, TEXAS, AMENDING PLANNED DEVELOPMENT DISTRICT 70 (PD-70) [ORDINANCE NO. 19-41] AND THE UNIFIED DEVELOPMENT CODE (UDC) [ORDINANCE NO. 20-02] OF THE CITY OF ROCKWALL, ROCKWALL COUNTY, TEXAS, AS PREVIOUSLY AMENDED, SO AS TO GRANT A SPECIFIC USE PERMIT (SUP) FOR TWO (2) RESTAURANTS, LESS THAN 2,000 SF, WITH DRIVE-THROUGH OR DRIVE-IN ON A 8.684-ACRE TRACT OF LAND IDENTIFIED AS TRACT 3-10 OF THE S. KING SURVEY, ABSTRACT NO. 131, CITY OF ROCKWALL, ROCKWALL COUNTY, TEXAS; AND MORE SPECIFICALLY DESCRIBED AND DESCRIBED IN EXHIBIT 'A' AND DEPICTED IN EXHIBIT 'B' OF THIS ORDINANCE; PROVIDING FOR SPECIAL CONDITIONS; PROVIDING FOR A PENALTY OF FINE NOT TO EXCEED THE SUM OF TWO THOUSAND DOLLARS (\$2,000.00) FOR EACH OFFENSE; PROVIDING FOR A SEVERABILITY CLAUSE; PROVIDING FOR A REPEALER CLAUSE; PROVIDING FOR AN EFFECTIVE DATE.

WHEREAS, the City has received a request from Bowen Hendrix of DeWest Realty, LLC on behalf of John Arnold of the Skorborg Company for the approval of a Specific Use Permit (SUP) for a *Restaurant, with Less Than 2,000 SF, with Drive-Through or Drive-In* for the purpose of constructing two (2) restaurants on a 8.684-acre tract of land described as Tract 3-10 of the S. King Survey, Abstract No. 131, City of Rockwall, Rockwall County, Texas, zoned Planned Development District 70 (PD-70) for limited General Retail (GR) District land uses, situated within the SH-205 Overlay (SH-205 OV) District, generally located north of the intersection of N. Goliad Street [SH-205] and E. Quail Run Road, and being more specifically described in *Exhibit 'A'* and depicted in *Exhibit 'B'* of this ordinance, which herein after shall be referred to as the *Subject Property* and incorporated by reference herein; and

WHEREAS, the Planning and Zoning Commission of the City of Rockwall and the governing body of the City of Rockwall, in compliance with the laws of the State of Texas and the ordinances of the City of Rockwall, have given the requisite notices by publication and otherwise, and have held public hearings and afforded a full and fair hearing to all property owners generally, and to all persons interested in and situated in the affected area and in the vicinity thereof, the governing body in the exercise of its legislative discretion has concluded that Planned Development District 70 (PD-70) [Ordinance No. 19-41] and the Unified Development Code (UDC) [Ordinance No. 20-02] of the City of Rockwall should be amended as follows:

NOW, THEREFORE, BE IT ORDAINED by the City Council of the City of Rockwall, Texas;

SECTION 1. Planned Development District 70 (PD-70) [Ordinance No. 19-41] and the Unified Development Code (UDC) [Ordinance No. 20-02] of the City of Rockwall, as heretofore amended, be and the same is hereby amended so as to grant a Specific Use Permit (SUP) for two (2) *Restaurants, with Less Than 2,000 SF, with Drive-Through or Drive-In* in accordance with Article 04, *Permissible Uses*, of the Unified Development Code (UDC) [Ordinance No. 20-02] on the

Subject Property, and,

SECTION 2. That the Specific Use Permit (SUP) shall be subject to the requirements set forth in Subsection 04.04, *General Retail (GR) District*, and Subsection 06.07, *SH-205 Overlay (SH-205 OV) District*, of Article 05, *District Development Standards*, of the Unified Development Code (UDC) [Ordinance No. 20-02] and to the requirements set forth in Planned Development District 70 (PD-70) [Ordinance No. 19-41] -- as heretofore amended and may be amended in the future - and with the following conditions:

2.1 OPERATIONAL CONDITIONS

The following conditions pertain to the operation of two (2) *Restaurants, with Less Than 2,000 SF, with Drive-Through or Drive-In* on the *Subject Property* and conformance to these conditions is required for continued operation:

- 1) The development of the *Subject Property* shall generally conform to the Concept Plan as depicted in *Exhibit 'C'* of this ordinance.
- 2) The development of the *Subject Property* shall conform to the landscape screening as depicted in *Exhibit 'C'* of this ordinance.

2.2 COMPLIANCE

Approval of this ordinance in accordance with Subsection 02.02, *Specific Use Permits (SUP)* of Article 11, *Development Applications and Review Procedures*, of the Unified Development Code (UDC) will require the *Subject Property* to comply with the following:

- 1) Upon obtaining a *Certificate of Occupancy (CO)*, should the business owner operating under the guidelines of this ordinance fail to meet the minimum operational requirements set forth herein and outlined in the Unified Development Code (UDC), the City may (*after proper notice*) initiate proceedings to revoke the Specific Use Permit (SUP) in accordance with Subsection 02.02(F), *Revocation*, of Article 11, *Development Applications and Revision Procedures*, of the Unified Development Code (UDC) [Ordinance No. 20-02].

SECTION 3. That the official zoning map of the City be corrected to reflect the changes in zoning described herein.

SECTION 4. That all ordinances of the City of Rockwall in conflict with the provisions of this ordinance be, and the same are hereby repealed to the extent of that conflict.

SECTION 5. Any person, firm, or corporation violating any of the provisions of this ordinance shall be deemed guilty of a misdemeanor and upon conviction shall be punished by a penalty of fine not to exceed the sum of *TWO THOUSAND DOLLARS (\$2,000.00)* for each offence and each and every day such offense shall continue shall be deemed to constitute a separate offense.

SECTION 6. If any section or provision of this ordinance or the application of that section or provision to any person, firm, corporation, situation or circumstance is for any reason judged invalid, the adjudication shall not affect any other section or provision of this ordinance or the application of any other section or provision to any other person, firm, corporation, situation or circumstance, and the City Council declares that it would have adopted the valid portions and applications of the ordinance without the invalid parts and to this end the provisions of this ordinance shall remain in full force and effect.

SECTION 7. That this ordinance shall take effect immediately from and after its passage.

**PASSED AND APPROVED BY THE CITY COUNCIL OF THE CITY OF ROCKWALL, TEXAS,
THIS THE 7TH DAY OF MARCH, 2022.**

Kevin Fowler, *Mayor*

ATTEST:

Kristy Cole, *City Secretary*

APPROVED AS TO FORM:

Frank J. Garza, *City Attorney*

1st Reading: February 22, 2022

2nd Reading: March 7, 2022

Exhibit 'A'
Legal Description

BEING a tract of land situated in the S. King Survey, Abstract No.131, City of Rockwall, Rockwall County, Texas and being part of a tract of land described in Special Warranty Deed to Stone Creek Balance, LTD, recorded in Instrument No. 2007000375394, Official Public Records, Collin County, Texas, and being part of a tract of land described in Special Warranty Deed to Meritage Homes of Texas, LLC, recorded in Instrument No. 20150000013037, Official Public Records, Rockwall County, Texas, and being part of Lot 27, Block A, of Stone Creek Phase VII, an addition to the City of Rockwall, Texas, according to the plat thereof recorded in Instrument No. 20160000011737, Official Public Records, Rockwall County, Texas, and being more particularly described as follows:

BEGINNING at a Concrete Monument found at the north corner of a right-of-way corner clip for the east right-of-way line of State Highway 205 (N Goliad Street - a variable width right-of-way)

THENCE with said east right-of-way line, North 14°18'59" West, a distance of 100.00 feet to a 5/8-inch iron rod with plastic cap stamped "KHA" set;

THENCE departing said east right-of-way line, North 38°46'11" East, a distance of 387.72 feet to a 5/8-inch iron rod with plastic cap stamped "KHA" set in a south line of Lot 8, Block D, Stone Creek Phase IV, an addition to the City of Rockwall, Texas, according to the plat thereof recorded in Cabinet H, Slide 317, Plat Records, Rockwall County, Texas;

THENCE with the south line of said Lot 8, the following course and distances, to wit:

South 14°18'59" East, a distance of 100.00 feet to a 1/2-inch iron rod with plastic cap stamped "CORWIN" found;

North 88°26'01" East, a distance of 96.46 feet to a 1/2-inch iron rod with plastic cap stamped "CORWIN" found at the most westerly southwest corner of said Lot 28;

THENCE with the south line of said Lot 28, North 88°27'32" East, passing at a distance of 195.78 feet a 1/2-inch iron rod with plastic cap stamped "CORWIN" found for a south corner of said Lot 28, departing said south line and continuing in all a total distance of 513.73 feet to a 5/8-inch iron rod with plastic cap stamped "KHA" set;

THENCE South 0°02'44" West, passing at a distance of 101.33 feet the north west corner of a tract of land described as Quail Run Fire Station recorded in Special Warranty Deed to The City of Rockwall, recorded in Vol. 5635, Pg. 211, Deed Records, Rockwall County, Texas, and continuing with the west line of said Quail Run Fire Station, passing at a distance of 262.60 feet the southwest corner of said Quail Run Fire Station, continuing with the north right-of-way line of Quail Run Drive (a variable width public right-of-way) in all a total distance of 395.49 feet to a point for corner;

THENCE with said north right-of-way line, South 89°34'22" West, a distance of 67.13 feet to a point for corner for the northeast corner of Lot 1, Block B of Quail Run Retail, an addition to the City of Rockwall, Texas, according to the plat thereof recorded in Cabinet E, Slide 67, Plat Records, Rockwall County, Texas;

THENCE with the north line of said Lot 1, South 88°24'25" West, a distance of 650.72 feet to a 1/2-inch iron rod with plastic cap stamped "CARTER & BUGESS" found at the southeast corner of said right-of-way corner clip;

THENCE departing said north line and with said corner clip, North 54°44'35" West, a distance of 165.14 feet to the **POINT OF BEGINNING** and containing 7.456 acres or 324797 square feet of land.

Bearing system based on the Texas Coordinate System of 1983, North Central Zone (4202), North American Datum of 1983.

Exhibit 'B'
Location Map



Exhibit 'C':
Concept Plan

