



2.2 PYLON SIGN (OPTIONS)

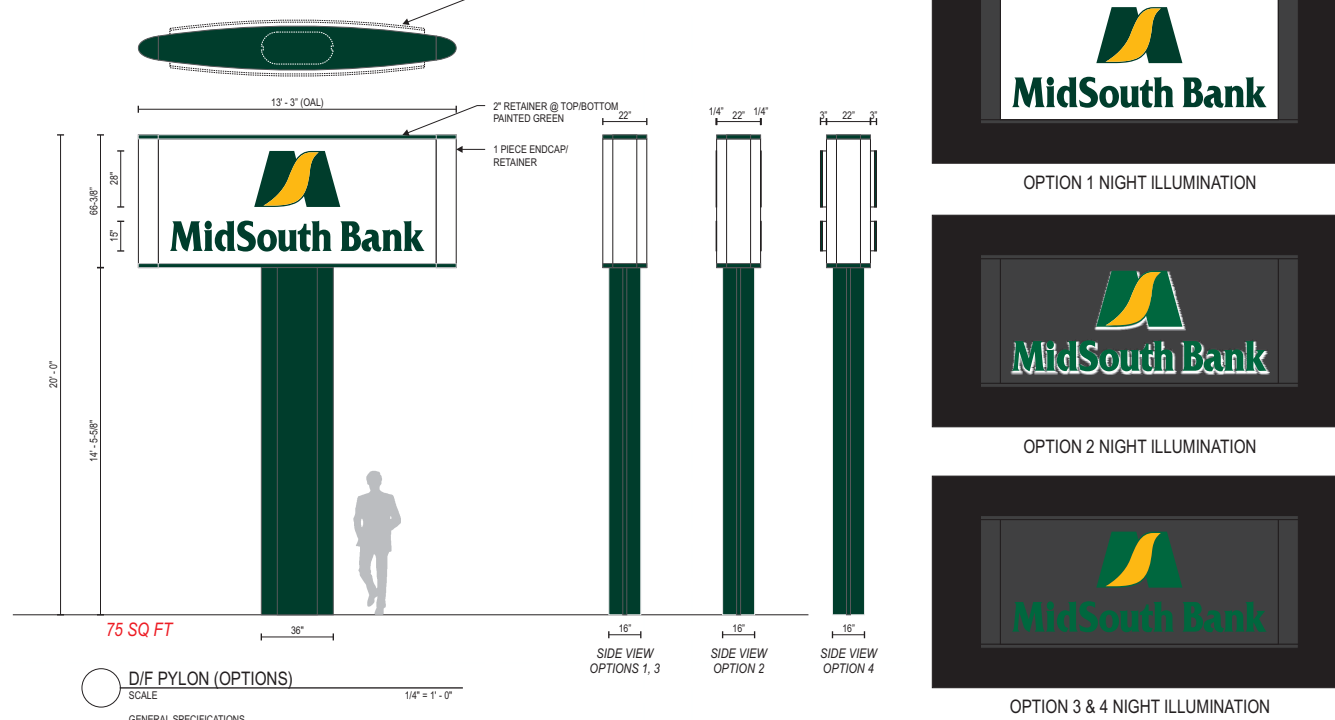

GENERAL PRESCRIPTIONS:
 ALUMINUM CABINET FINISHED TO MATCH THE SIGN COLOR OR A DARK WHITE.
 (OPTION 1) SIGN FACE AREA MUST BE LEANED IN BY 1/4" FROM CURB.
 (OPTION 2) SIGN FACE AREA MUST BE LEANED IN BY 1/4" FROM CURB.
 (OPTION 3) ALL ALUMINUM CABINET WITH 1/4" THICK CLEAR GLASS DRAPES WITH FIRST SURFACE WHITE OR NO SURFACE WHITE OPTION.
 (OPTION 4) ALL ALUMINUM CABINET WITH 1/4" THICK CLEAR GLASS DRAPES WITH FIRST SURFACE WHITE OR NO SURFACE WHITE OPTION.
 (OPTION 1) 11 1/2" TYPICAL TO TOP OF SIGN.
 (OPTION 2) 11 1/2" TYPICAL TO TOP OF SIGN.
 (OPTION 3) 11 1/2" TYPICAL TO TOP OF SIGN.
 (OPTION 4) 11 1/2" TYPICAL TO TOP OF SIGN.
 (OPTION 1) 11 1/2" TYPICAL TO TOP OF SIGN.
 (OPTION 2) 11 1/2" TYPICAL TO TOP OF SIGN.
 (OPTION 3) 11 1/2" TYPICAL TO TOP OF SIGN.
 (OPTION 4) 11 1/2" TYPICAL TO TOP OF SIGN.


A SEPARATE SIGN PERMIT IS REQUIRED SIGNAGE BY OTHERS

2.3 MONUMENT SIGN (OPTIONS)

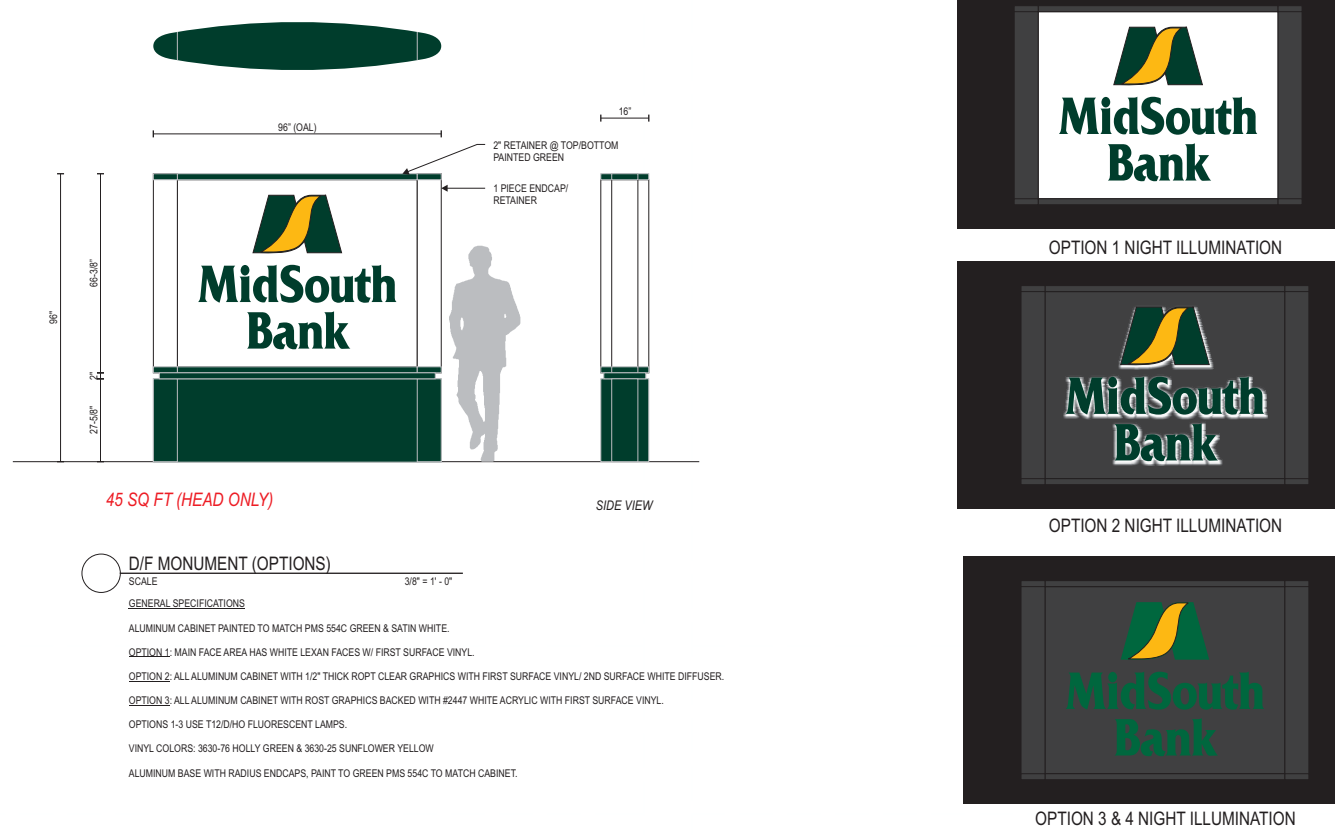


GENERAL PRESCRIPTIONS:
 ALUMINUM CABINET FINISHED TO MATCH THE SIGN COLOR OR A DARK WHITE.
 (OPTION 1) SIGN FACE AREA MUST BE LEANED IN BY 1/4" FROM CURB.
 (OPTION 2) SIGN FACE AREA MUST BE LEANED IN BY 1/4" FROM CURB.
 (OPTION 3) ALL ALUMINUM CABINET WITH 1/4" THICK CLEAR GLASS DRAPES WITH FIRST SURFACE WHITE OR NO SURFACE WHITE OPTION.
 (OPTION 4) ALL ALUMINUM CABINET WITH 1/4" THICK CLEAR GLASS DRAPES WITH FIRST SURFACE WHITE OR NO SURFACE WHITE OPTION.
 (OPTION 1) 11 1/2" TYPICAL TO TOP OF SIGN.
 (OPTION 2) 11 1/2" TYPICAL TO TOP OF SIGN.
 (OPTION 3) 11 1/2" TYPICAL TO TOP OF SIGN.
 (OPTION 4) 11 1/2" TYPICAL TO TOP OF SIGN.


A SEPARATE SIGN PERMIT IS REQUIRED SIGNAGE BY OTHERS

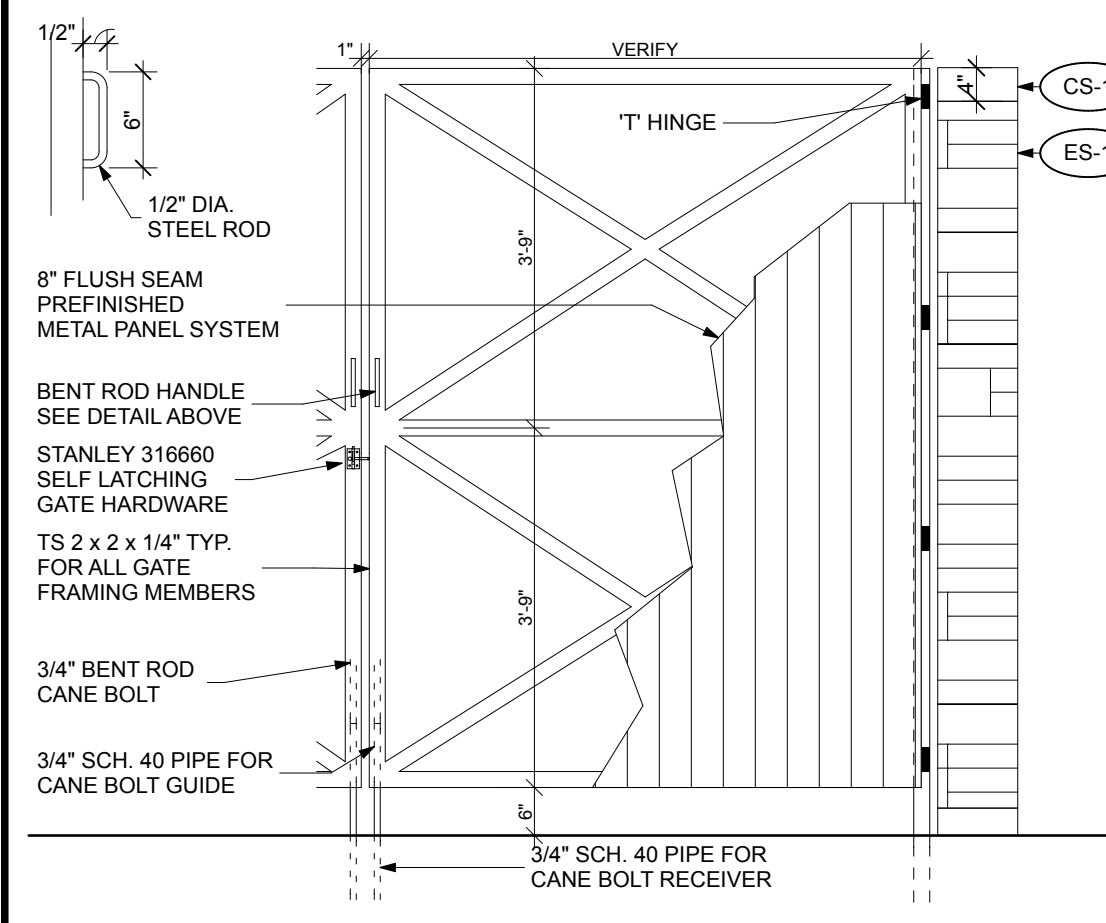


B2 Dumpster Gate
SCALE: 1/2" = 1'-0"

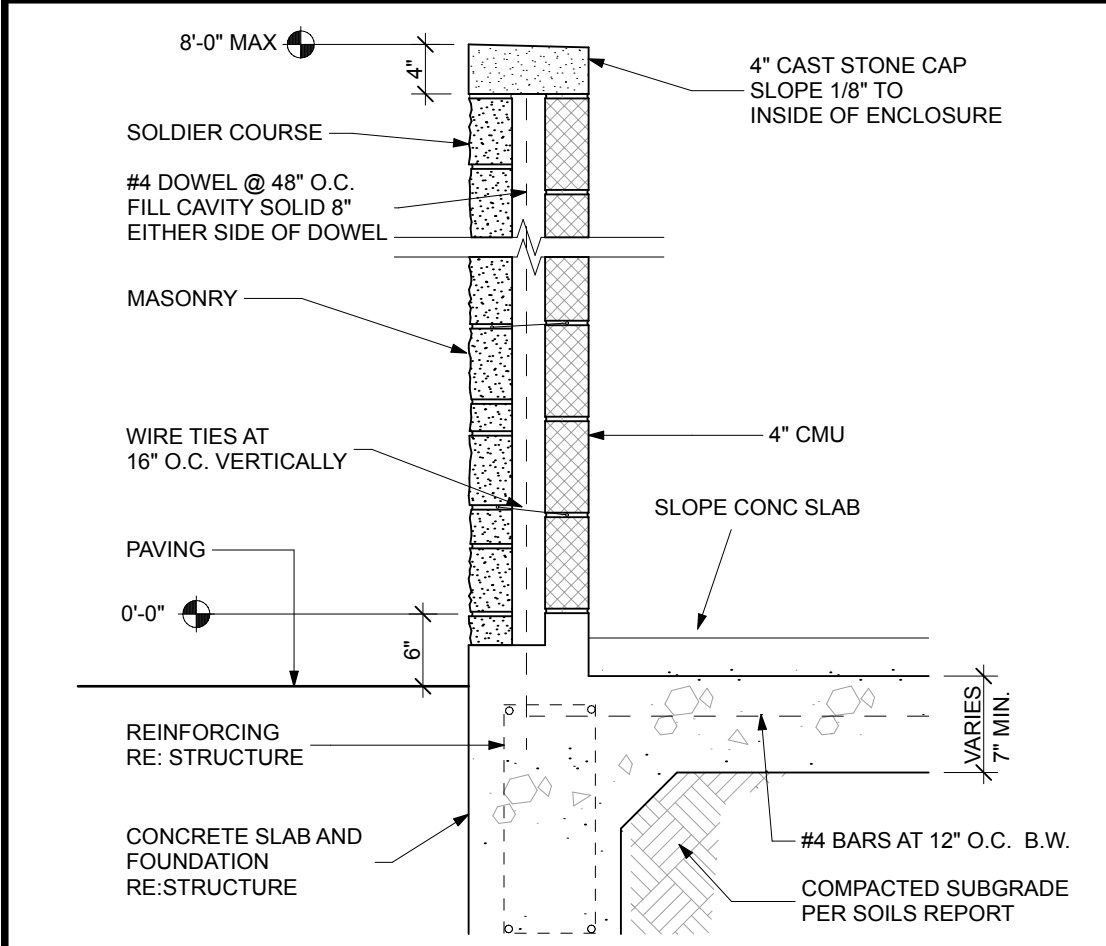

A2 Dumpster Screen
SCALE: 3/4" = 1'-0"

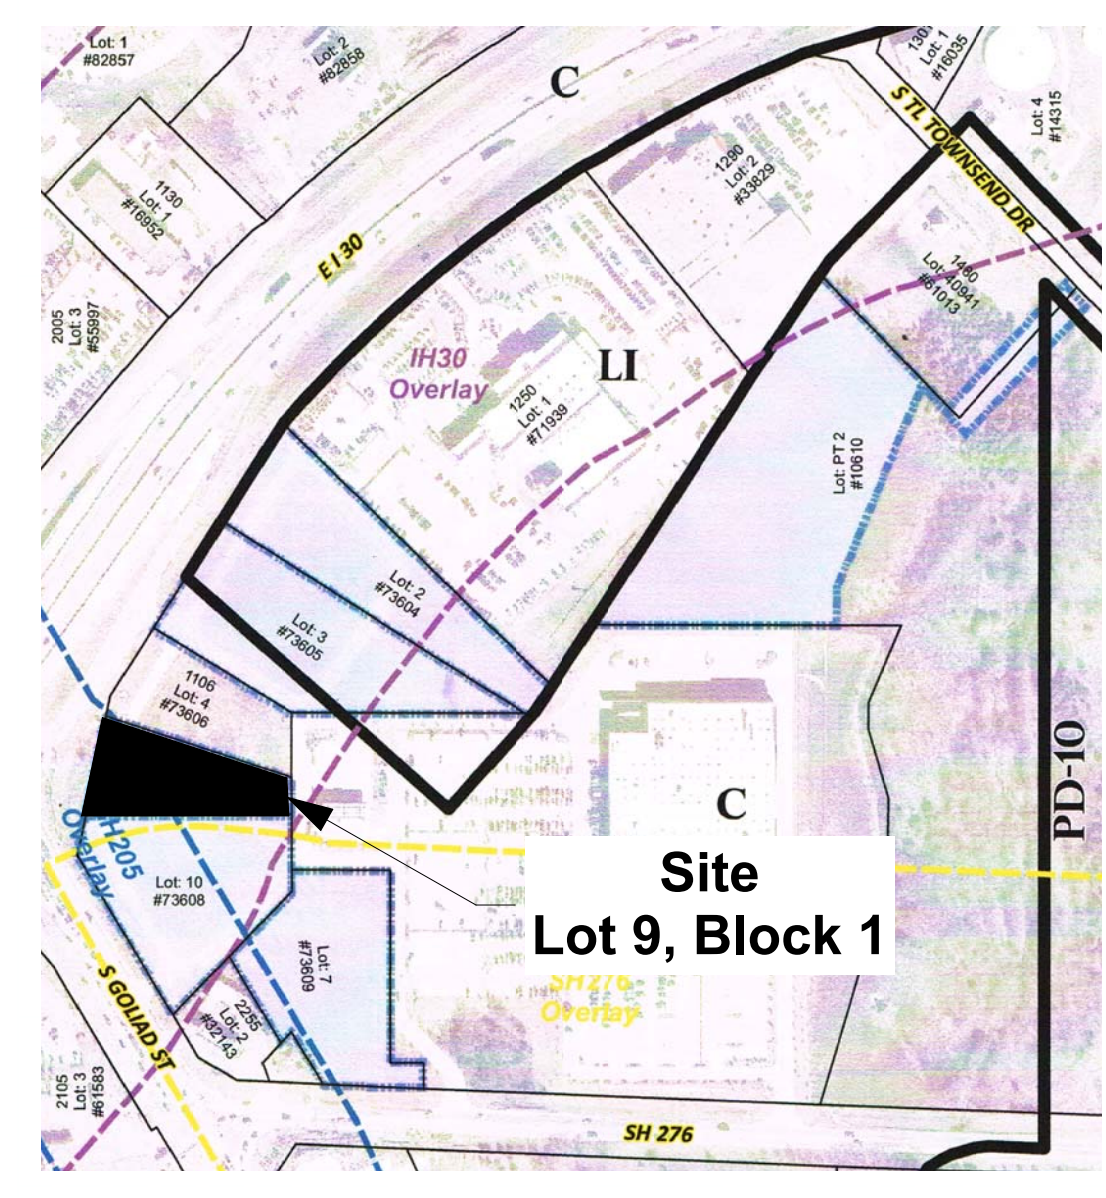

A1 Vicinity Map
SCALE: 1" = 1'-0"

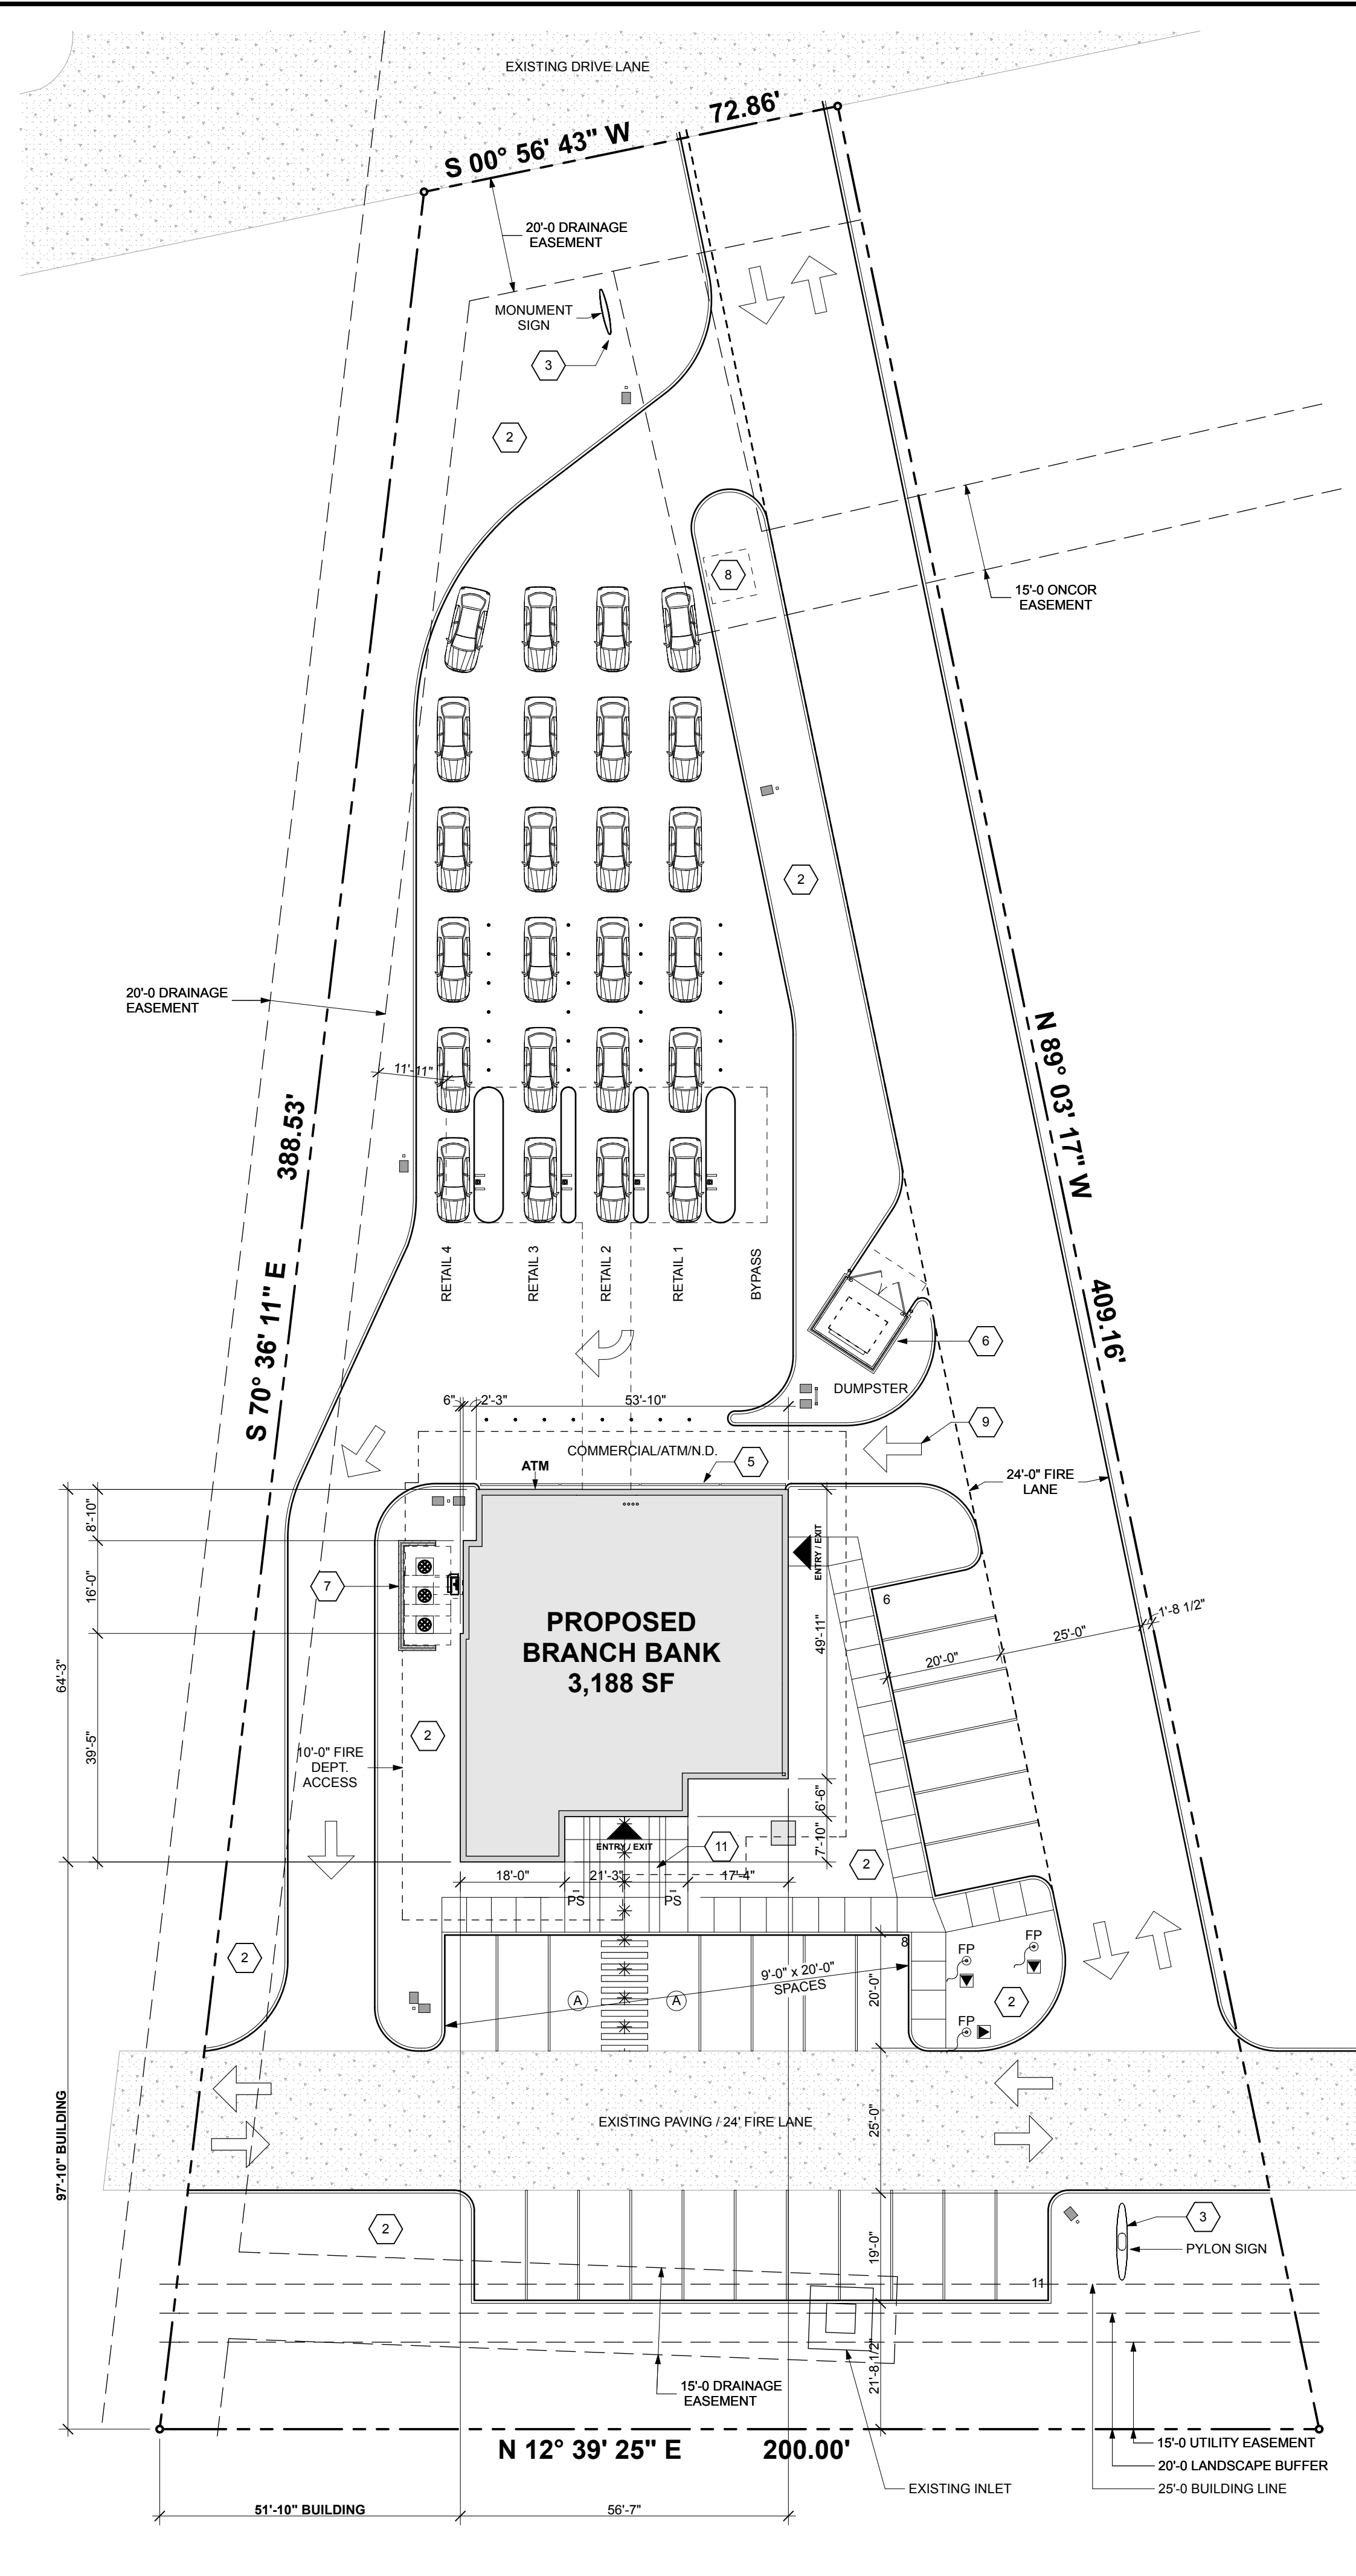

A3 Site Plan
SCALE: 1" = 20'

- D5 Key Notes**
- NOT USED
 - PLANTING AREA - PROVIDE ROUGH GRADING TO 4" BELOW TOP OF ADJACENT CURB/WALK. TYP. LANDSCAPING CONTRACTOR (N.I.C.) TO PROVIDE TOPSOIL TO FINISH GRADES.
 - ELECTRIFIED SIGNAGE (N.I.C.) RE: ELECTRICAL.
 - NOT USED
 - STEEL PIPE RAIL CURB. RE: C2/A-102
 - MASONRY DUMPSTER ENCLOSURE WITH 7" REINFORCED CONCRETE PAVING.
 - MECHANICAL SCREEN.
 - TRANSFORMER PAD.
 - PAINTED DIRECTIONAL ARROW - WHITE.
 - STEEL BOLLARD. RE: D2/A-102
 - ENTRY SIDEWALK POURED AS TOPPING SLAB OVER STRUCTURAL SLAB. PROVIDE CONTROL JOINTS AS SHOWN AND EXPANSION JOINTS AT THE PERIMETER OF THE STRUCTURAL SLAB.

- Key Notes**
- REFER TO CIVIL FOR PAVEMENT CONSTRUCTION, SITE DRAINAGE, AND SITE UTILITIES.
 - REFER TO M.E.P. FOR UTILITY TIE-INS AND SITE ELECTRICAL REQUIREMENTS.
 - REFER TO SOILS REPORT INCLUDED IN PROJECT MANUAL OR AVAILABLE FROM ARCHITECT FOR SOIL PREPARATION.
 - PAVING DIMENSIONS ARE SHOWN TO BACK OF CURB.
 - CURB RADII FROM PUBLIC STREETS = 10' - 0" U.N.O. CURB RADII WITHIN PROPERTY = 3' - 0" U.N.O.
 - SEE SHEETS A-101 AND A-102 FOR SITE ACCESSIBILITY REQUIREMENTS INCLUDING CURB RAMPS.
 - FIELD VERIFY LOCATIONS OF ALL EXISTING UTILITIES & TIE-INS. NOTIFY ARCHITECT OF DISCREPANCIES WITH PLANS PRIOR TO COMMENCING WORK.
 - PROTECT EXISTING IMPROVEMENTS, TREES, AND LANDSCAPING IN CONSTRUCTION AND STAGING AREAS. AT TREES TO REMAIN, DO NOT DISTURB SOIL UNDER THE CANOPY AREA WITHOUT PERMISSION FROM OWNER. PROVIDE CONSTRUCTION FENCE AT EDGE OF CANOPY PRIOR TO COMMENCING WORK. USE CARE TO MINIMIZE ROOT DAMAGE WHEN PAVED AREAS ARE SHOWN UNDER CANOPY.
 - CONSTRUCTION STAGING AND PARKING ONLY IN AREAS SO DESIGNATED OR AGREED UPON AREAS.
 - PROTECT ALL IMPROVEMENTS OUTSIDE THE CONSTRUCTION AREA. THIS INCLUDES TREES, LANDSCAPING, FENCES, ETC. IF DAMAGED RESTORE TO ORIGINAL CONDITION.
 - PROVIDE IRRIGATION SLEEVES UNDER PAVING WHERE SHOWN. LANDSCAPING AND IRRIGATION SYSTEMS N.I.C.
 - SITE SIGNAGE N.I.C. U.N.O. PROVIDE SIGN ELECTRICAL PER ELECTRICAL PLANS. COORDINATE LOCATION WITH OWNER.
 - PROVIDE FINISH GRADING TO 1-1/2" FROM TOP OF CURB/WALK IN ALL AREAS ON PROPERTY NOT BUILT ON OR PAVED AND BETWEEN PROPERTY LINE AND STREET CURB. SLOPE SITE GRADUALLY BETWEEN CURBS AND/OR SIDEWALKS TO DRAIN.
 - ALL INTERIOR DRIVES AND PARKING 5" MINIMUM REINFORCED CONCRETE OVER SUBGRADE PREPARED PER SOILS REPORT RECOMMENDATIONS. U.N.O. RE: CIVIL. ENTRY DRIVES ARE PER CITY REQUIREMENTS, 6" MINIMUM REINFORCED CONCRETE.
 - PAVING JOINTS, INCLUDING EXPANSION, CONTROL, AND CONSTRUCTION JOINTS SHALL EXTEND THROUGH THE ATTACHED CURB, OR ISLAND, ETC., PROVIDING THE SAME MOVEMENT AS THE PAVING. ALL JOINTS SHALL HAVE THE SAME EXPANSION MATERIAL AND SEALANT AS THE PAVING JOINT.
 - ALL LIGHT POLES SHALL BE 3'-0" MINIMUM DISTANCE FROM NEAREST PAVING, U.N.O.
 - A.D.A./T.A.S. COMPLIANT ACCESSIBLE ROUTE WITHIN SITE BOUNDARY CONNECTING PUBLIC TRANSPORTATION STOP, ACCESSIBLE PARKING SPACES, PASSENGER LOADING ZONES, PUBLIC STREET/SIDEWALKS TO ACCESSIBLE BUILDING ENTRANCES. PROVIDE MINIMUM PATH WIDTH OF 36 INCHES, 1:20 MAXIMUM SLOPE (EXCEPT AT CURB RAMPS), 1:50 MAXIMUM CROSS SLOPE, CHANGE IN LEVEL, 1:12" MAXIMUM, (OVER 1/4" PROVIDE BEVEL WITH 1:2 MAX. SLOPE), SURFACE: LIGHT BROOM FINISH CONCRETE, U.N.O.

SITE LEGEND

APPLICABLE WHERE SHOWN ON SITE PLAN

ACCESSIBILITY COMPLIANCE

- *** ACCESSIBLE PATH
- (A) CURB RAMPS
- (A) REFER TO PLANS ON A-102 FOR TYPICAL RAMP REQUIREMENTS
- PS ACCESSIBLE PARKING SIGN RE: D4/A-102
- (A) INDICATES ACCESSIBLE PARKING SPACE
- 2 - 4" PVC IRRIGATION SLEEVE, CAP ENDS AND FLAG LOCATIONS. PLACE 12" BELOW PAVEMENT. EXTEND 1'-0" BEYOND EDGE OF CONCRETE.
- PROPERTY LINE
- CONCRETE CURB SEE A-103/CIVIL
- CURBED ISLAND. SEE A-102
- SIDEWALK OUTSIDE PROPERTY LINE. CONSTRUCT IN COMPLIANCE WITH APPLICABLE CITY REQUIREMENTS. SIDEWALK WITHIN PROPERTY LINE W/TOOLED JOINTS @ 5'-0" O.C. U.N.O. SEE A-103/AND CIVIL.
- WHITE PORCELAIN TRAFFIC BUTTONS CENTERED ON ISLAND @ 3'-0" O.C. OFFSET FROM CENTER 4" IF EXPANSION JOINT IS CENTERED ON ISLAND.
- GROUND MTD. LIGHT FIXTURE SEE ELECT. PROVIDE 12"x12"x4" CONC. PAD & STUB UP. VERIFY FINAL LOCATION.
- AC CONDENSING UNIT LOCATION. PROVIDE 4" REINFORCED PAD, 2" LARGER THAN THE UNIT. VERIFY CLEARANCE AND LOCATION WITH ARCHITECT.
- FLAG POLE: 30'-0" HIGH, CONCEALED HALYARD TYPE. SEE PROJECT MANUAL. SEE A-102 FOR CONC. BASE.
- EXISTING TREE TO REMAIN IF WITHIN CONSTRUCTION AREA PROTECT PER GENERAL NOTES
- NEW TREE LOCATION RE: LANDSCAPE PLAN WHERE APPLICABLE
- LIGHTING POLE & LIGHT SEE A-102 FOR BASE. SEE ELECT. FOR POLE SIZE AND LIGHT CONFIGURATION

A5 General Notes



ARCHITECTURE
PLANNING
INTERIOR DESIGN

14800 ST. MARY'S LANE
SUITE 120
HOUSTON TEXAS 77079
FAX 713-552-9810
713-552-0707
WWW.MGARCHITECTS.COM

CONSULTANTS

STRUCTURAL ENGINEER:
SCA Consulting Engineers

M/E/P/ ENGINEER:
T & D Engineers



Rockwall Branch
East Interstate 30
Rockwall, Texas 75087


ISSUE:

MARK	DATE	DESCRIPTION
	12/14/12	ROCKWALL SITE PLAN APP.

PROJECT NO:
12-643.A

SITE PLAN

A-101

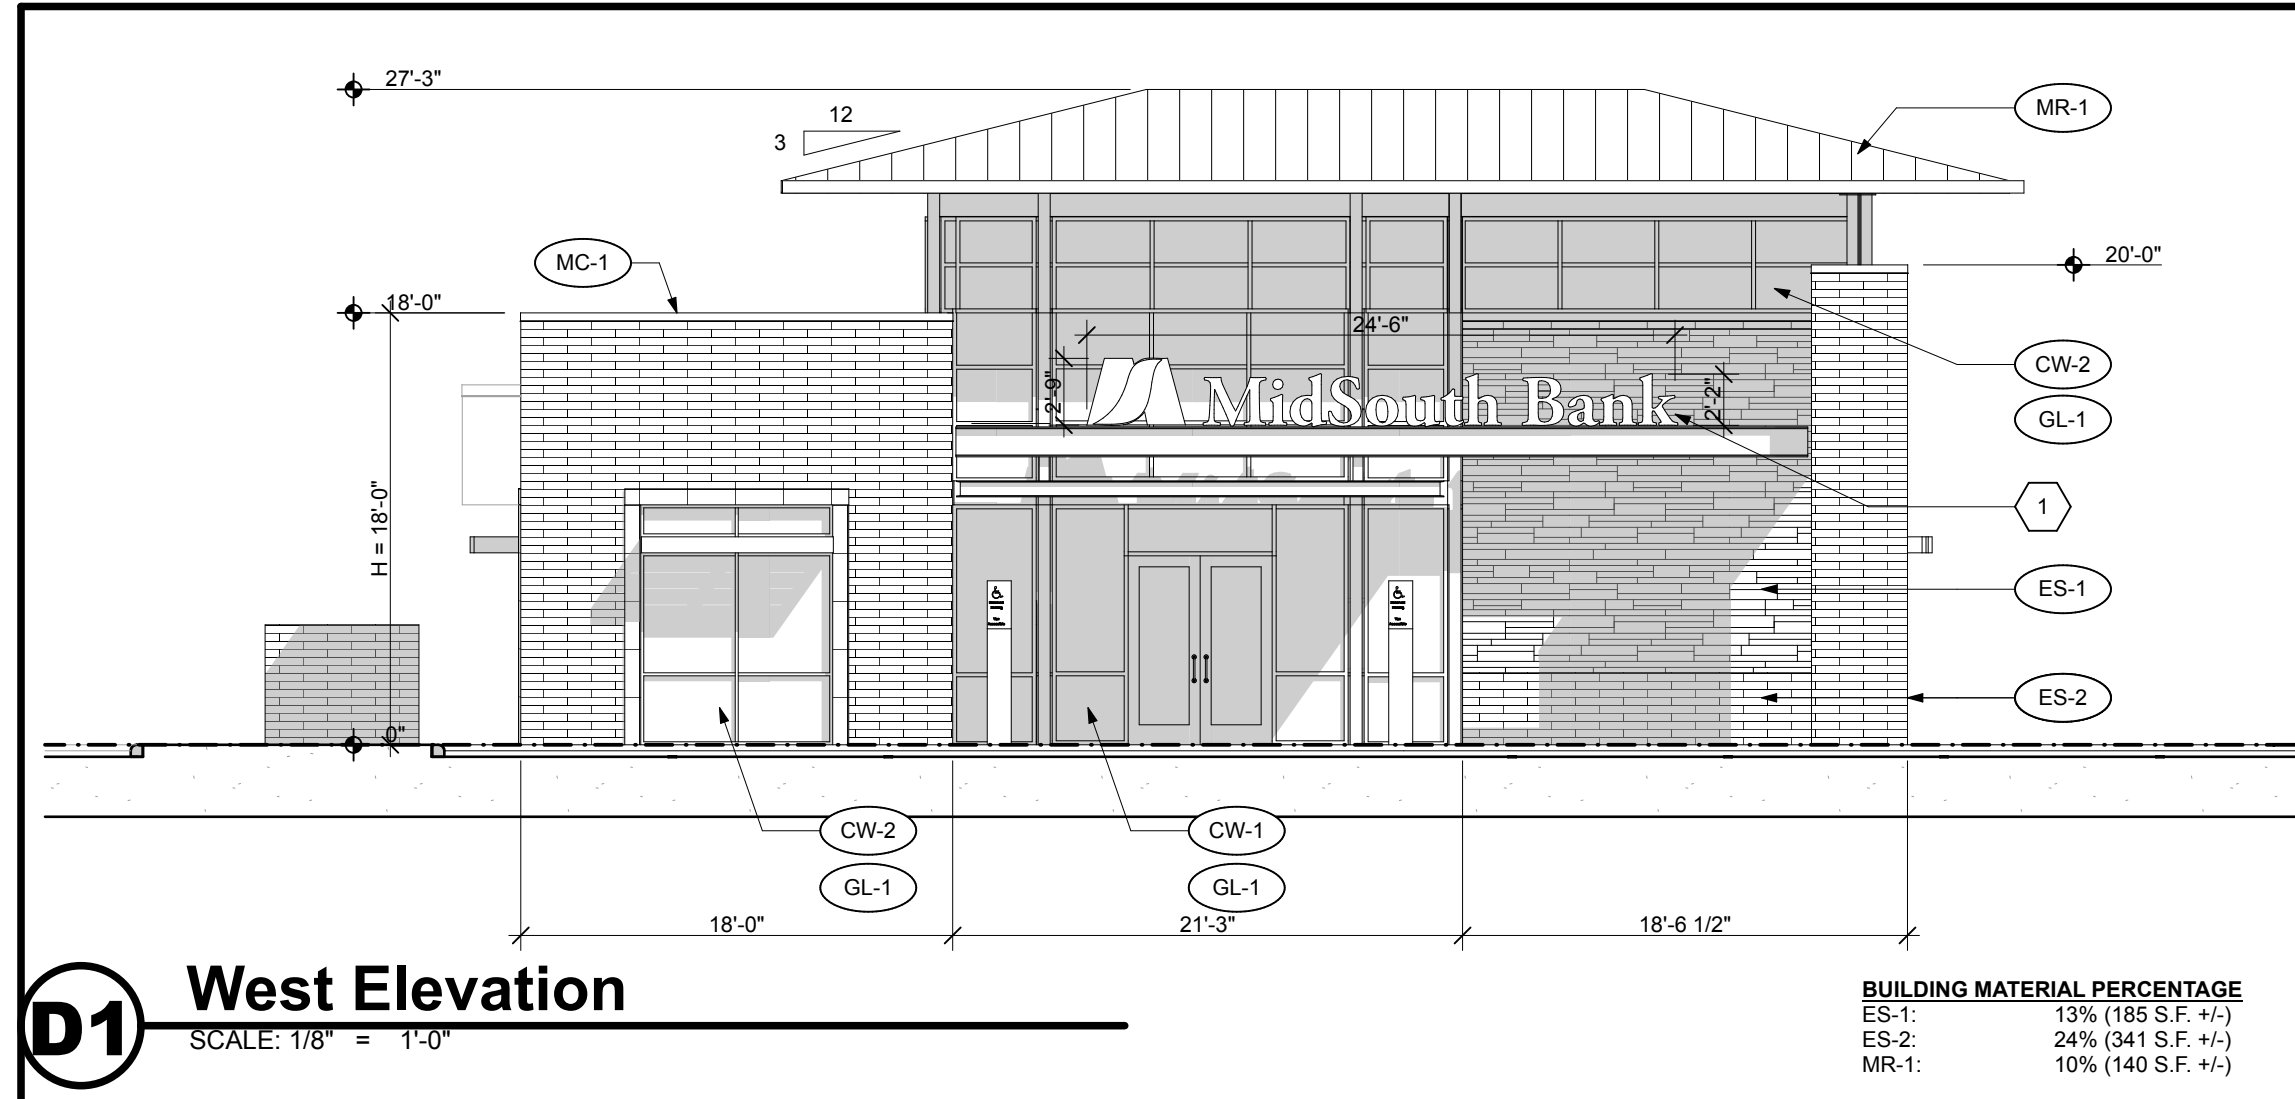


D1 West Elevation
SCALE: 1/8" = 1'-0"

BUILDING MATERIAL PERCENTAGE

ES-1:	13% (185 S.F. +/-)
ES-2:	24% (341 S.F. +/-)
MR-1:	10% (140 S.F. +/-)



- D5** Key Notes
- BUILDING SIGNAGE BY OTHERS. PROVIDE JUNCTION BOX FOR ELECTRICAL SIGN. COORDINATE WITH SIGN COMPANY. A SEPARATE SIGN PERMIT IS REQUIRED FOR ALL SIGNS
 - PLASTER CONTROL JOINT, TYP.
 - RECESSED LANE LIGHTS, CENTER ABOVE LANE.
 - BOLLARDS, PAINT EP-2
 - BANK EQUIPMENT, VERIFY OPENING REQUIREMENTS.

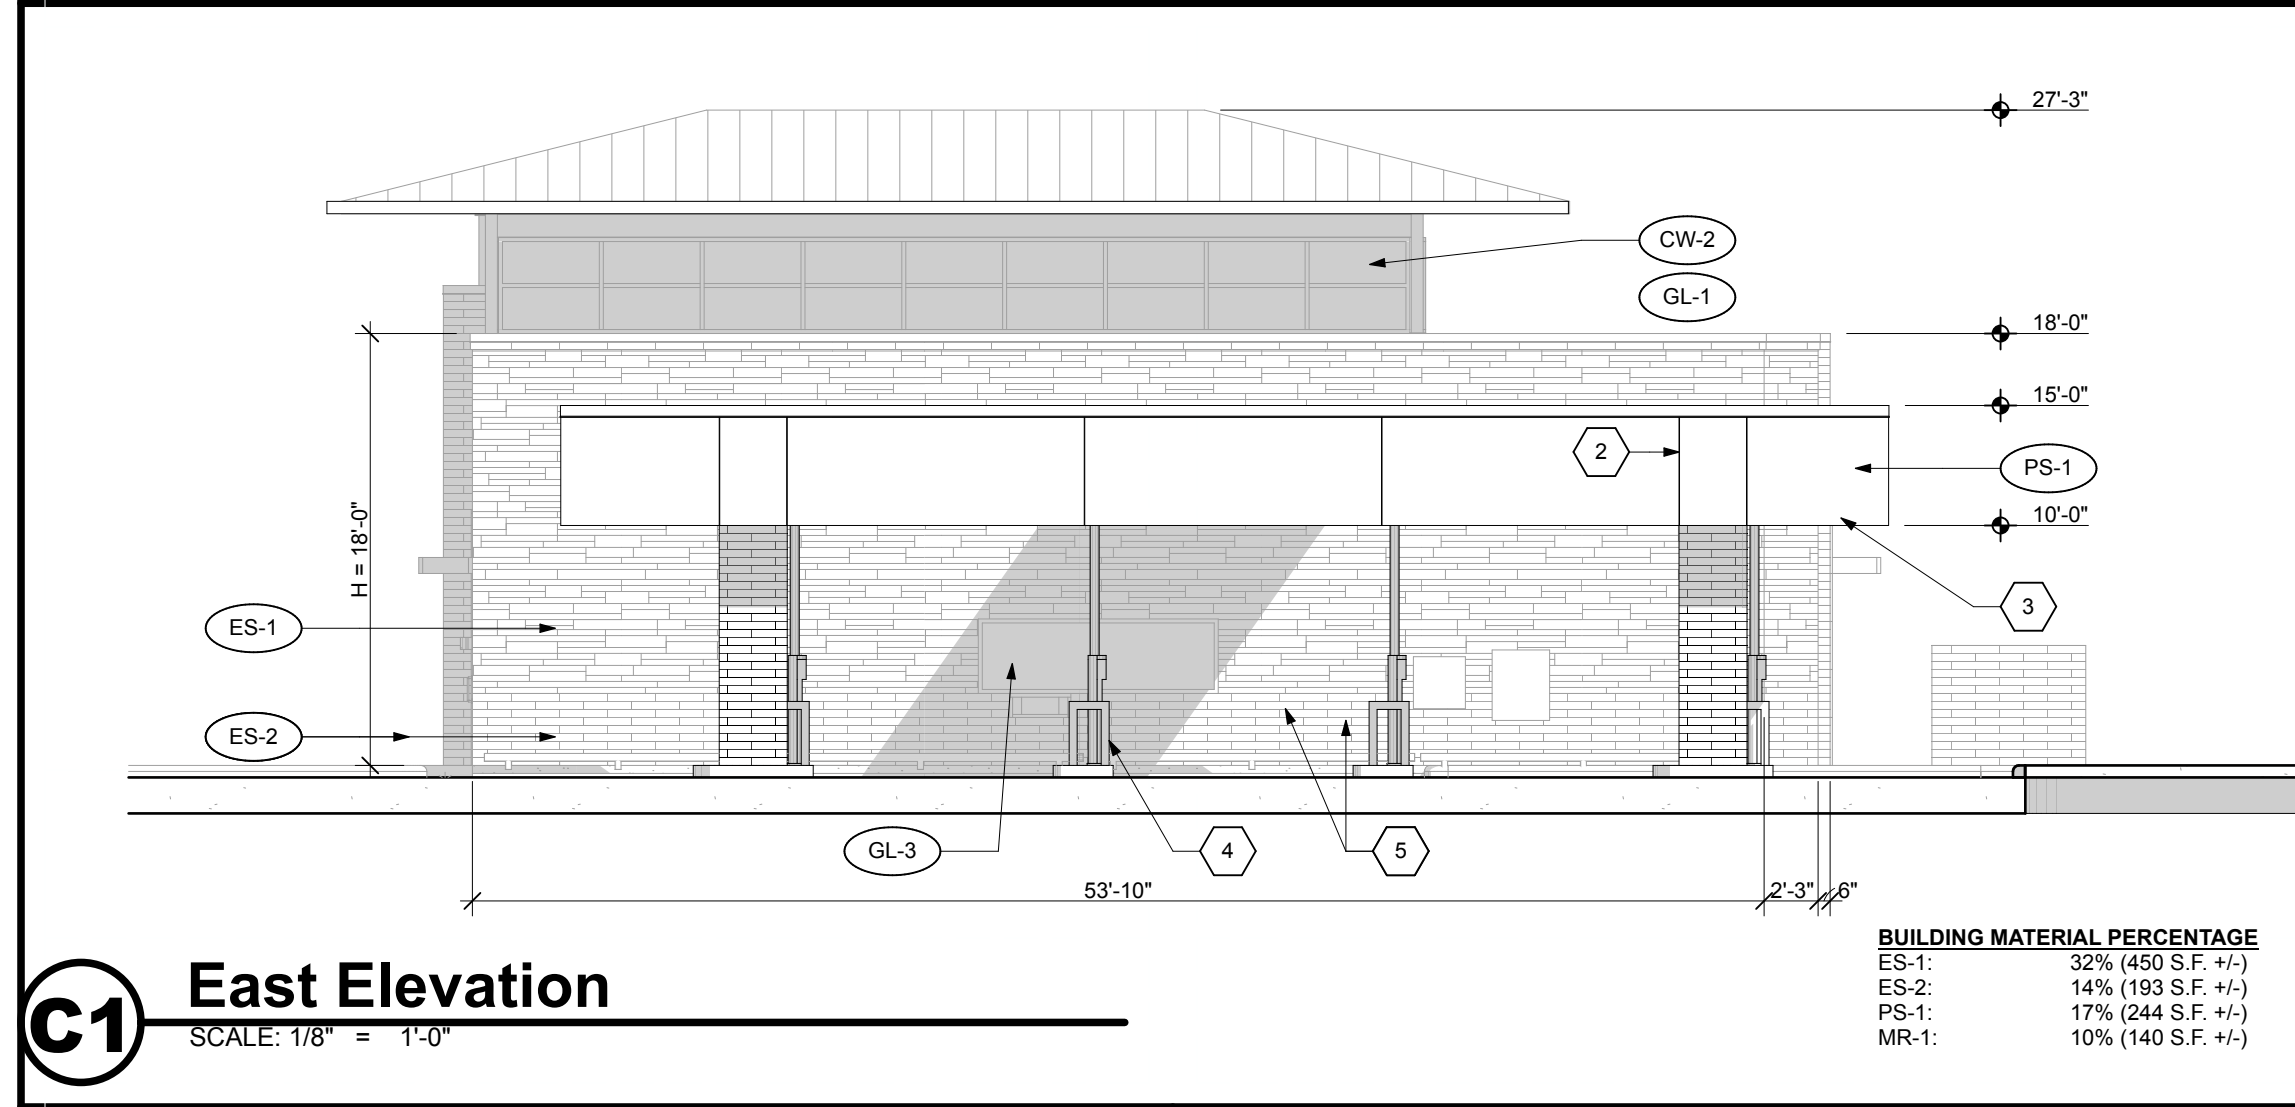

C1 East Elevation
SCALE: 1/8" = 1'-0"

BUILDING MATERIAL PERCENTAGE

ES-1:	32% (450 S.F. +/-)
ES-2:	14% (193 S.F. +/-)
PS-1:	17% (244 S.F. +/-)
MR-1:	10% (140 S.F. +/-)

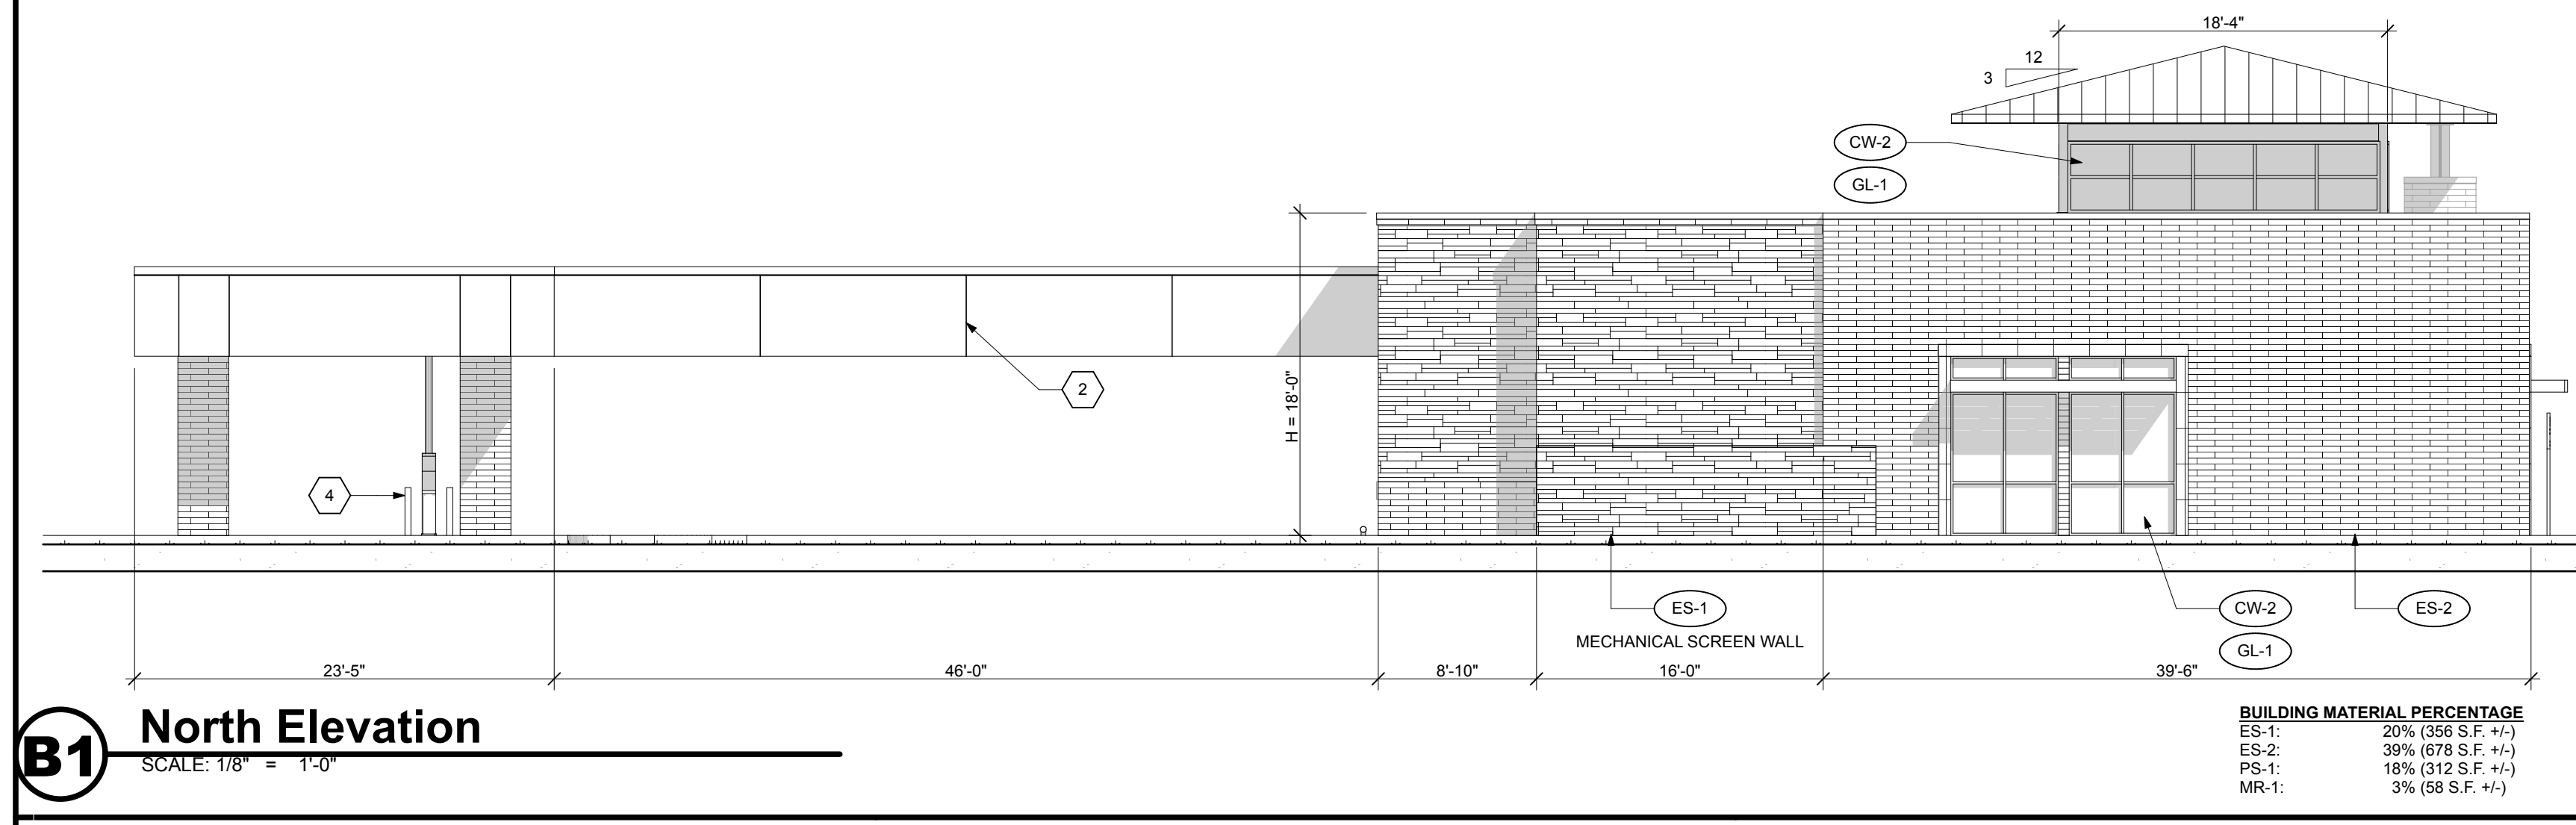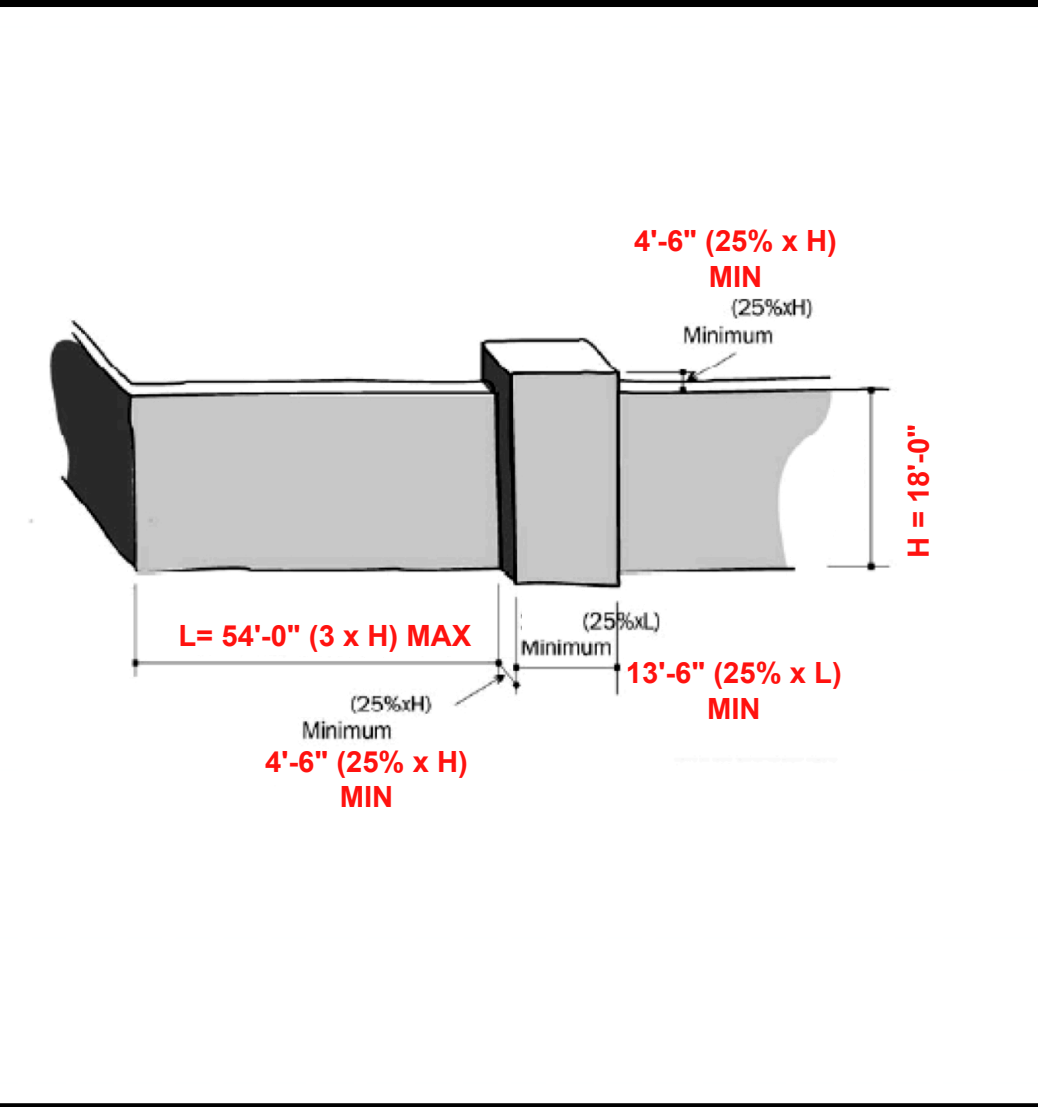

B1 North Elevation
SCALE: 1/8" = 1'-0"


BUILDING MATERIAL PERCENTAGE

ES-1:	20% (356 S.F. +/-)
ES-2:	39% (678 S.F. +/-)
PS-1:	19% (312 S.F. +/-)
MR-1:	3% (58 S.F. +/-)

B4 Exterior Materials Schedule
SCALE: 1:0.83

Code	Material	Manufacturer	Description	Color	Remarks
CC-1	COLORLED CONCRETE	LM SCOFFIELD	INTEGRALLY COLORED CONCRETE WITH SEALER	DARK GRAY #C-34	PROVIDE 3" X 3" SAMPLE IN FIELD. ACCESSIBLE RAMPS RE: A-101 AND A-102
CS-1	CAST STONE	SITWORKS		NATURAL	
CW-1	CURTAIN WALL	YKK	YCW 750 OG (7' 10" TOTAL DEPTH)	CLEAR ANODIZED	
CW-2	CURTAIN WALL	YKK	YCW 750 OG (5' 14" TOTAL DEPTH)	CLEAR ANODIZED	
EP-1	EXTERIOR PAINT	SHERWIN WILLIAMS	SEE COATING SCHEDULE		MATCH PS-1
EP-2	EXTERIOR PAINT	SHERWIN WILLIAMS	SEE COATING SCHEDULE	MATCH ICI #453 MONTEREY CLIFFS	BOLLARDS, PIPE RAIL
EHP-1	EXTERIOR HIGH PERFORMANCE PAINT	SHERWIN WILLIAMS	SEE HIGH PERFORMANCE SYSTEMS SCHEDULE	TO MATCH CW-1	CANOPY GALVANIZED STEEL, PREFINISHED METAL
ES-1	STONE	ALAMO STONE	FULL BED LEDGESTONE	STONEWALL BLEND	NOTE 2
ES-2	STONE	UPCHURCH KIMBROUGH	REMNANT STONE - CONCORD SERIES FULL BED 4" x 24"	IVORY	
GL-1	GLASS	PPG	1" INSULATED TINTED LOW E SOLARBAN 70 XL SHGC= .33 / U= .26	ATLANTICA	TYPICAL GLASS
GL-2	GLASS	PPG			NOTE 1 ENTRY DOOR / SIDELIGHTS RE: SHEET A-663
GL-3	GLASS		BULLET RESISTANT		CLEAR
M-1	MORTAR	SGS SOLOMON GRIND	SEE PROJECT MANUAL		TOOLED JOINT
MC-1	METAL CAP				MATCH PS-1
MR-1	METAL ROOFING	BERRIDGE	16" CEILING STANDING SEAM ROOFING SYSTEM	HARTFORD GREEN	KYNAR 500
PS-1	PLASTER / STUCCO		3/4" PLASTER WITH ACRYLIC COATING	MATCH ICI #653 EUROPEAN WHITE	
RP-1	RAMP PAVER	PAVESTONE	4" X 8" X 2 3/8" ADA DETECTABLE WARNING PAVER	ADA RIVER RED	
SG-1	SOFFIT GRID	USG	DOWN 2XA	PLAT WHITE	INSTALL WITH HOLD DOWN CLIPS
SP-1	SOFFIT PANEL	USG	2 X 2 GYPSUM LAY-IN PANEL WITH VINYL FACE #3260	WHITE	MOTOR BANK SOFFITS IN SG1

NOTE 1: TEMPERED OR LAMINATED WHERE REQUIRED BY CODE. GLASS IN DOORS TO BE 1/4" CLEAR U.N.O.
NOTE 2: Limestone to be cut with random lengths up to 30" long. 2" high x 12" long min. 3" high x 18" long min. 5" high x 30" long min. 6" high x 30" long min.
NOTE 3: PROVIDE 2 MATERIAL SAMPLE MOCK UP PANELS OF BRICK OR STONE, CAST STONE, AND EPS FOR FINAL APPROVAL BY OWNER AND ARCHITECT BEFORE ORDERING MATERIALS. EACH MOCK UP SHALL DEMONSTRATE DIFFERING SHADES OF MATERIALS.
GENERAL NOTE: PROVIDE SAMPLE OF MATERIAL FOR VERIFICATION OF COLOR UNLESS NOTED OR AGREED TO OTHERWISE.

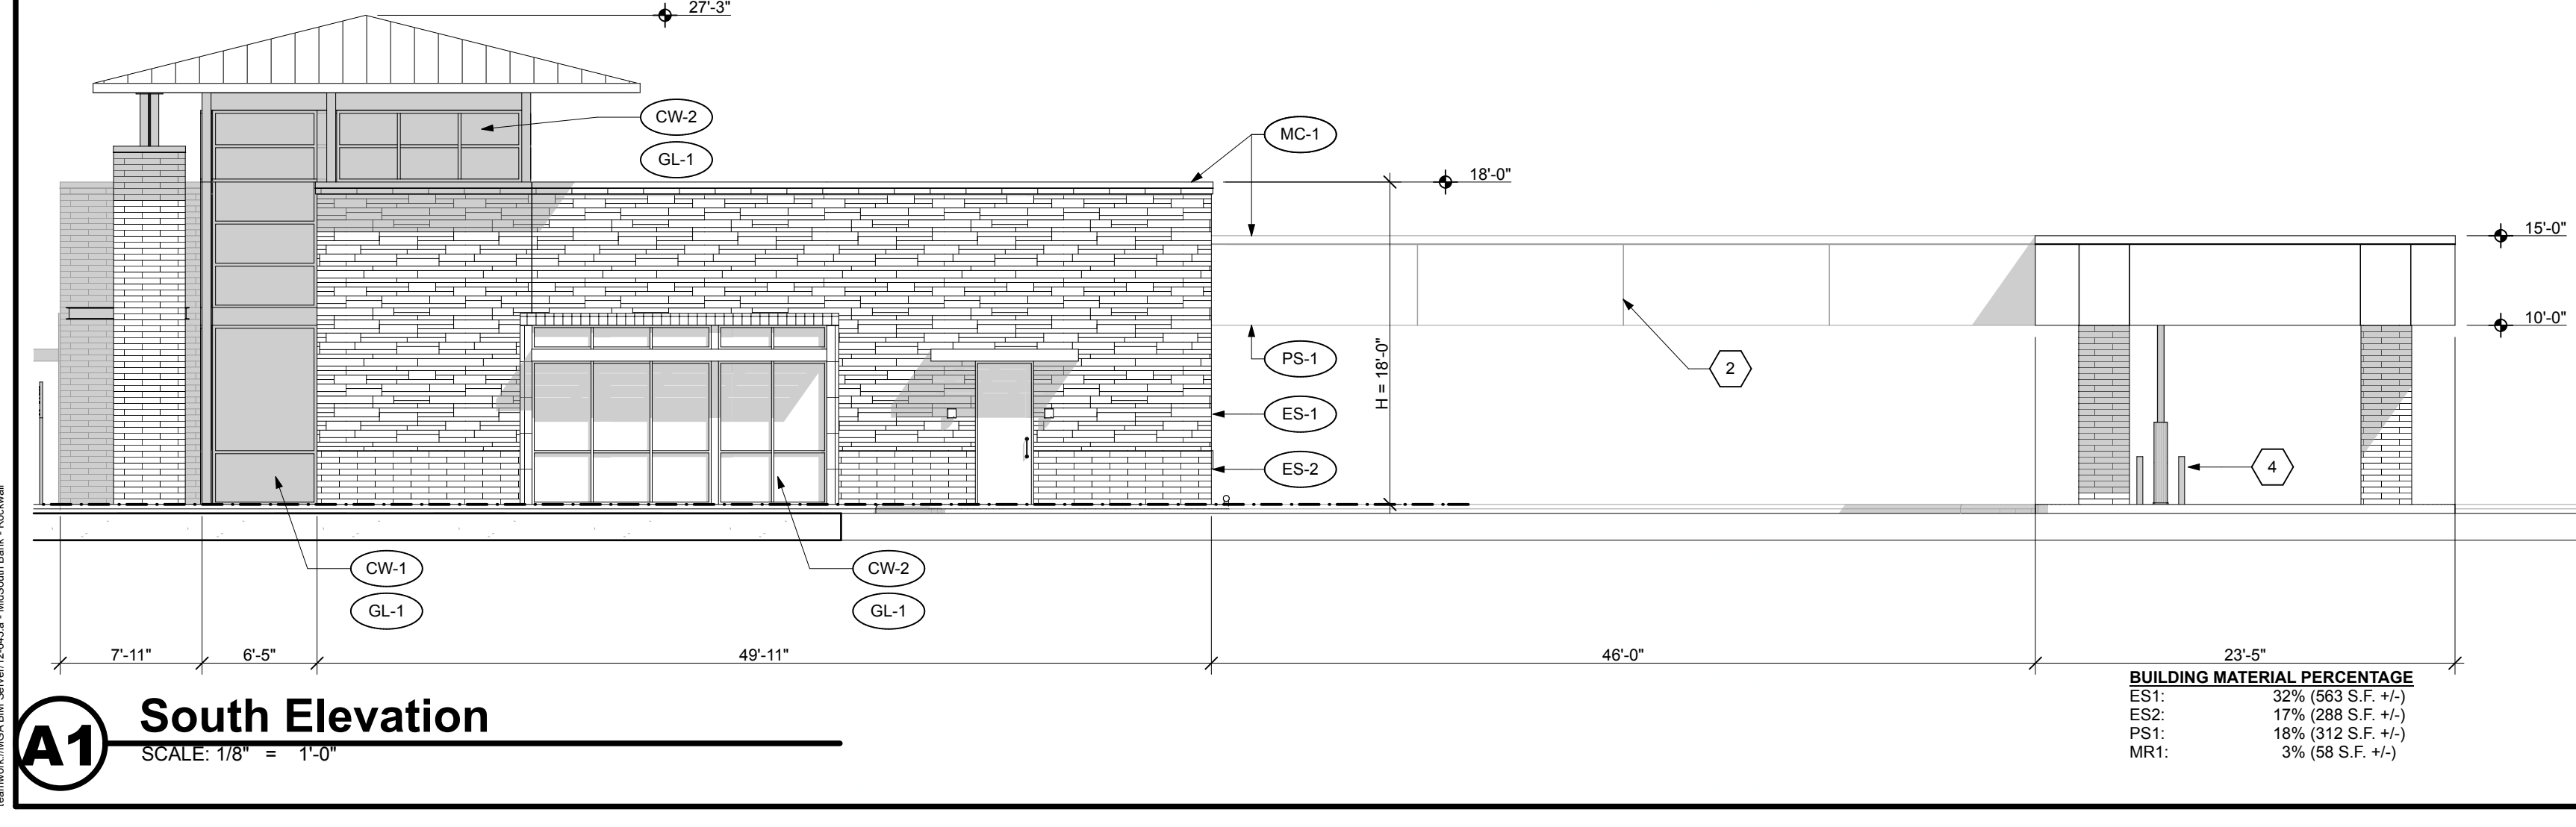

A1 South Elevation
SCALE: 1/8" = 1'-0"

BUILDING MATERIAL PERCENTAGE

ES1:	32% (663 S.F. +/-)
ES2:	17% (288 S.F. +/-)
PS1:	18% (312 S.F. +/-)
MR1:	3% (58 S.F. +/-)

- A5** General Notes
- COORDINATE WITH BANK EQUIPMENT SUPPLIER (B.E.S.)
 - FOR COLORS AND FINISHES REFER TO EXTERIOR MATERIALS SCHEDULE
 - PROVIDE SAFETY GLASS IN ENTRY DOOR AND SIDE LIGHTS, AND/OR LOCATIONS REQUIRED BY CODE.
 - PAINT WALL MOUNTED EXTERIOR ELECTRICAL DEVICES TO MATCH ADJACENT MATERIALS.
 - AT SIGNAGE LOCATIONS PROVIDE 1/2" EXTERIOR GRADE PLYWOOD IN LIEU OF SHEATHING.
 - VERIFY BRICK CONTROL JOINT LOCATIONS WITH ARCHITECT.
 - ALL REVEALS, EXPANSION JOINTS, & MISCELLANEOUS EDGES ARE TO BE PAINTED TO MATCH ADJACENT MATERIAL COLOR, U.N.O.
 - ALL GLASS TO BE G-1, U.N.O.
 - ALL BRICK TO BE FB-1, U.N.O.
 - ALL PLASTER TO BE PS-1, U.N.O.

ARCHITECTURE
PLANNING
INTERIOR DESIGN

14800 ST. MARY'S LANE
SUITE 120
HOUSTON TEXAS 77079
FAX 713-552-9810
713-552-0707
WWW.MGARCHITECTS.COM

CONSULTANTS

STRUCTURAL ENGINEER:
SCA Consulting Engineers

M/E/P ENGINEER:
T & D Engineers

Rockwall Branch
East Interstate 30
Rockwall, Texas 75087



ISSUE:

MARK	DATE	DESCRIPTION
	12/14/12	ROCKWALL SITE PLAN APP.

PROJECT NO:
12-643.A

EXTERIOR ELEVATIONS

A-201

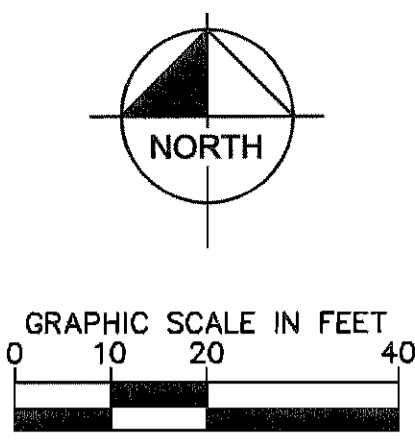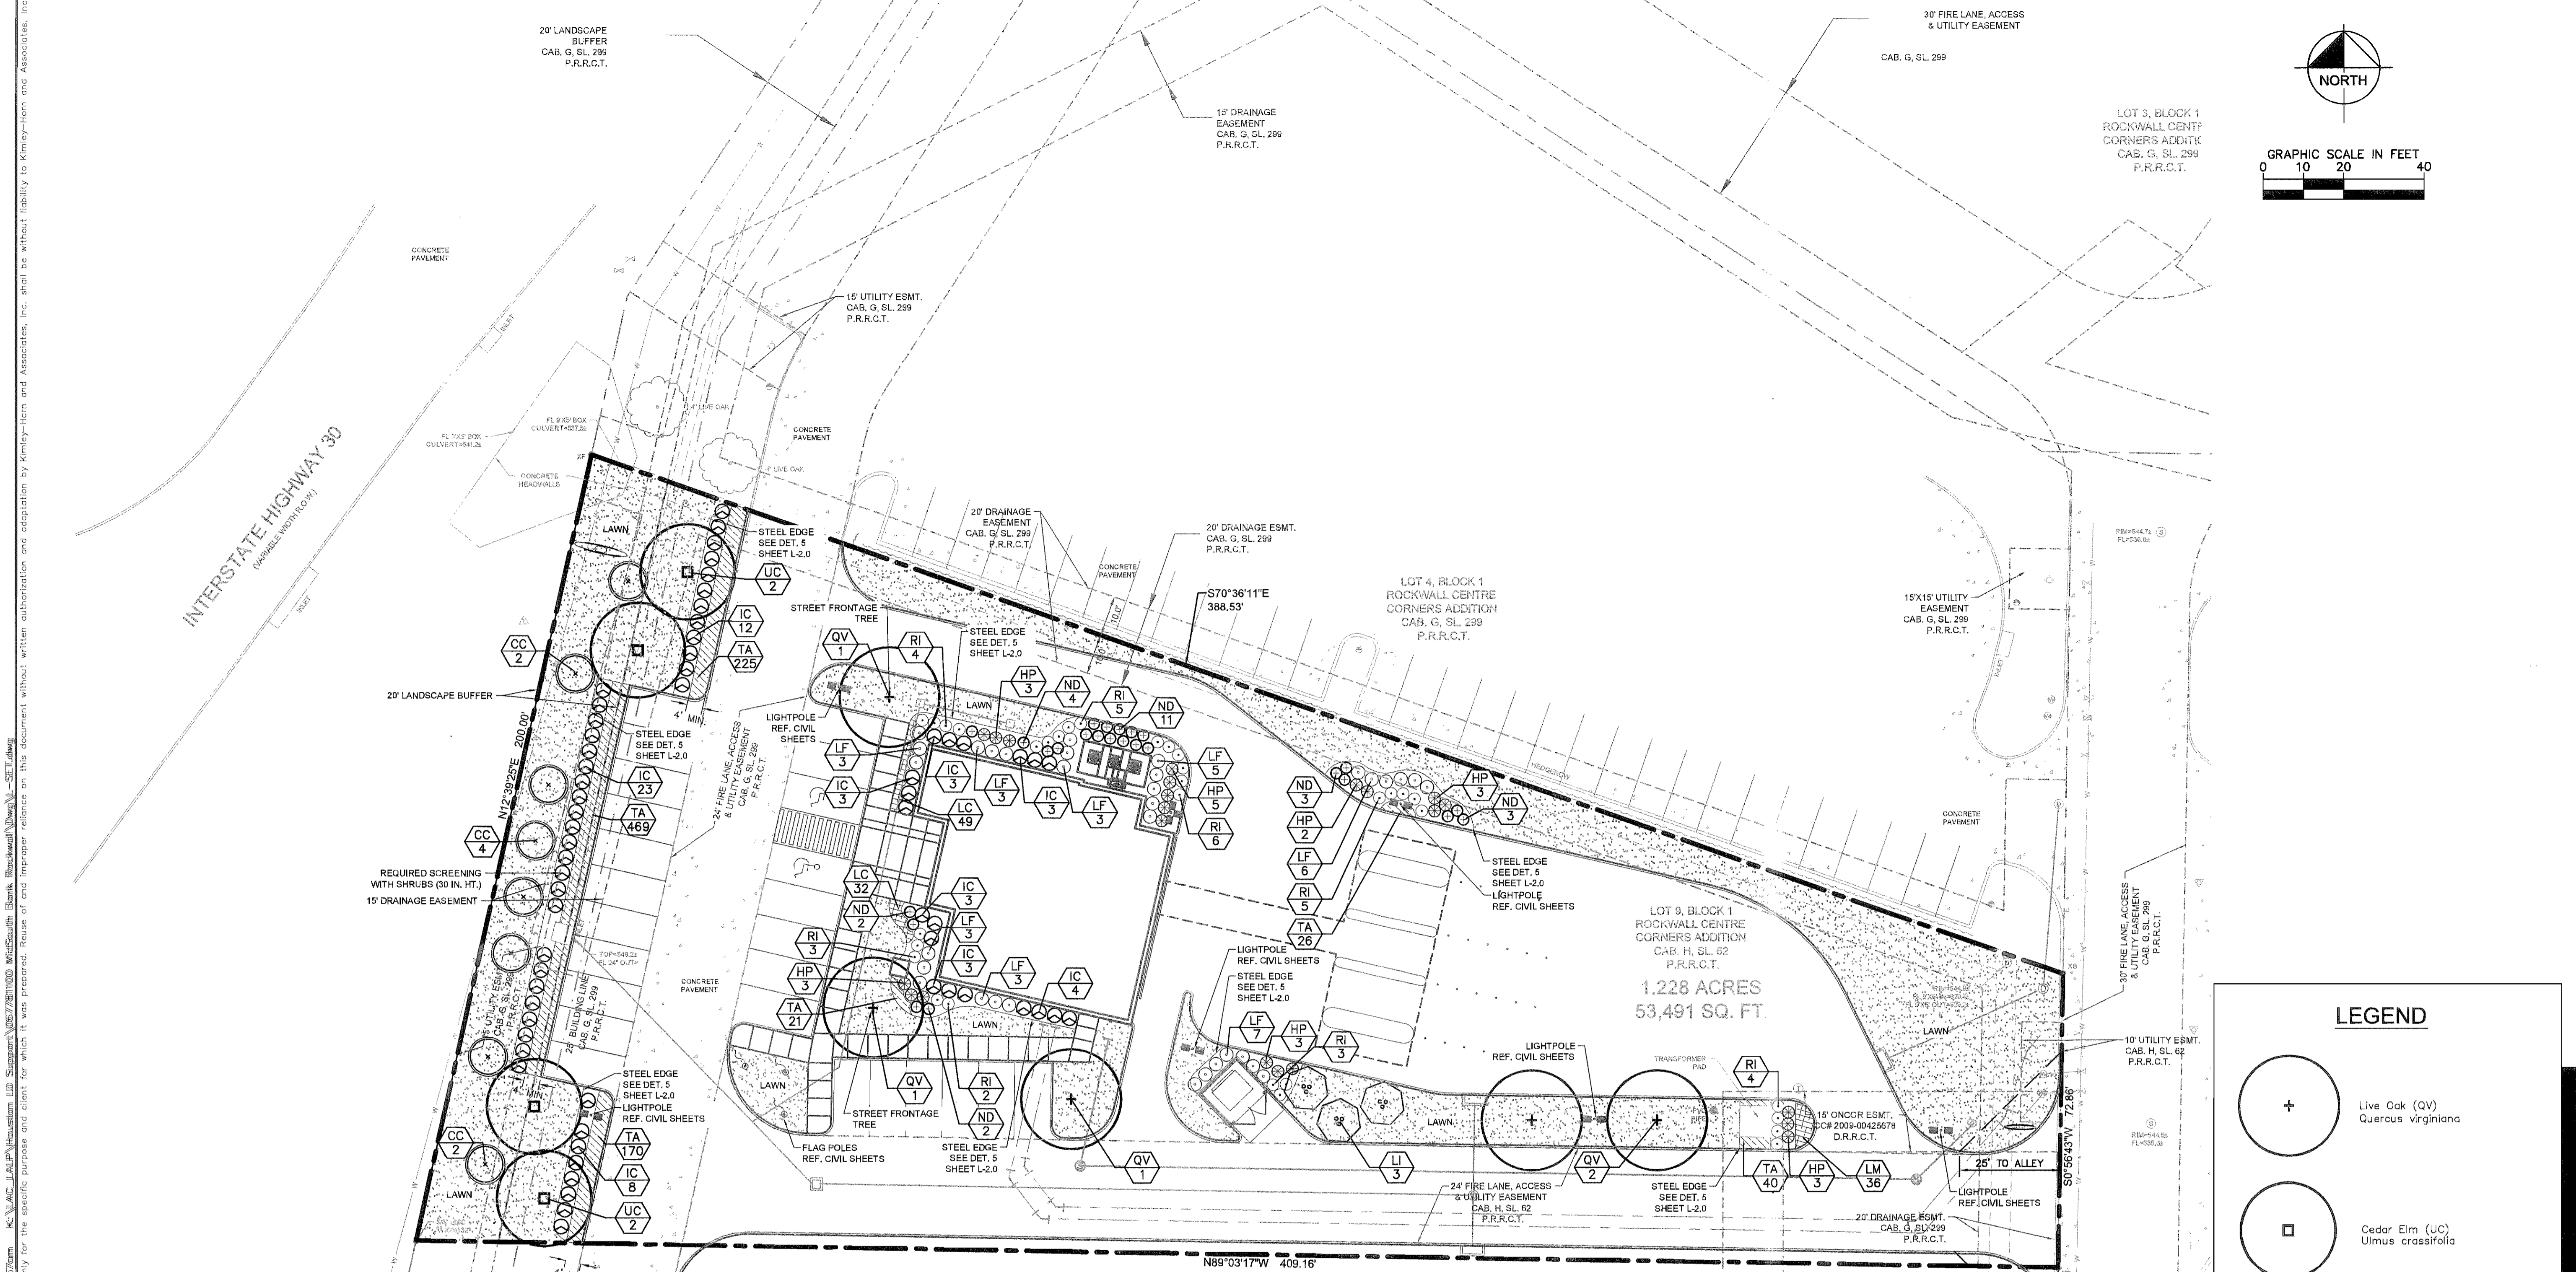

LANDSCAPE CRITERIA - CITY OF ROCKWALL DEVELOPMENT GUIDELINES

	REQUIRED	PROVIDED
LANDSCAPE AREA		
15% OF THE LOT AREA SHALL BE UTILIZED FOR LANDSCAPING.	15% = 8,024 SF	16,225 SF
NO LESS THAN 50% LOCATED IN FRONTAGE	50% = 4,012 SF	7,254 SF
TOTAL LOT AREA = 54,491 SF		
STREET FRONTAGE - I-30 OVERLAY & SH 205 OVERLAY		
MIN. BUFFER STRIP TO BE 20' WIDE	YES	YES
ENTIRE LENGTH OF FRONTAGE LINED WITH SHRUBS	YES	YES
3 CANOPY TREES / 100 LF OF FRONTAGE	6 CANOPY TREES	6 CANOPY TREES*
4 ACCENT TREES / 100 LF OF FRONTAGE	8 ACCENT TREES	8 ACCENT TREES
I-30 FRONTAGE = 200 LF		
PARKING LOTS		
IF PARKING AND MANEUVERING SPACE EXCEEDING 20,000 SF ONE SHADE TREE FOR EVERY TEN SPACES.	3	3
NO PARKING SPACE LOCATED MORE THAN 80 LF FROM TREE TRUNK OR LARGE CANOPY TREE	YES	YES
INTERNAL PARKING LANDSCAPE = 2,986 SF PARKING = 30,605 SF SPACES = 25		
NOTES: *UTILITY EASEMENT PREVENTS THE PLACEMENT OF TWO LARGE CANOPY TREES. ADDITIONAL CANOPY TREES HAVE BEEN PLACED ON THE EAST SIDE OF THE FIRE LANE ADJACENT TO I-30.		

LEGEND

- Live Oak (QV)
Quercus virginiana
- Cedar Elm (UC)
Ulmus crassifolia
- Crape Myrtle (LI)
Lagerstromia indica
- Red Bud (CC)
Cercis canadensis
- Dwarf Burford Holly (IC)
Ilex cornuta 'Dwarf Burford'
- Texas Sage (LF)
Leuophyllum frutescens
- Harbor Dwarf Nandina (ND)
Nandina domestica 'Harbour Dwarf'
- Indian Hawthorn (RI)
Rhipiopsis indica
- Red Yucca (HP)
Hesperaloe parviflora
- Asian Jasmine (TA)
Trachelospermum asiaticum
- Lantana (LC)
Lantana camara

OWNER:
MIDSOUTH BANK
1214 ST. CHARLES STREET
HOUMA, LA 70360
TEL: (958) 876-3073
CONTACT: CRAIG GUIDRY

SITE STREET ADDRESS:
MIDSOUTH BANK
ROCKWALL BRANCH
EAST INTERSTATE 30
ROCKWALL, TX 75087

PREPARED BY:
 Kimley-Horn
and Associate

12012 WICKCHESTER LANE
SUITE 500
HOUSTON, TX 77079
PH. (281)597-9300
CONTACT: MALLORY MARTIN

LANDSCAPE PLAN

**ROCKWALL BRANCH
PREPARED FOR
MIDSOUTH BANK**

CITY OF ROCKWALL, TEXAS


SHEET NUMBER
L-10

Kimley-Horn and Associates, Inc.
© 2010 KIMLEY-HORN AND ASSOCIATES, INC.
12012 WICKCHESTER LANE, SUITE 500, HOUSTON, TX 77079
PHONE: 281-597-9300 FAX: 281-597-8052
WWW.KIMLEY-HORN.COM
TBP# FIRM REGISTRATION F-928

REVISIONS

No.	DATE	BY

KHA PROJECT: 06/7/81100
DATE: JANUARY 2013
SCALE: AS SHOWN
DESIGNED BY: KJM
DRAWN BY: KJM
CHECKED BY: JAF

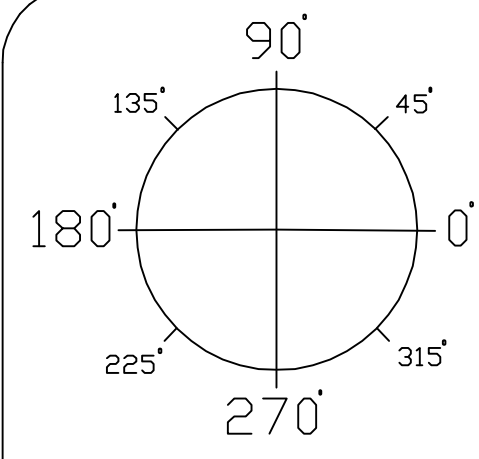

GENERAL NOTES:


- POLE HEIGHT 22'-0"
- SEE LIGHT POLE BASE FOR CONCRETE BASE DETAILS
- MAXIMUM FIXTURE HEIGHT: 22'-6" (INCLUDES 6" BASE)
- POLE LIGHTS AND CANOPY LIGHTS ARE LED FIXTURES
- TYPICAL POLE: SSP-22.5-5.0-7-BZ-DM-X-BC (6" SQUARE BRONZE POLE 22'-0" TALL)

Symbol	Qty	Label	Arrangement	Lum. Lumens	LLF	Description
[Symbol]	15	Q-1	SINGLE	3751	0.890	McGraw Edison LRC-B16-1-LED-E1-WST
[Symbol]	1	SLB-5	BACK-BACK	16850	0.890	McGraw Edison GLEDN-AA-04-LED-E1-SWQ
[Symbol]	3	SL4	SINGLE	15871	0.890	McGraw Edison GLEDN-AA-04-LED-E1-SL4
[Symbol]	1	SL4-2	TWIN-Rotated Optics	15871	0.890	McGraw Edison GLEDN-AA-04-LED-E1-SL4
[Symbol]	1	SL3	SINGLE	15609	0.890	McGraw Edison GLEDN-AA-04-LED-E1-SL3
[Symbol]	1	SL4-2A	2 @ 90 DEGREES	15871	0.890	McGraw Edison GLEDN-AA-04-LED-E1-SL4


Calculation Summary	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
AIM = 3ft AFF	Illuminance	Fc	8.93	25.1	2.5	3.57	10.04
Property Line - Ground Lv	Illuminance	Fc	0.66	3.8	0.0	N.A.	N.A.
Site - Ground Lvl	Illuminance	Fc	2.43	25.3	0.0	N.A.	N.A.

LumNo	Label	Z
1	SL4	22.5
2	SL3	22.5
3	SL4	22.5
5	SL4-2A	22.5
6	SLB-5	22.5
7	Q-1	10.25
8	Q-1	10.25
9	Q-1	10.25
10	Q-1	10.25
11	Q-1	10.25
12	Q-1	10.25
13	Q-1	10.25
14	Q-1	10.25
15	Q-1	10.25
16	Q-1	10.25
17	Q-1	10.25
18	Q-1	10.25
19	Q-1	10.25
20	Q-1	10.25
21	SL4-2	22.5
22	SL4	22.5
23	Q-1	10.25

Putterman, Scharck & Assoc. / Bruce Hanks / 12-07-12

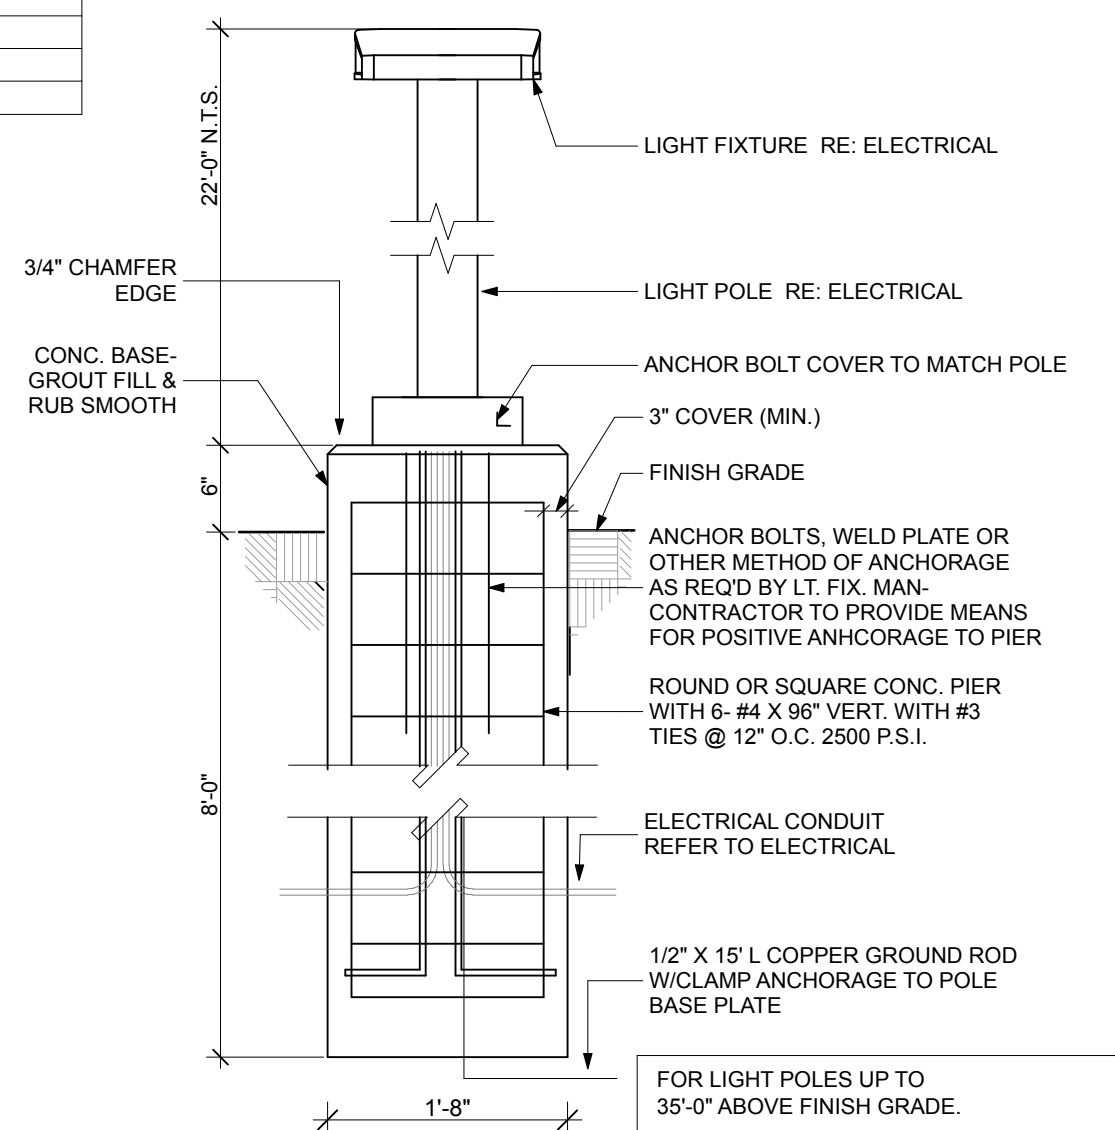

Light Pole SCALE: 3/4" = 1'-0"

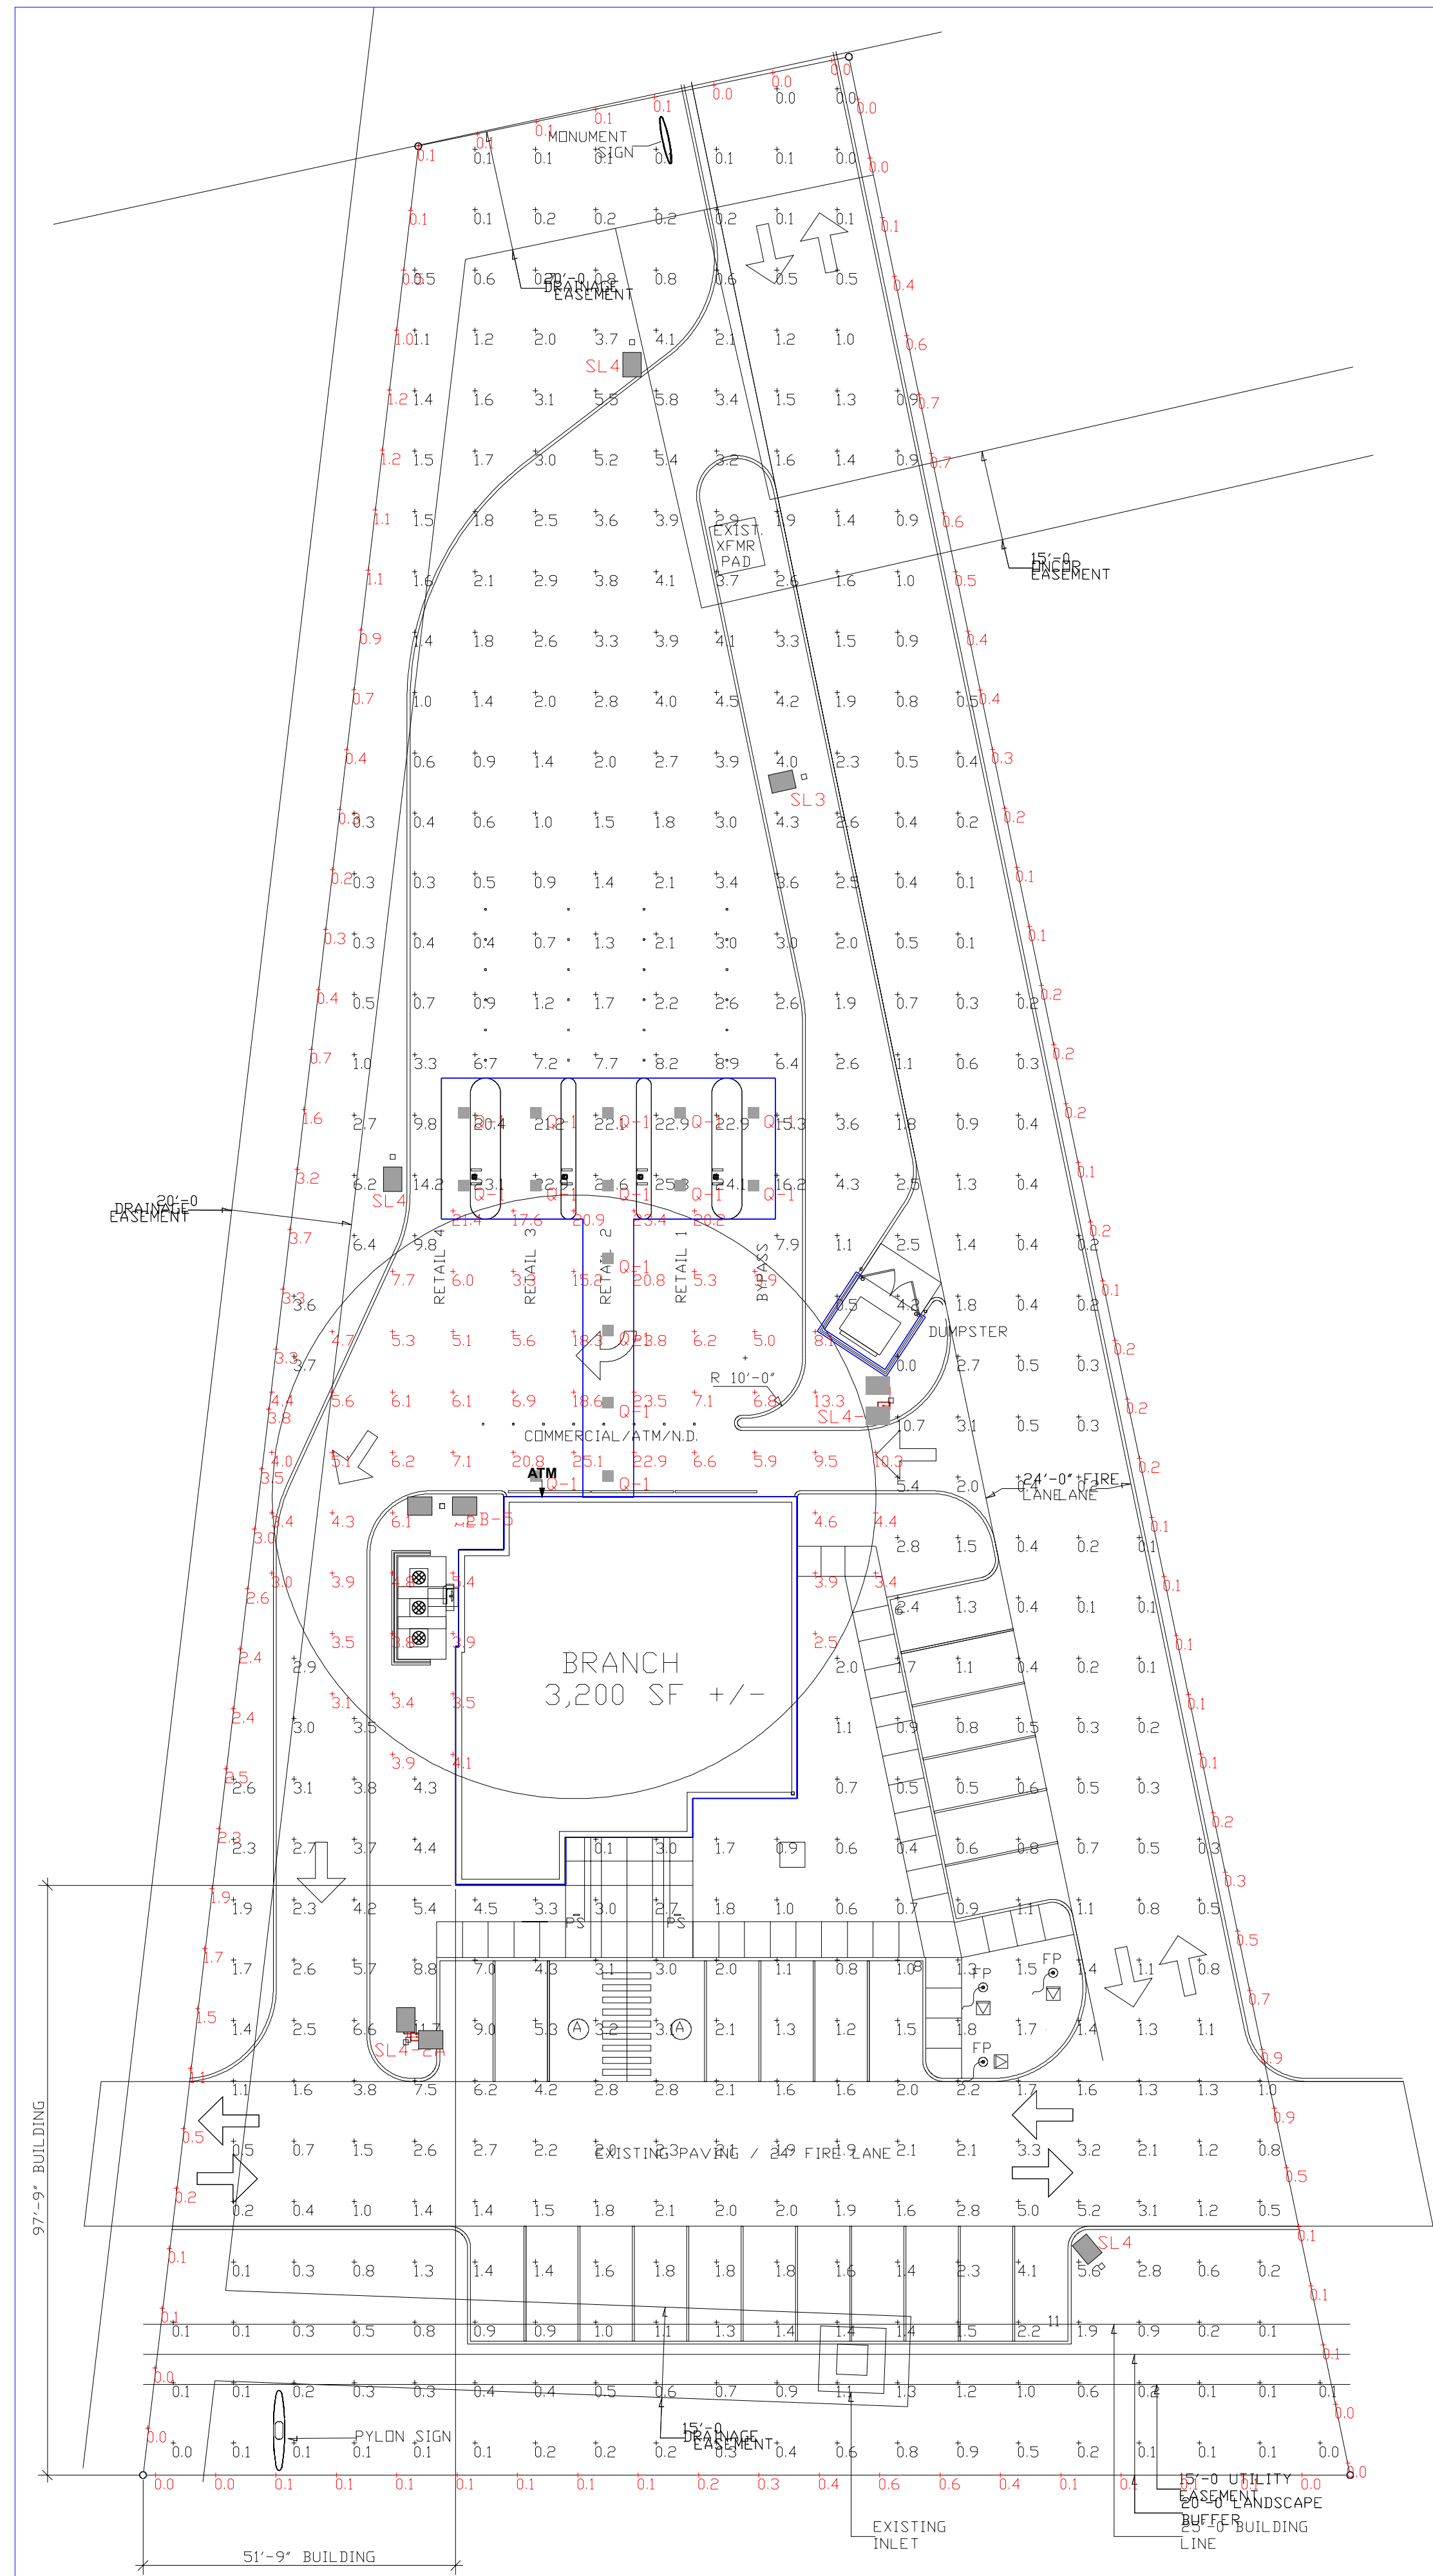

Luminaire data is obtained according to IES procedures under laboratory conditions. Field results may differ from computer model due to many factors, including: ambient temperature, line voltage variations, lamp performance, installation, reflectances, and other site specific conditions.

McGRAW-EDISON®

SL-X

DESCRIPTION: The Galeon™ LED luminaire delivers exceptional performance in a highly visible, low-profile design. Patented, high-efficiency AccuLED Optics™ system provides uniform and energy conscious illumination to walkways, parking lots, roadways, building areas and security lighting applications. IP66 rated and UL94 Listed for wet locations.

SPECIFICATION FEATURES

Construction: Extruded aluminum driver enclosure thermally isolated from Light Square for optimal thermal performance. Heavy wall, die-cast aluminum and cap enclose housing and die-cast aluminum heat sinks. A unique patent pending interlocking housing and heat sink provides sealability with superior structural rigidity. 3G vibration tested. Optional tool-less hardware available for ease of entry into electrical chamber. Housing is IP66 rated.


Electrical: LED drivers are mounted to removable tray assembly for ease of maintenance. 120-277V 50/60Hz, 3A/7.5W or 48V 60Hz operation. Shipped standard with Cooper Lighting proprietary circuit module designed to withstand 10kV of transient line surge. The Galeon LED luminaire is suitable for operation in -40°C to 40°C ambient environments. For applications with ambient temperatures exceeding 40°C, specify the HA (High Ambient) option. Light Squares are IP66 rated. 90% lumen maintenance expected at 60,000 hours.

Optics: Choice of 12 patented, high-efficiency AccuLED Optics™ manufactured from injection molded acrylic. Optics are precisely designed to shape the distribution maximizing efficiency and application spacing. AccuLED Optics create consistent distributions with the scalability to meet customized application requirements. Offered standard in 4000K (+/- 275K) CCT and nominal

or 120° apart, specify the EA extended arm option. For wall mounting, specify wall mount bracket option. 3G vibration tested.

Finish: Housing finished in Super durable TOC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Heat sink is powder coated black. Standard colors include black, bronze, grey, white, dark platinum and graphite metallic. RAL and custom color matches available. Consult the McGraw Edison Architectural Colors brochure for the complete selection.

Warranty: Five-year warranty.

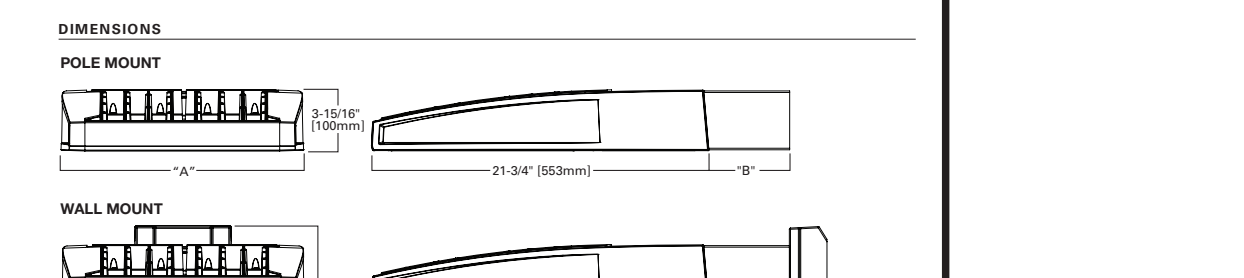

CERTIFICATION DATA

UL Listed
LM79 LMB Compliant
ANSI Compliant
RO 8001
Photometric™ Consortium Qualified™ (P9) Item

ENERGY DATA

Baseline LED Drive
-5.8 Power Factor
-25% Total Harmonic Distortion
120-277V/50/60
3A/7.5 & 48V 60Hz
40°C Max. Temperature
90% Max. Lumen Maintenance
40°C Max. Temperature
90% Max. Temperature (HA Option)
200 Watt

ADH12541 2012-10-23 11:53:32

COOPER Lighting www.cooperlighting.com

McGRAW-EDISON®

Q-1

DESCRIPTION: The LRC LED Recessed Canopy Luminaire is specifically designed for recessed applications in single or double skin canopies. Three specialized optics are optimized for efficiency and uniformity, delivering high light levels on task. Typical applications include retail gas stations, convenience stores, banks and pharmacy drive thru canopies. UL94 Listed for wet locations.

SPECIFICATION FEATURES


Construction: Heavy-duty cast aluminum housing with aluminum mounting frame. Wet location driver enclosure is elevated to prevent water ingress. 12" knockout provided for wiring connections. IP66 Rated.

Optics: Dedicated optical cavities for the array of 16 individual LEDs to maximize the efficiency and control of the distribution out of each module. To enhance visual comfort, a glare reducing optical system is utilized to maximize delivered lumens while maintaining glare. Scalable in 1, 2 or 4 Light Squares LED modules to canopy luminaire is suitable for operation in -40°C to 40°C ambient operations. Two asymmetric optics and one

asymmetric optic are specifically designed for efficiency and uniformity. Offered standard in 4000K (+/- 275K) CCT and nominal 80 CRI.

Electrical: LED driver is enclosed in a wet location box, designed to manage thermal for longevity. 120-277V operation. 3A/7.5W or 48V 60Hz operation. Optional proprietary circuit module designed to withstand 10kV of transient line surge. 90% lumen maintenance expected at 60,000 hours. The LRC LED Recessed Canopy Luminaire is suitable for operation in -40°C to 40°C ambient operations.

Finish: Housing and lens frame are finished in Super TOC polyester powder coat paint, 2.5 mil nominal thickness for superior protection against fade and wear. Standard housing and lens frame trim colors include white, grey, black, bronze, dark platinum, and graphite metallic. RAL and color matches available.

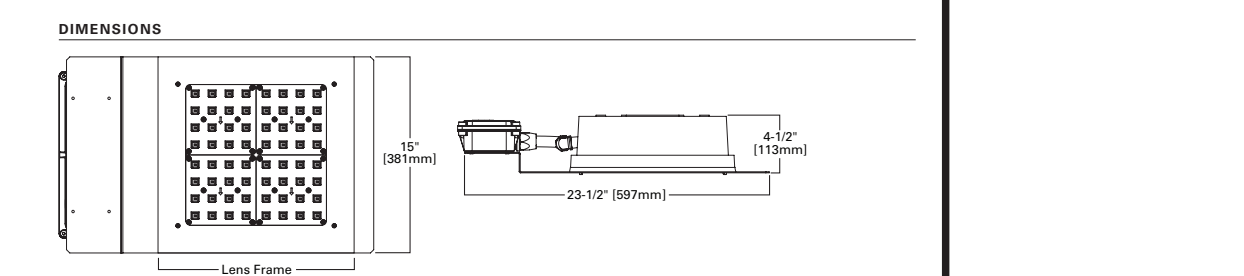

CERTIFICATION DATA

UL Listed
LM79 LMB Compliant
ANSI Compliant
RO 8001
Photometric™ Consortium Qualified™ (P9) Item

ENERGY DATA

Baseline LED Drive
-5.8 Power Factor
-25% Total Harmonic Distortion
120-277V/50 & 60Hz, 3A/7.5W/60Hz
40°C Max. Temperature
90% Max. Lumen Maintenance
40°C Max. Temperature
90% Max. Temperature (HA Option)
200 Watt

ADH12542 2012-09-27 08:48:07

COOPER Lighting www.cooperlighting.com

DRAWINGS FOR REVIEW ONLY
DO NOT USE AS CONSTRUCTION DOCUMENTS

Use of this drawing is for design aid only, not as a guarantee of code compliance.

Putterman, Scharck, & Associates, Inc.
10855 Tanner Rd.
Houston, TX 77041
applications@psaiighting.com

McCleary German Architects

Project Name: MidSouth Bank - Site

Date: 12-07-12 **Drawing No.:** SR