


5101 SITE WALLS TO 11'-0"
 SCALE: NONE

SITE RETAINING WALLS SCHEDULE			
H	W	T	10' & 12' BARS
6' TO 3'-0"	2'-3'	6'	#4's AT 12'
3'-1" TO 5'-0"	3'-3'	8'	#4's AT 12'
5'-1" TO 7'-0"	4'-3'	8'	#5's AT 12'
7'-1" TO 9'-0"	5'-3'	1'-0"	#5's AT 12'
9'-1" TO 11'-0"	6'-9"	1'-9"	#5's AT 9'

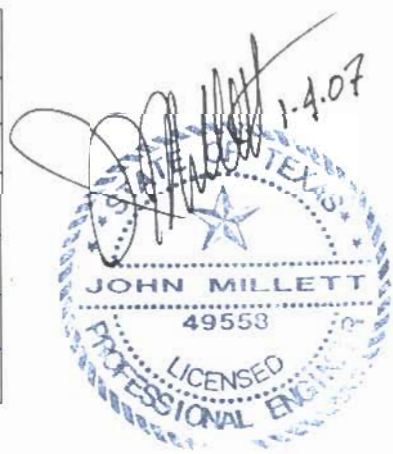

CONCRETE STRENGTH 3000 PSI AT 28 DAYS
 REINFORCING STEEL ASTM A615 GRADE 60

SITE RETAINING WALLS HAMPTON INN La JOLLA PONTE DRIVE, ROCKWALL TEXAS	
MILLETT ENGINEERING GROUP CONSULTING ENGINEERS 2824 WEST 7TH ST FORT WORTH, TEXAS 76107 817-810-9094 JAN. 4, 2007 TXPE# 49558	SW-1