


appr. by:
 drawn by:
 date: 09-30-04

revisions
10-14-04
10-29-04
04-12-05
05-02-05
05-19-05
6/15/06-15-05

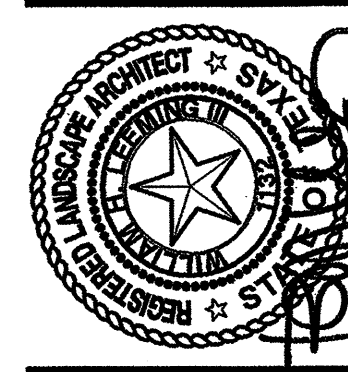

Leeming
Design Group
Landscape Architecture
Fort Worth, Texas 76115
P.O. Box 153393
972.263.0605 Fax 972.264.8060

SITE LANDSCAPE


ROCKWALL M.O.B.
RALPH HALL PARKWAY
ROCKWALL, TEXAS

file name:
c:\rockwall\MOB\phase2\fig-ph2-baseFULL.dwg



scale: 1" = 20'-0"

sheet
P-3

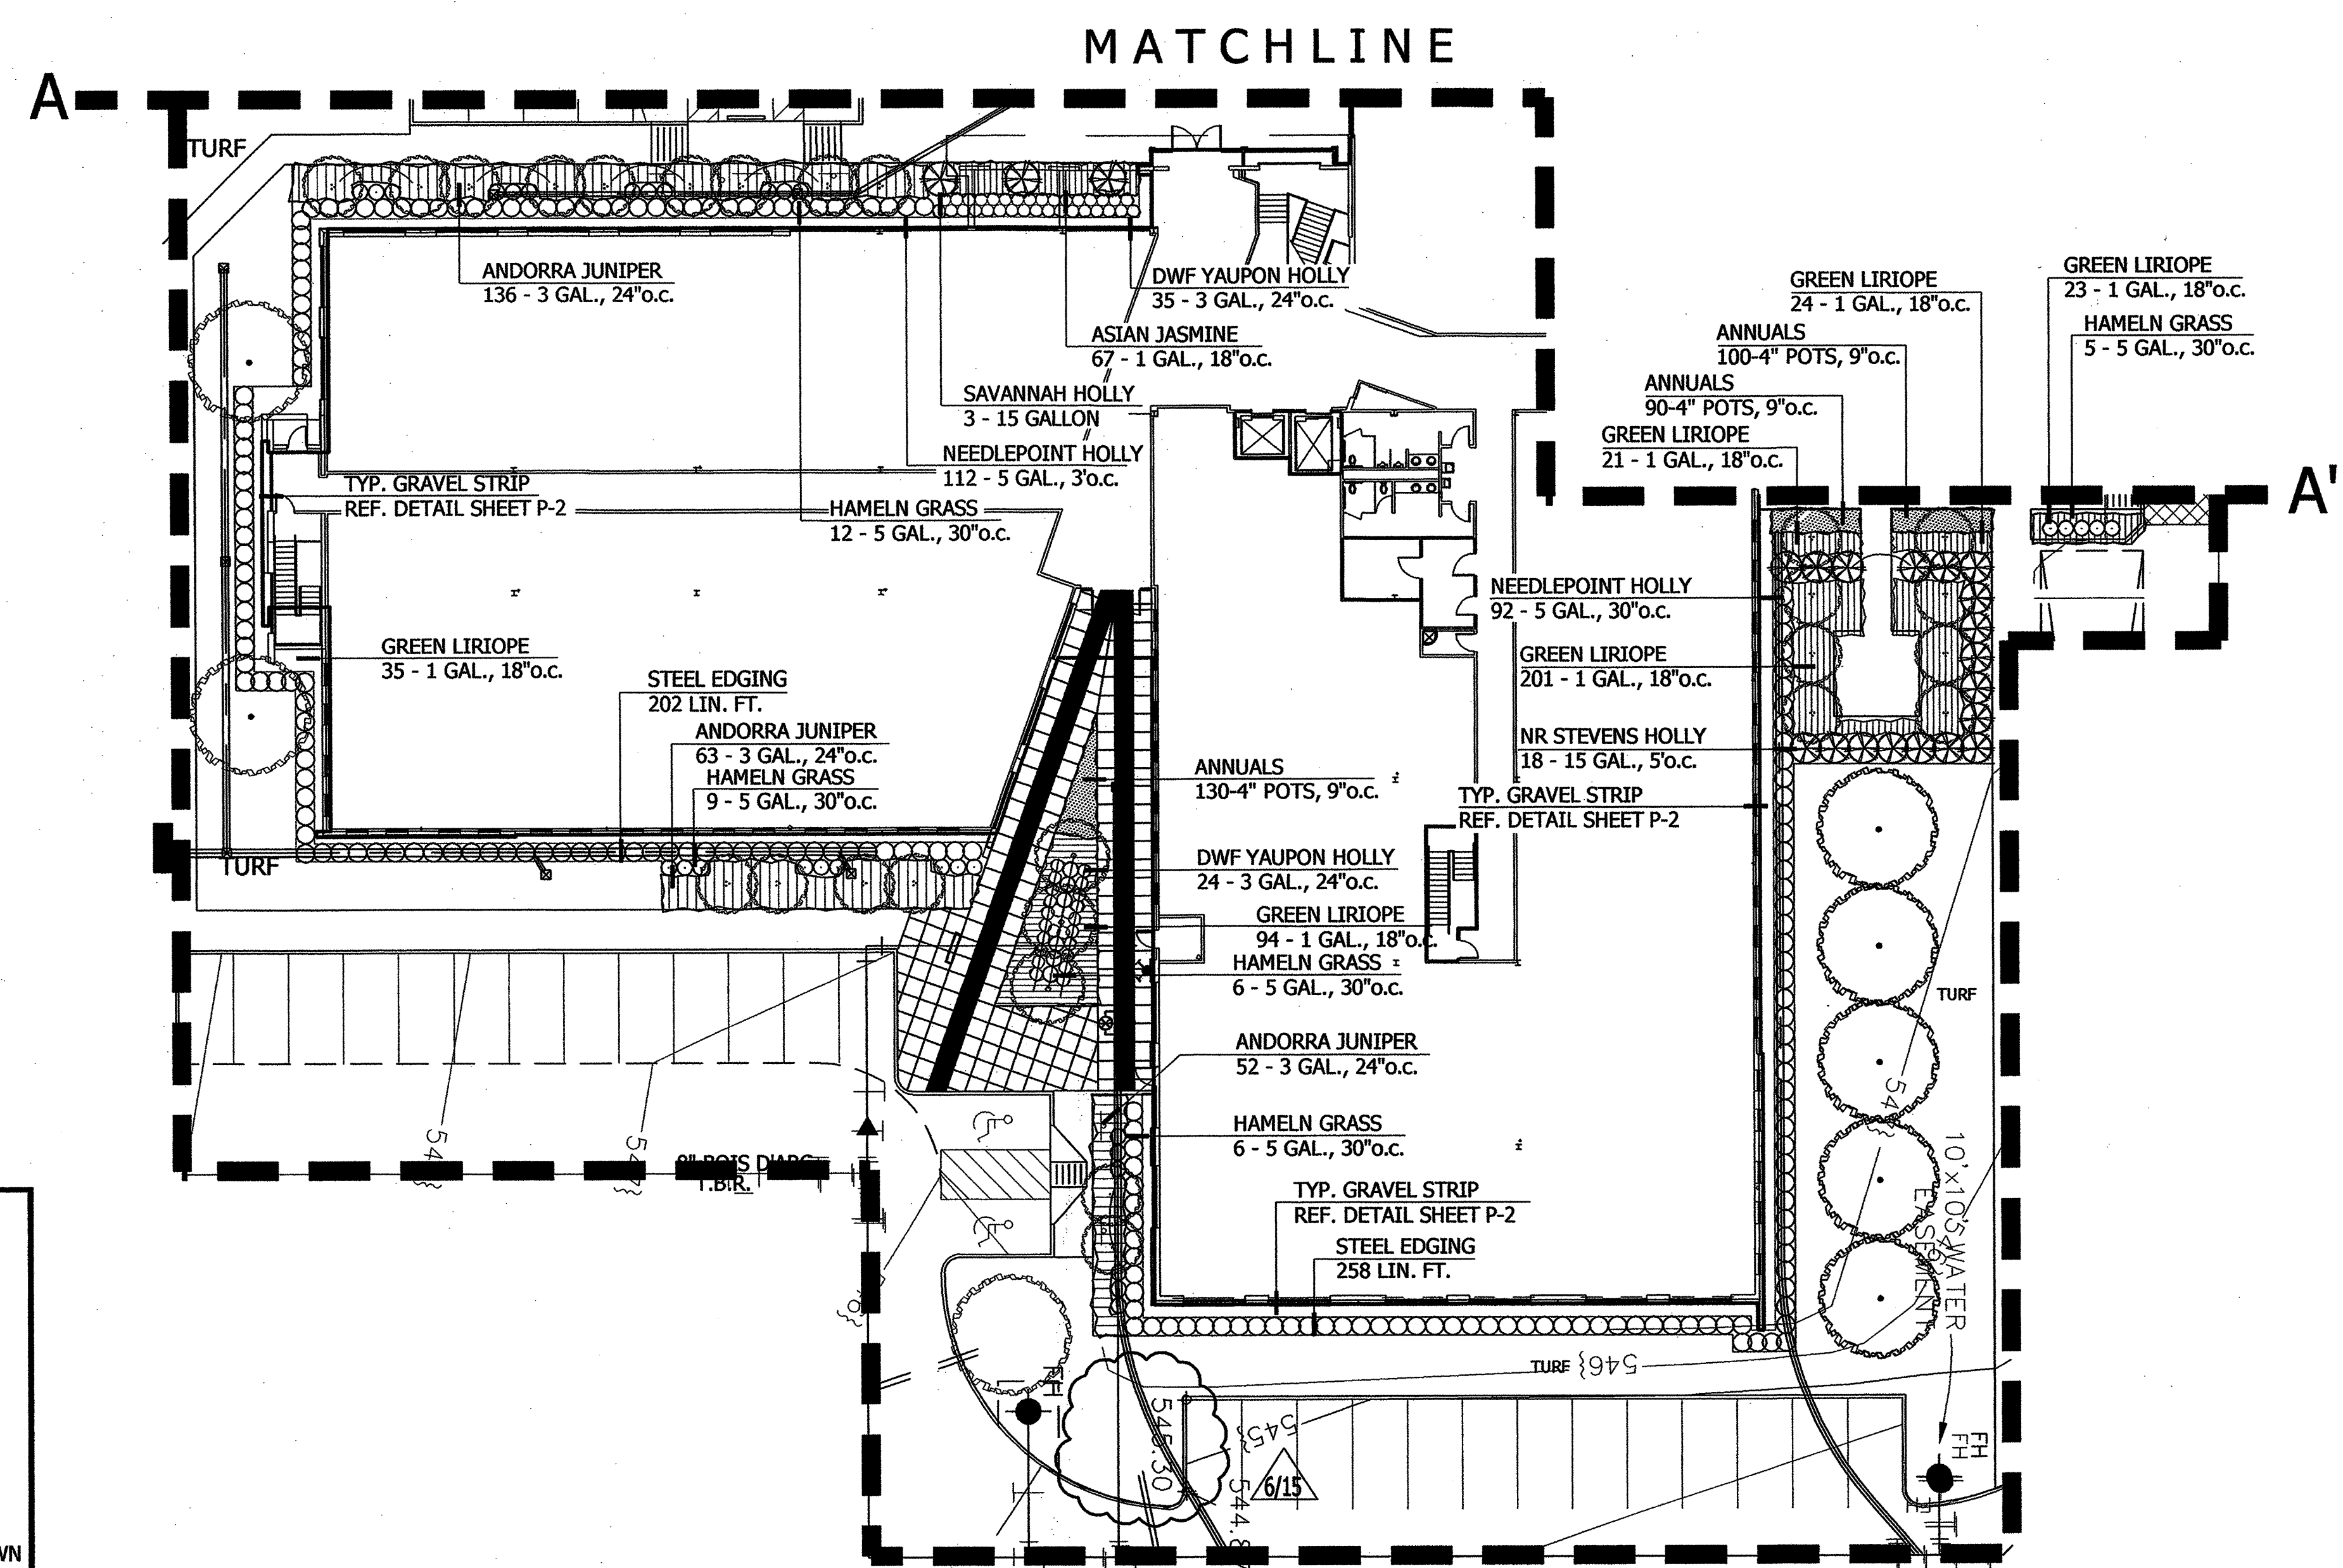

PLANTLIST

MATERIAL	QNTY	SIZE	HT	SP	NOTES
LIVE OAK QUERCUS VIRGINIANA	19	3" CAL.	10-12'	5-6'	NURSERY GROWN
BURR OAK QUERCUS MACROPHYLLA	19	3" CAL.	10-12'	5-6'	NURSERY GROWN
LACEBARK ELM ULMUS PARVIFOLIA SEMPERVIRENS	14	3" CAL.	10-12'	6-7'	NURSERY GROWN
CHINESE PISTACHE PISTACHIA CHINENSIS	10	3" CAL.	10-12'	5-6'	NURSERY GROWN
BALD CYPRESS TAXODIUM DISTICHUM	4	3" CAL.	9-11'	5-6'	NURSERY GROWN
CHINESE PISTACHE PISTACHIA CHINENSIS	10	3" CAL.	10-12'	5-6'	NURSERY GROWN
NATCHEZ CRAPE MYRTLE LAGERSTROEMIA INDICA 'NATCHEZ'	19	30 GAL.	8-10'	5-6'	CONTAINER GROWN
CRAPE MYRTLE LAGERSTROEMIA INDICA 'TUSCARORA'	14	30 GAL.	8-10'	5-6'	CONTAINER GROWN
RIVER BIRCH BETULA NIGRA	7	30 GAL.	8-10'	5-6'	CONTAINER GROWN
WAX MYRTLE MYRTICA CERIFERA	10	6-8' HT.	6-8'	3-4'	NURSERY GROWN
NR STEVENS HOLLY ILEX CORNUTA 'NEEDLEPOINT'	18	15 GAL.	4-5'	36"	FULL TO GROUND
NEEDLEPOINT HOLLY ILEX CORNUTA 'NEEDLEPOINT'	508	5 GAL.	30"	24"	FULL
SOFT-LEAF YUCCA YUCCA RECURVIFOLIA	22	5 GAL.	30"	24"	FULL
HAMELN GRASS PENNISETUM ALOPECUROIDES 'HAMELN'	61	5 GAL.	24"	20"	FULL
ANDORRA JUNIPER JUNIPERUS HORIZONTALIS 'PLUMOSA'	299	3 GAL.	12"	18"	FULL
SALVIA GREGGI SALVIA GREGGI	13	3 GAL.	12"	12"	FULL
DWF YAUPON HOLLY ILEX VOMITORIA 'NANA'	59	3 GAL.	12"	12"	FULL
CARPET ROSE ROSA SPP. 'RED'	30	2 GAL.	10"	12"	FULL
GREEN LIRIOPE LIRIOPE MUSCARI 'BIG BLUE'	1129	1 GAL.	10"	10"	FULL
ASIAN JASMINE TRACHELOSPERMUM ASIATICUM	67	1 GAL.	10"	10"	FULL
ANNUALS	650	4" POTS	TO BE DETERMINED		
STEEL EDGING	1190	LIN. FT.	REF. DETAIL		

LANDSCAPE NOTES

1. PLANT LIST FOR SHEETS P-1 THRU P-3 ONLY.
2. PLANT LIST TO BE USED AS AIDE TO BIDDER ONLY. LANDSCAPE
3. AFTER INSTALLATION OF STEEL EDGING, ALL BEDS SHALL BE TILLED TO A DEPTH OF 4-6", RAKING OUT ALL DEAD VEGETATION.
4. APPLY A 2-3" DEPTH OF ORGANIC MATERIAL OVER ENTIRE BED AND TILL INTO EXISTING SOIL. ORGANIC MATERIAL SHALL BE ONE OF FOLLOWING:
VITAL EARTH COMPOST
BACK-TO-EARTH SOIL CONDITIONER
LIVING EARTH COMPOST
SOIL BUILDING SYSTEMS COMPOST
SILVER CREEK MATERIALS COMPOST
5. TOPDRESS ENTIRE BED WITH MINIMUM 2" DEPTH SHREDDED NATIVE CEDAR MULCH.
6. ALL SHADE TREES AND ORNAMENTAL TREES SHALL BE PLANTED AS PER DETAILS ON SHEET P-1.
7. ALL AREAS LABELED "TURF" SHALL BE COMMON BERMUDA HYDROMULCH.