



DEVELOPMENT APPLICATION

City of Rockwall
Planning and Zoning Department
385 S. Goliad Street
Rockwall, Texas 75087

STAFF USE ONLY
PLANNING & ZONING CASE NO. _____

NOTE: THE APPLICATION IS NOT CONSIDERED ACCEPTED BY THE CITY UNTIL THE PLANNING DIRECTOR AND CITY ENGINEER HAVE SIGNED BELOW.

DIRECTOR OF PLANNING: _____

CITY ENGINEER: _____

Please check the appropriate box below to indicate the type of development request [SELECT ONLY ONE BOX]:

Platting Application Fees:

- Master Plat (\$100.00 + \$15.00 Acre)¹
- Preliminary Plat (\$200.00 + \$15.00 Acre)¹
- Final Plat (\$300.00 + \$20.00 Acre)¹
- Replat (\$300.00 + \$20.00 Acre)¹
- Amending or Minor Plat (\$150.00)
- Plat Reinstatement Request (\$100.00)

Site Plan Application Fees:

- Site Plan (\$250.00 + \$20.00 Acre)¹
- Amended Site Plan/Elevations/Landscaping Plan (\$100.00)

Zoning Application Fees:

- Zoning Change (\$200.00 + \$15.00 Acre)¹
- Specific Use Permit (\$200.00 + \$15.00 Acre)¹
- PD Development Plans (\$200.00 + \$15.00 Acre)¹

Other Application Fees:

- Tree Removal (\$75.00)
- Variance Request (\$100.00)

Notes:

¹: In determining the fee, please use the exact acreage when multiplying by the per acre amount. For requests on less than one acre, round up to one (1) acre.

PROPERTY INFORMATION [PLEASE PRINT]

Address **2424 Ridge Road**

Subdivision **MTA Andrews Addition**

Lot **1, 2, and 3** Block **A**

General Location **Southwest corner of Turtle Cove and Ridge Road**

ZONING, SITE PLAN AND PLATTING INFORMATION [PLEASE PRINT]

Current Zoning **C**

Current Use **Office**

Proposed Zoning **C**

Proposed Use **Office**

Acreage **9.6990**

Lots [Current] **3**

Lots [Proposed] **3**

SITE PLANS AND PLATS: By checking this box you acknowledge that due to the passage of HB3167 the City no longer has flexibility with regard to its approval process, and failure to address any of staff's comments by the date provided on the Development Calendar will result in the denial of your case.

OWNER/APPLICANT/AGENT INFORMATION [PLEASE PRINT/CHECK THE PRIMARY CONTACT/ORIGINAL SIGNATURES ARE REQUIRED]

Owner **2424 MTA Realty, LLC**

Applicant **Kimley-Horn**

Contact Person **Mark Andrews**

Contact Person **Joseph Hornisher**

Address **1900 Dalrock Rd.**

Address **13455 Noel Road**

City, State & Zip **Rowlett, Texas 75088**

City, State & Zip **Dallas, Texas 75240**

Phone **469-298-1594**

Phone **972-776-1729**

E-Mail

E-Mail **Joseph.Hornisher@Kimley-horn.com**

NOTARY VERIFICATION [REQUIRED]

Before me, the undersigned authority, on this day personally appeared Mark Andrews [Owner] the undersigned, who stated the information on this application to be true and certified the following:


"I hereby certify that I am the owner for the purpose of this application; all information submitted herein is true and correct; and the application fee of \$ _____, to cover the cost of this application, has been paid to the City of Rockwall on this the _____ day of _____, 20 _____. By signing this application, I agree that the City of Rockwall (i.e. "City") is authorized and permitted to provide information contained within this application to the public. The City is also authorized and permitted to reproduce any copyrighted information submitted in conjunction with this application, if such reproduction is associated or in response to a request for information."

Given under my hand and seal of office on this the 22nd day of December, 20 20


Owner's Signature

Mark Andrews
Kaitlyn Seidel

Notary Public in and for the State of Texas



My Commission Expires 1/29/2024

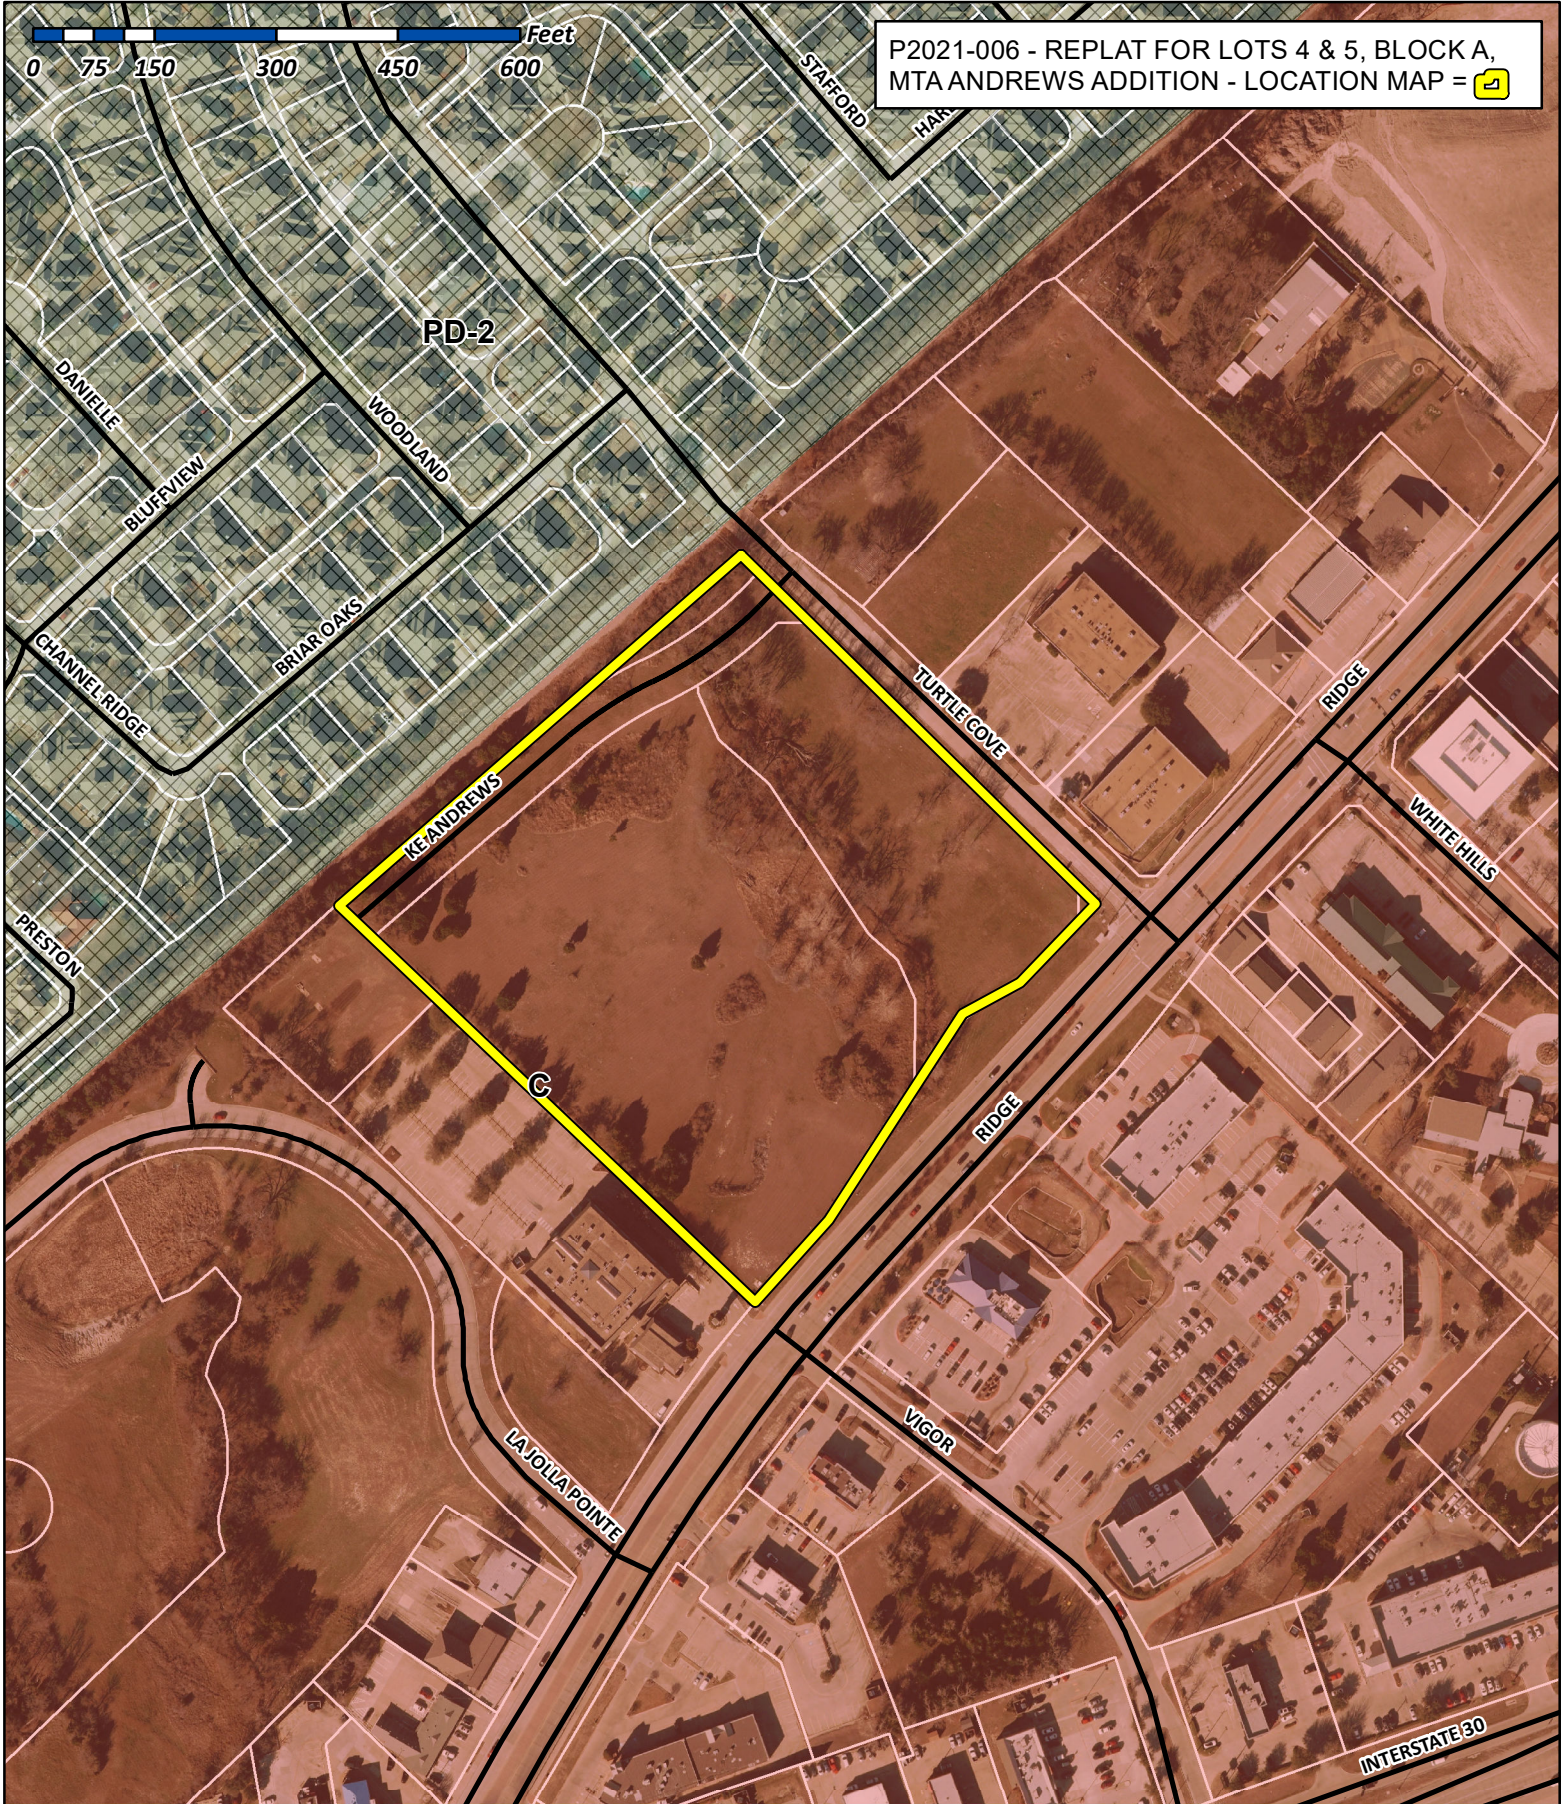

P2021-006 - REPLAT FOR LOTS 4 & 5, BLOCK A, MTA ANDREWS ADDITION - LOCATION MAP = [icon]



City of Rockwall

Planning & Zoning Department
 385 S. Goliad Street
 Rockwall, Texas 75032
 (P): (972) 771-7745
 (W): www.rockwall.com

The City of Rockwall GIS maps are continually under development and therefore subject to change without notice. While we endeavor to provide timely and accurate information, we make no guarantees. The City of Rockwall makes no warranty, express or implied, including warranties of merchantability and fitness for a particular purpose. Use of the information is the sole responsibility of the user.





DEVELOPMENT APPLICATION SUBMITTAL REQUIREMENTS

City of Rockwall
Planning and Zoning Department
385 S. Goliad Street
Rockwall, Texas 75087

PLATTING APPLICATION SUBMITTAL REQUIREMENTS [ALL PLAT TYPES]

- PLAT TYPE.
 - MINOR/AMENDING PLAT.
 - MASTER PLAT.
 - PRELIMINARY PLAT.
 - FINAL PLAT.
 - REPLAT.
 - VACATION PLAT.

Staff requires four (4), 18" x 24" copies be submitted at the time the application is submitted. See *Folding Requirements* in this development packet.

- DIGITAL COPY OF THE PLAT. The following is required with all plat submittals:

- ONE (1) PDF COPY OF THE PLAT
- ONE (1) SURVEY BOUNDARY CLOSURE REPORT.

* AFTER APPROVAL STAFF WILL REQUIRE ONE (1) AUTOCAD/ESRI (DWG, DXF, OR SHP FILE FORMAT) FILE

- TREESCAPE PLAN [IF APPLICABLE].
- LANDSCAPE PLAN [IF APPLICABLE].
- APPLICATION AND APPLICATION FEE.

SITE PLAN APPLICATION SUBMITTAL REQUIREMENTS

- PLAN SET. A plan set is composed of the following items:
 - SITE PLAN.
 - LANDSCAPE PLAN.
 - TREESCAPE PLAN.
 - PHOTOMETRIC PLAN.
 - BUILDING ELEVATIONS.

Staff requires the submittal of four (4) complete plan sets and one (1) digital copy in .pdf format with a site plan application. All sheets submitted to staff shall be 24" x 36", arranged into sets, and be folded to a 9" x 12" *Tri-Fold* with the project title or identifier facing out.

- BUILDING MATERIAL SAMPLE BOARD. See the *Material Sample Board Design Guidelines* in this development packet.
- VARIANCE REQUEST LETTER. The letter must indicate the variance being requested, the reason for the variance, and the two (2) required compensatory measures being offered to off-set the variance in accordance with the requirements of the UDC.
- APPLICATION AND APPLICATION FEE.

ZONING CHANGE APPLICATION SUBMITTAL REQUIREMENTS

- LEGAL DESCRIPTION. A legal description consists of written words that delineate a specific piece of real property. A legal description may be a metes and bounds description or, if the property is platted, a copy of the plat may be submitted to verify the lot and block survey system.
- ZONING EXHIBIT OR CONCEPT PLAN. A zoning exhibit is generally a survey, plat, concept plan or other visual description of the property [Specific Use Permit (SUP) exhibits can be a site plan or building elevations; check with staff for prior to submitting an application for what is appropriate]. Staff requires four (4), 24" x 36" copies and one digital copy (PDF preferred) be submitted at the time the application is submitted. All submittals should be folded individually so that the project title or identifier is facing out. *In order to reduce the applicant's costs and to conserve paper, staff may accept other sheet sizes for a submittal if an appropriate scale and level of detail is maintained. Check with staff prior to submitting a small or larger drawing size.*
- LETTER OF EXPLANATION. A letter from the applicant or property owner explaining the purpose of the zoning application.
- APPLICATION AND APPLICATION FEE.

IT IS IMPORTANT TO YOU AS AN APPLICANT TO RETURN A FULLY COMPLETED APPLICATION PACKAGE. INCOMPLETE APPLICATION PACKAGES WILL NOT BE ACCEPTED BY STAFF AND WILL BE RETURNED TO APPLICANTS. DUE TO THE PASSAGE OF HB3167, APPLICATIONS AND APPLICATION PACKAGES WILL ONLY BE ACCEPTED ON THE SUBMITTAL DATE AND EARLY AND/OR LATE APPLICATIONS WILL BE RETURNED.



CHECKLIST FOR PLAT SUBMITTALS

City of Rockwall
 Planning and Zoning Department
 385 S. Goliad Street
 Rockwall, Texas 75087

Case Type:

- Minor/Amending Plat
- Final Plat
- Master Plat
- Replat
- Preliminary Plat
- Vacation Plat

Case Number

Reviewed By:

Review Date:

[Case Number Field]

[Reviewed By Field]




[Review Date Field]

NOTES: The requirements listed below are based on the case type, which is indicated in the '[]' below the requirement description. On the checklist below a Replat, Minor Subdivision Plat, and Vacation Plat would be required to meet all the same requirements as a Final Plat.


Requirements	✓ = OK	N/A	Comments
Case Number [Final Plat, Preliminary Plat & Master Plat]	<input type="checkbox"/>	<input checked="" type="checkbox"/>	The case number will be provided by staff and placed in the lower right-hand corner of all new submittals.
Items Necessary for Plat Review:			
✓ Plat	<input type="checkbox"/>	<input type="checkbox"/>	[Final Plat, Preliminary Plat & Master Plat]
✓ Treescape Plan	<input type="checkbox"/>	<input type="checkbox"/>	If Applicable [Final Plat & Preliminary Plat]
✓ Landscape Plan	<input type="checkbox"/>	<input type="checkbox"/>	If Applicable [Final Plat & Preliminary Plat]
✓ Plat Reinstatement Request	<input type="checkbox"/>	<input type="checkbox"/>	Check w/ Planning Staff
Submittal Requirements [Final Plat, Preliminary Plat & Master Plat]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Four (4) large (18" x 24") folded copies and one (1) PDF digital copy of each plat is required at the time of submittal.
Engineering Information [Final Plat]	<input type="checkbox"/>	<input type="checkbox"/>	Provide accurate plat dimensions with all engineering information necessary to reproduce the plat on the ground. ENGINEERING SUBMITTAL AND APPROVAL REQUIRED PRIOR TO SUBMITTING AN APPLICATION FOR FINAL PLAT.
Title Block:			
Type of Plat [Master, Preliminary, Final or Replat]			
Subdivision Name (Proposed or Approved)			
Lot / Block Designation	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Provide the title block information in the lower right-hand corner.
Number of Lots (Proposed)			
Total Acreage			
City, State, County			
Owner, Developer, and/or Surveyor/Engineer (Name/Address/Phone Number/Date of Preparation) [Final Plat & Preliminary Plat]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	This includes the names and addresses of the sub dividers, record owner, land planner, engineer and/or surveyor. The date of plat preparation should also be put in the lower right-hand corner.
Survey Monuments/State Plane Coordinates [Final Plat]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The location of the development is required to be tied to a Rockwall monument, or tie two (2) corners to state plan coordinates (NAD 83 State Plane Texas, North Central [7202], US Survey Feet).
Vicinity Map [Final Plat & Preliminary Plat]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	A Vicinity Map should show the boundaries of the proposed subdivision relative to the rest of the city.
North Point [Final Plat & Preliminary Plat]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	The north point or north arrow must be facing true north (or straight up) on all plans, unless the scale of the drawings or scope of the project requires a different position.
Numeric and Graphic Scale [Final Plat & Preliminary Plat]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Plats should be drawn to an Engineering Scale of 1"=50', 1"=100', etc...
Subdivision (Boundary, Acreage, and Square Footage) [Final Plat, Preliminary Plat & Master Plat]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the subdivision boundary lines, and acreage and square footage. For Master Plats provide a schematic layout of the entire tract to be subdivided, any remainder tracts and its relationship to adjacent property and existing adjoining developments.
Lot and Block (Designation, Width, Depth and Area) [Final Plat & Preliminary Plat]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Identification of each lot and block by number or letter. For each lot indicate the square footage and acreage or provide a calculation sheet. Also provide a lot count.
Dwelling Units/Population Density [Master Plat]	<input type="checkbox"/>	<input type="checkbox"/>	Indicate the proposed number of dwelling units and population densities.
Building Setbacks [Final Plat & Preliminary Plat]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Label the building lines where adjacent to a street.
Easements [Final Plat & Preliminary Plat]	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Label all existing and proposed easements relative to the site and include the type, purpose and width.

City Limits <i>[Final Plat, Preliminary Plat & Master Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the location of the City Limits, contiguous or within the platting area.
Utilities (P)	<input type="checkbox"/>	<input type="checkbox"/>	Indicate the locations of all existing and proposed utilities. Include the size and type of each.
Property Lines <i>[Final Plat, Preliminary Plat & Master Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Provide all the proposed and platted property lines.
Streets <i>[Final Plat, Preliminary Plat & Master Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Label all proposed and existing streets with the proposed or approved names. For Master Plats indicate the existing arterials and collector streets to serve the land to be platted consistent with the Thoroughfare Plan or proposed amendments.
Right-Of-Way and Centerline <i>[Final Plat, Preliminary Plat & Master Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Label the right-of-way width and street centerline for each street both within and adjacent to the development.
Additional Right-Of-Way <i>[Final Plat & Preliminary Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Indicate the location and dimensions of any proposed right-of-way dedication.
Corner Clips <i>[Final Plat & Preliminary Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate all existing and proposed corner clips and any subsequent dedication.
Median Openings <i>[Preliminary Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Locate and identify existing and/or proposed median openings and left turn channelization.
Topographical Contours <i>[Preliminary Plat & Master Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Topographical information and physical features to include contours at 2-foot intervals.
Flood Elevations <i>[Preliminary Plat & Master Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Show 100-Year & 50-Year floodplain and floodway boundaries (if applicable).
Drainage Areas <i>[Preliminary Plat & Master Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Show all drainage areas and all proposed storm drainages areas with sizes if applicable.
Wooded Areas <i>[Preliminary Plat & Master Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Indicate the boundaries of all adjacent wooded areas.
Zoning and Land Use Information <i>[Preliminary Plat & Master Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Indicate all proposed land uses, and existing and proposed zoning classifications. For Master Plats indicate the proposed major categories of land use.
Existing Man-Made Features <i>[Master Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Indicate all significant man-made features such as railroad, roads, buildings, utilities or other physical structures as shown on USGS topographic maps, utility company records and city records when such features affect the plans.
Parks and Open Space <i>[Preliminary Plat & Master Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Identify the dimensions, names and description of all parks and open spaces, both existing and proposed. For Master Plats also indicate schools and other public uses as consistent with those shown in the comprehensive plan.
Proposed Improvements <i>[Preliminary Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Indicate how the proposed improvements would relate to those in the surrounding area.
Water Sources <i>[Preliminary Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Indicate water sources inside the city limits or in the extraterritorial jurisdiction (ETJ).
Sewage Disposal <i>[Preliminary Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Indicate sewage disposal method inside the city limits or in the extraterritorial jurisdiction (ETJ).
Adjacent Properties <i>[Final Plat & Preliminary Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Record owners of contiguous parcels of subdivided land, names and lot patterns of contiguous subdivisions, approved Concept Plans, reference recorded subdivision plats adjoining platted land by record name and by deed record volume and page.
Phasing Plan <i>[Master Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Designation of each phase of development within the subdivision, the order of development, and a schedule for the development of each phase of the master plan.
Dedication <i>[Final Plat, Preliminary Plat & Master Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Indicate the boundary lines, dimensions and descriptions, of spaces to be dedicated for public use of the inhabitants of the development.
Statement of Service <i>[Master Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Provide a detailed statement of how the proposed subdivision will be served by water, wastewater, roadway and drainage facilities that have adequate capacity to serve the development.
Standard Plat Wording <i>[Final Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Provide the appropriate plat wording provided in the application packet that details the designation of the entity responsible for the operation and maintenance of any commonly held property and a waiver releasing the city of such responsibility, a waiver releasing the City for damages in establishment or alteration of grade.
Legal Description <i>[Final Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Place the Legal Description (Metes and Bounds Description/Field Notes) where indicated in the Owner's Certificate per the application packet.
Storm Drainage Improvements Statement <i>[Final Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Provide the appropriate statement of developer responsibility for storm drainage improvements found in the application packet.

Dedication Language <i>[Final Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Provide the instrument of dedication or adoption signed by the owners, which is provided in the application packet.
Seal/Signature <i>[Final Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Required to have the seal and signature of surveyor responsible for the surveying the development and/or the preparation of the plat.
Public Improvement Statement <i>[Final Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Proved the appropriate statement indicating that no building permits will be issued until all public improvements are accepted by the City as provided in the application packet.
Plat Approval Signatures <i>[Final Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Provide a space for signatures attesting approval of the plat.
Compliance with Preliminary Plat <i>[Final Plat]</i>	<input type="checkbox"/>	<input type="checkbox"/>	Does the plat comply with all the special requirements developed in the preliminary plat review?
Review Plans with Franchise Utility Companies <i>[Final Plat, Preliminary Plat & Master Plat]</i>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Review the proposed plans and plat with electric, gas, cable and phone companies.

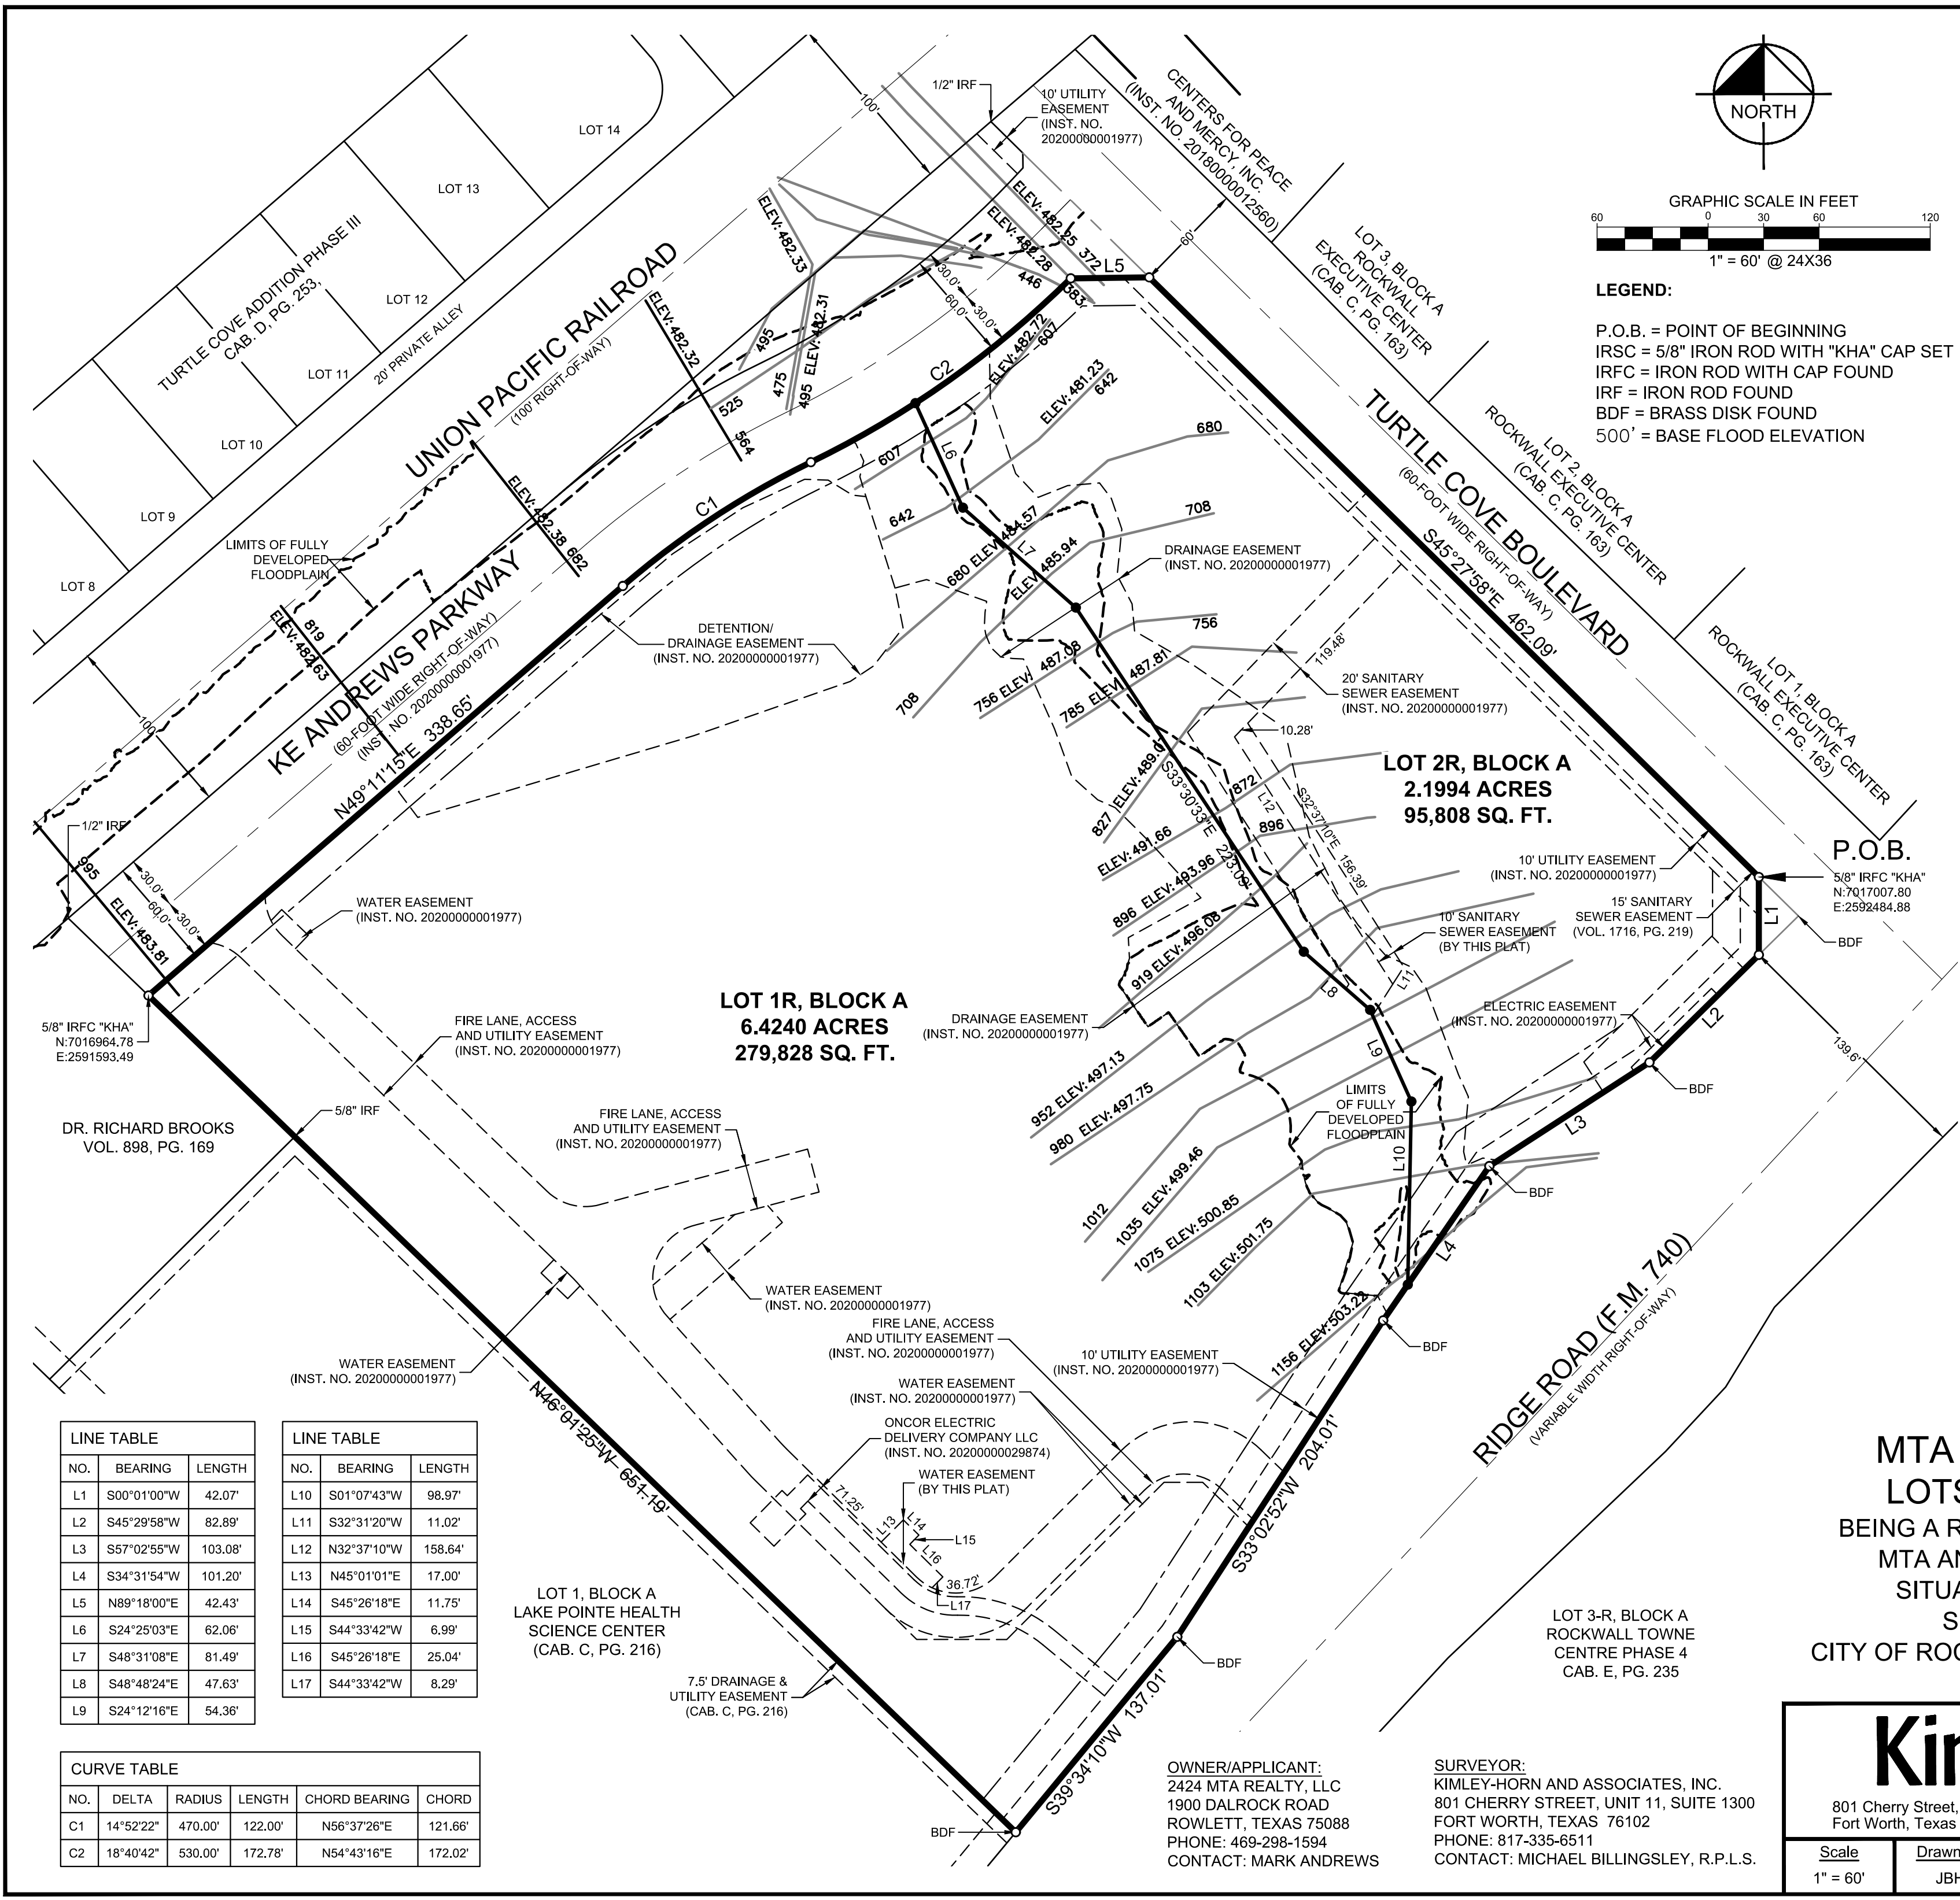

LEGEND:
 P.O.B. = POINT OF BEGINNING
 IRSC = 5/8" IRON ROD WITH "KHA" CAP SET
 IRFC = IRON ROD WITH CAP FOUND
 IRF = IRON ROD FOUND
 BDF = BRASS DISK FOUND
 500' = BASE FLOOD ELEVATION

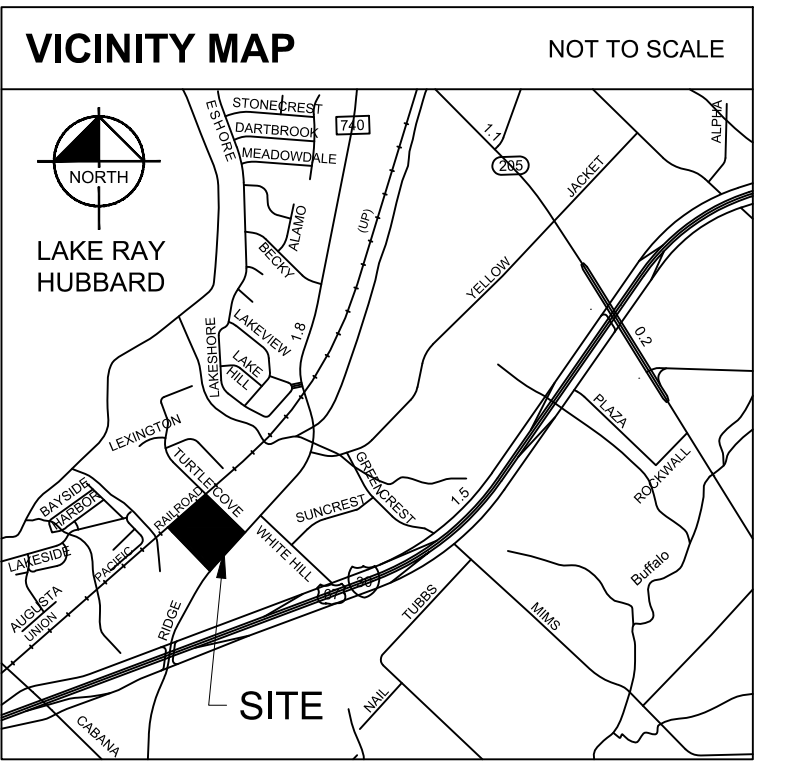

- NOTES:**
- It shall be the policy of the City of Rockwall to withhold issuing building permits until all streets, water, sewer and storm drainage systems have been accepted by the City. The approval of a plat by the City does not constitute any representation, assurance or guarantee that any building within such plat shall be approved, authorized or permit therefore issued, nor shall such approval constitute any representation, assurance or guarantee by the City of the adequacy and availability for water for personal use and fire protection within such plat, as required under Ordinance 83-54.
 - Bearing system based on the Texas Coordinate System of 1983, North Central Zone (4202), North American Datum of 1983(2011).
 - The coordinates shown hereon are grid values of the Texas Coordinate System of 1983, North Central Zone (4202), North American Datum of 1983(2011).
 - The distances shown hereon are surface values. The combined scale factor for this plat is 0.999855936.
 - Property owner shall be responsible for all liability maintenance, repairs, and reconstruction of drainage and detention easements on site.
 - The purpose of this replat is to dedicate an additional sanitary sewer easement and water easement.

LINE TABLE

NO.	BEARING	LENGTH
L1	S00°01'00"W	42.07'
L2	S45°29'58"W	82.89'
L3	S57°02'55"W	103.08'
L4	S34°31'54"W	101.20'
L5	N89°18'00"E	42.43'
L6	S24°25'03"E	62.06'
L7	S48°31'08"E	81.49'
L8	S48°48'24"E	47.63'
L9	S24°12'16"E	54.36'

LINE TABLE

NO.	BEARING	LENGTH
L10	S01°07'43"W	98.97'
L11	S32°31'20"W	11.02'
L12	N32°37'10"W	158.64'
L13	N45°01'01"E	17.00'
L14	S45°26'18"E	11.75'
L15	S44°33'42"W	6.99'
L16	S45°26'18"E	25.04'
L17	S44°33'42"W	8.29'

CURVE TABLE

NO.	DELTA	RADIUS	LENGTH	CHORD BEARING	CHORD
C1	14°52'22"	470.00'	122.00'	N56°37'26"E	121.66'
C2	18°40'42"	530.00'	172.78'	N54°43'16"E	172.02'

REPLAT
MTA ANDREWS ADDITION
LOTS 1R AND 2R, BLOCK A
 BEING A REPLAT OF LOTS 1 AND 2, BLOCK A
 MTA ANDREWS ADDITION, AND BEING
 SITUATED IN THE E.P. GAINS CHISM
 SURVEY, ABSTRACT NO. 64
 CITY OF ROCKWALL ROCKWALL COUNTY, TEXAS
 CASE NO. P2019-047

Kimley»Horn

801 Cherry Street, Unit 11, # 1300
Fort Worth, Texas 76102 FIRM # 10194040 Tel. No. (817) 335-6511
www.kimley-horn.com

Scale 1" = 60'	Drawn by JBH	Checked by MCB	Date 1/12/2021	Project No. 064539200	Sheet No. 1 OF 1
-------------------	-----------------	-------------------	-------------------	--------------------------	---------------------

OWNER/APPLICANT:
 2424 MTA REALTY, LLC
 1900 DALROCK ROAD
 ROWLETT, TEXAS 75088
 PHONE: 469-298-1594
 CONTACT: MARK ANDREWS

SURVEYOR:
 KIMLEY-HORN AND ASSOCIATES, INC.
 801 CHERRY STREET, UNIT 11, SUITE 1300
 FORT WORTH, TEXAS 76102
 PHONE: 817-335-6511
 CONTACT: MICHAEL BILLINGSLEY, R.P.L.S.

DWG NAME: K:\ITW_SURVEY\064539200\KE ANDREWS OFFICE - ROCKWALL\DWG_PLOTTED BY: HOPPER, BRADIN 2/10/2021 8:51 AM LAST SAVED 2/9/2021 2:34 PM

NOW, THEREFORE, KNOW ALL MEN BY THESE PRESENTS:

**STATE OF TEXAS
COUNTY OF ROCKWALL**

I (we) the undersigned owner(s) of the land shown on this plat, and designated herein as the **MTA Andrews Addition** to the City of Rockwall, Texas, and whose name is subscribed hereto, hereby dedicate to the use of the public forever all streets, alleys, parks, watercourses, drains, easements and public places thereon shown on the purpose and consideration therein expressed. I (we) further certify that all other parties who have a mortgage or lien interest in the **MTA Andrews Addition** have been notified and signed this plat. I (we) understand and do hereby reserve the easement strips shown on this plat for the purposes stated and for the mutual use and accommodation of all utilities desiring to use or using same. I (we) also understand the following;

- No buildings shall be constructed or placed upon, over, or across the utility easements as described herein.
- Any public utility shall have the right to remove and keep removed all or part of any buildings, fences, trees, shrubs, or other growths or improvements which in any way endanger or interfere with construction, maintenance or efficiency of their respective system on any of these easement strips; and any public utility shall at all times have the right of ingress or egress to, from and upon the said easement strips for purpose of construction, reconstruction, inspecting, patrolling, maintaining, and either adding to or removing all or part of their respective system without the necessity of, at any time, procuring the permission of anyone.
- The City of Rockwall will not be responsible for any claims of any nature resulting from or occasioned by the establishment of grade of streets in the subdivision.
- The developer and subdivision engineer shall bear total responsibility for storm drain improvements.
- The developer shall be responsible for the necessary facilities to provide drainage patterns and drainage controls such that properties within the drainage area are not adversely affected by storm drainage from the development.
- No house dwelling unit, or other structure shall be constructed on any lot in this addition by the owner or any other person until the developer and/or owner has complied with all requirements of the Subdivision Regulations of the City of Rockwall regarding improvements with respect to the entire block on the street or streets on which property abuts, including the actual installation of streets with the required base and paving, curb and gutter, water and sewer, drainage structures, storm structures, storm sewers, and alleys, all according to the specifications of the City of Rockwall; or
Until an escrow deposit, sufficient to pay for the cost of such improvements, as determined by the city's engineer and/or city administrator, computed on a private commercial rate basis, has been made with the city secretary, accompanied by an agreement signed by the developer and/or owner, authorizing the city to make such improvements at prevailing private commercial rates, or have the same made by a contractor and pay for the same out of the escrow deposit, should the developer and/or owner fail or refuse to install the required improvements within the time stated in such written agreement, but in no case shall the City be obligated to make such improvements itself. Such deposit may be used by the owner and/or developer as progress payments as the work progresses in making such improvements by making certified requisitions to the city secretary, supported by evidence of work done; or
Until the developer and/or owner files a corporate surety bond with the city secretary in a sum equal to the cost of such improvements for the designated area, guaranteeing the installation thereof within the time stated in the bond, which time shall be fixed by the city council of the City of Rockwall.
- Property owner shall be responsible for maintaining, repairing, and replacing all systems within the drainage and detention easements.

I (we) further acknowledge that the dedications and/or exaction's made herein are proportional to the impact of the Subdivision upon the public services required in order that the development will comport with the present and future growth needs of the City; I (we), my (our) successors and assigns hereby waive any claim, damage, or cause of action that I (we) may have as a result of the dedication of exactions made herein.

By: 2424 MTA Realty, LLC

By: MTAA, LLC, its Sole Manager

By: _____
Mark Andrews, its Sole Manager

**STATE OF TEXAS §
COUNTY OF _____ §**

BEFORE ME, the undersigned, a Notary Public in and for the said County and State, on this day personally appeared Mark Andrews, known to me to be the person whose name is subscribed to the foregoing instrument and acknowledged to me that he executed the same for the purpose therein expressed and under oath stated that the statements in the foregoing certificate are true.

GIVEN UNDER MY HAND AND SEAL OF OFFICE this _____ day of _____, 2021.


Notary Public in and for the State of Texas

SURVEYOR'S STATEMENT

I, Michael C. Billingsley, a Registered Professional Land Surveyor, licensed by the State of Texas, affirm that this plat was prepared under my direct supervision, from recorded documentation, evidence collected on the ground during field operations and other reliable documentation; and that this plat substantially complies with the Rules and Regulations of the Texas Board of Professional Land Surveying.

Dated this the 9th day of February, 2021.

Michael C. Billingsley
Registered Professional Land Surveyor No. 6558
Kimley-Horn and Associates, Inc.
801 Cherry Street, Unit 11, Suite 1300
Fort Worth, Texas 76102
Ph. 817-770-6511
michael.billingsley@kimley-horn.com

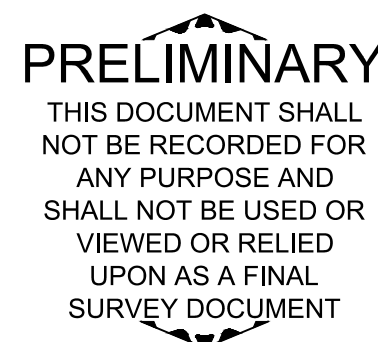

**STATE OF TEXAS
COUNTY OF ROCKWALL**

WHEREAS, 2424 MTA REALTY, LLC, is the owner of a tract of land in situated in the situated in the E. P. Gains Survey, Abstract No. 64, City of Rockwall, Rockwall County, Texas, and being all of Lots 1 and 2, Block A, MTA Andrews Addition, an addition to the City of Rockwall, Texas, according to the plat recorded in Instrument No. 20200000001977 of the Official Public Records of Rockwall County, Texas, and being all of a tract of land described in Special Warranty Deed to 2424 MTA Realty, LLC, recorded in Instrument No. 20190000003297, Official Public Records of Rockwall County, Texas and being more particularly described as follows:

BEGINNING at a 5/8-inch iron rod with cap stamped "KHA" found at the north end of a right-of-way corner clip at the intersection of the southwest right-of-way line of Turtle Cove Boulevard (a 60-foot wide right-of-way) and the northwest right-of-way line of Ridge Road (F.M. 740, a variable width right-of-way);

THENCE South 0°01'00" West, along the said right-of-way corner clip, a distance of 42.07 feet to a 5/8-inch iron rod with cap stamped "KHA" found at the south end of the said corner clip;

THENCE along the said northwest right-of-way line, the following courses and distances to wit:

- South 45°29'58" West, a distance of 82.89 feet to a brass disk found for corner;
- South 57°02'55" West, a distance of 103.08 feet (Deed:103.07 feet) to a brass disk found for corner;
- South 34°31'54" West, a distance of 101.20 feet (Deed:101.12 feet) to a brass disk found for corner;
- South 33°02'52" West, a distance of 204.01 feet (Deed:204.12 feet) to a brass disk found for corner;
- South 39°34'10" West, a distance of 137.01 feet (Deed:136.97 feet) to a brass disk found at the easternmost corner of Lot 1, Block A, Lake Pointe Health Science Center, an addition to the City of Rockwall County, Texas according to the plat thereof recorded in Cabinet C, Page 216, Map Records of Rockwall, Texas;

THENCE departing said northwest right-of-way line and with the northeast line of said Lot 1, Block A and the northeast line of a tract of land described in Warranty Deed to Dr. Richard Brooks, recorded in Volume 898, Page 169, Deed Records of Rockwall County, Texas, North 46°01'25" West, at a distance of 651.19 to a 5/8-inch iron rod with cap stamped "KHA" found in the southeast right-of-way line of KE Andrews Parkway (60-foot wide right-of-way), and being the northwest corner of said Lot 1, Block A, MTA Andrews Addition;

THENCE along the said southeast right-of-way line, the following courses and distances to wit:

- North 49°11'15" East, a distance of 338.65 feet to a 5/8-inch iron rod with cap stamped "KHA" found at the beginning of a tangent curve to the right having a central angle of 14°52'22", a radius of 470.00 feet, a chord bearing and distance of North 56°37'26" East, 121.66 feet;
- In a northeasterly direction, with said curve to the right, an arc distance of 122.00 feet to a 5/8-inch iron rod with cap stamped "KHA" found at the beginning of a reverse curve to the left having a central angle of 18°40'42", a radius of 530.00 feet, a chord bearing and distance of North 54°43'16" East, 172.02 feet;
- In a northeasterly direction, with said curve to the left, an arc distance of 172.78 feet to a 5/8-inch iron rod with cap stamped "KHA" found at the west end of a right-of-way corner clip at the intersection of the said southeast right-of-way line of KE Andrews Parkway and the said southwest right-of-way line of Turtle Cove Boulevard;

THENCE North 89°18'00" East, along the said right-of-way corner clip, a distance of 42.43 feet to a 5/8-inch iron rod with cap stamped "KHA" found at the east end of the said corner clip;

THENCE South 45°27'58" East, along the said southwest right-of-way line of Turtle Cove Boulevard, a distance of 462.09 feet to the **POINT OF BEGINNING** and containing 8.6234 acres or 375,636 square feet of land, more or less.

RECOMMENDED FOR FINAL APPROVAL		
_____		_____
Planning and Zoning Commission		Date
APPROVED		
I hereby certify that the above and foregoing plat of an addition to the City of Rockwall, Texas, was approved by the City Council of th City of Rockwall on the ____ day of _____, 2021.		
This approval shall be invalid unless the approved plat for such addition is recorded in the office of the County Clerk of Rockwall, County, Texas, within one hundred eighty (180) days from said date of final approval.		
WITNESS OUR HANDS, this ____ day of _____, 2021.		
_____	_____	_____
Mayor, City of Rockwall	City Secretary	City Engineer

**REPLAT
MTA ANDREWS ADDITION
LOTS 1R AND 2R, BLOCK A
BEING A REPLAT OF LOTS 1 AND 2, BLOCK A
MTA ANDREWS ADDITION, AND BEING
SITUATED IN THE E.P. GAINS CHISM
SURVEY, ABSTRACT NO. 64
CITY OF ROCKWALL ROCKWALL COUNTY, TEXAS
CASE NO. P2019-047**



801 Cherry Street, Unit 11, # 1300
Fort Worth, Texas 76102 FIRM # 10194040 Tel. No. (817) 335-6511
www.kimley-horn.com

<u>Scale</u>	<u>Drawn by</u>	<u>Checked by</u>	<u>Date</u>	<u>Project No.</u>	<u>Sheet No.</u>
N/A	JBH	MCB	1/12/2021	064539200	1 OF 1

OWNER/APPLICANT:
2424 MTA REALTY, LLC
1900 DALROCK ROAD
ROWLETT, TEXAS 75088
PHONE: 469-298-1594
CONTACT: MARK ANDREWS

SURVEYOR:
KIMLEY-HORN AND ASSOCIATES, INC.
801 CHERRY STREET, UNIT 11, SUITE 1300
FORT WORTH, TEXAS 76102
PHONE: 817-335-6511
CONTACT: MICHAEL BILLINGSLEY, R.P.L.S.