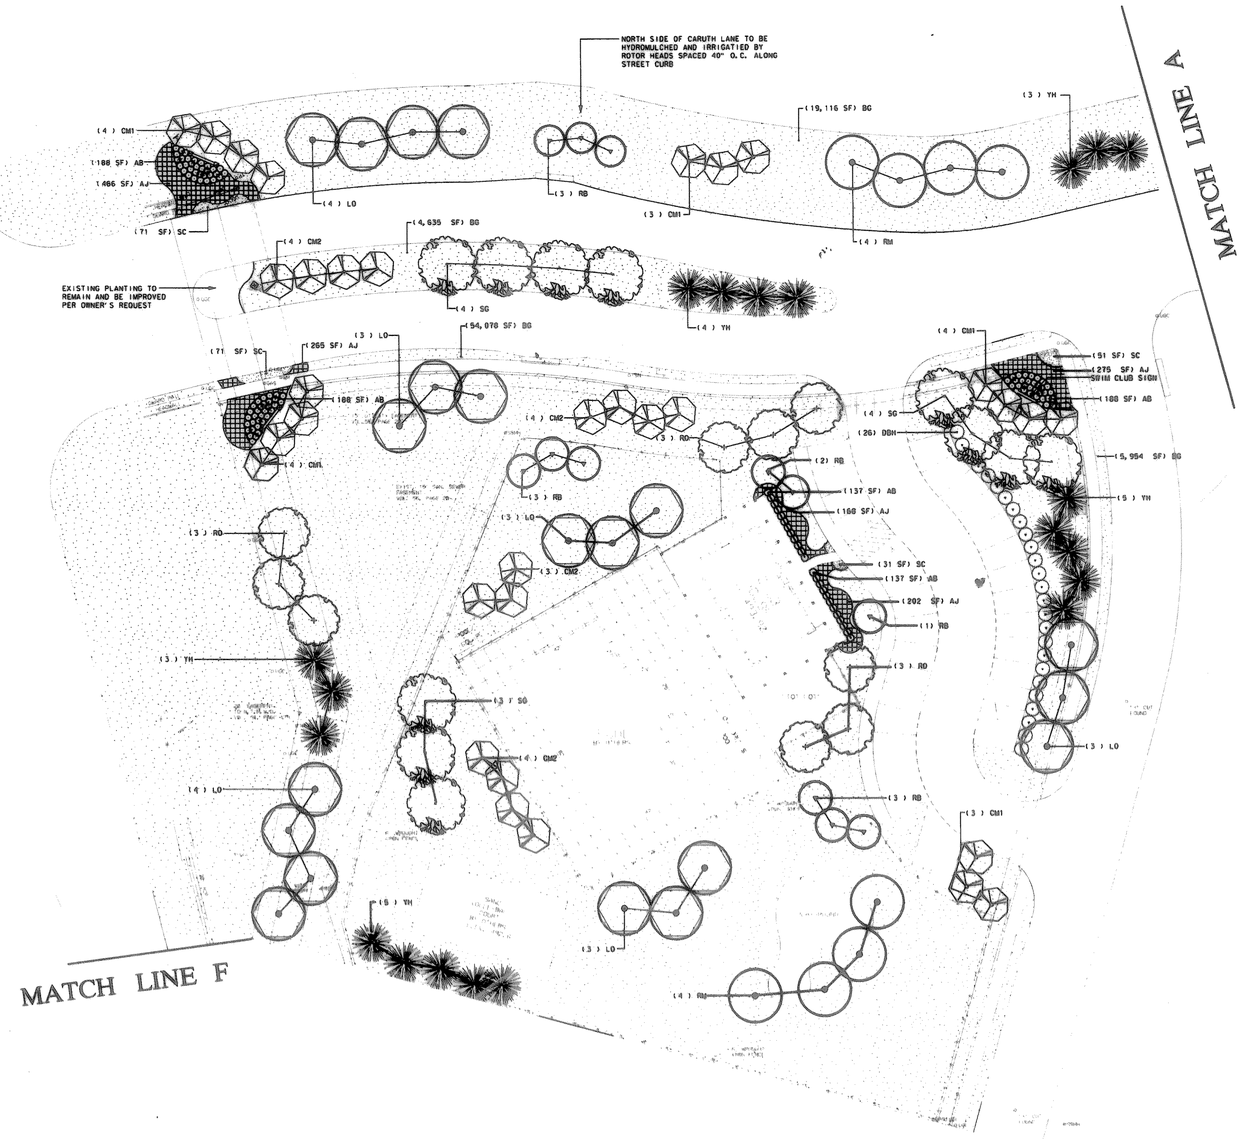

PLANT LEGEND

- (SG) - SWEET GUM
- (RO) - RED OAK
- (RM) - RED MAPLE
- (LO) - LIVE OAK
- (YH) - YAUPON HOLLY
- (RB) - RED BUD
- (CM1) - CRAPE MYRTLE
- (CM2) - CRAPE MYRTLE
- (DBH) - DWARF BURFORD HOLLY
- (AB) - ABELIA
- (AJ) - ASIAN JASMINE
- (SC) - SEASONAL COLOR
- (BG) - BERMUDA GRASS

PLANT LIST - THIS SHEET

SYMBOL	QUANT.	COMMON NAME	BOTANICAL NAME	SIZE	COND.	REMARKS
LARGE TREES						
SG	11	SWEET GUM	LIQUIDAMBAR STYRACIFLUA	3" - 3½" CALIPER	B & B	SPECIMEN QUALITY
LO	20	LIVE OAK	QUERCUS VIRGININA	3" - 3½" CALIPER	B & B	SPECIMEN QUALITY
RO	9	RED OAK	QUERCUS SHUMARDI	3" - 3½" CALIPER	B & B	SPECIMEN QUALITY
RM	8	RED MAPLE	ACER RUBRUM	3" - 3½" CALIPER	B & B	SPECIMEN QUALITY
SMALL TREES						
YH	20	YAUPON HOLLY	ILEX VOMITORIA	10' - 12'	B & B	FEMALE 3 - 5 CANES
RB	12	WHITE RED BUD	CERCIS CANADENSIS ALBA	3" MIN.	B & B	SPECIMEN QUALITY
CM1	18	CRAPE MYRTLE	LAGERSTROEMIA INDICA	10' - 12' HEIGHT	B & B	3 - 5 CANES "WATERMELON RED"
CM2	15	CRAPE MYRTLE	LAGERSTROEMIA INDICA	10' - 12' HEIGHT	B & B	3 - 5 CANES "WHITE"
SHRUBS						
DBH	26	DWARF BURFORD HOLLY	ILEX CORNUTA	3 GAL.	CONT.	36" O.C. NOT TRIANGULAR
AB	858 SF	ABELIA	ABELIA x GRANDIFLORA 'SHERWOODII'	3 GAL.	CONT.	36" O.C. TRIANGULAR SPACING
GROUND COVER						
SC	224 SF	SEASONAL COLOR	OWNER'S CHOICE	4" POTS	CONT.	8" O.C. TRIANGULAR SPACING
AJ	1,137 SF	ASIAN JASMINE	TRACHELOSPERMUM ASIATICUM	4" POTS	CONT.	8" O.C. TRIANGULAR SPACING
TURF						
BG	79,148 SF	COMMON BERMUDA	CYNODON DACTYLON			HYDROSEED

NOTES:

1. ALL SITE FEATURE LOCATIONS SHALL BE STAKED IN FIELD BY THE CONTRACTOR AND APPROVED BY THE LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
2. FINE GRADING SHALL BE PERFORMED IN ALL AREAS TO BE SEEDED. FINE GRADING SHALL INCLUDE THE REMOVAL OF DEBRIS, ROCKS, ETC. FROM THE SITE, AND INSURE POSITIVE DRAINAGE IN ALL AREAS TO BE SEEDED.
3. THE CONTRACTOR SHALL VERIFY ALL BUILDING SETBACK LINES, EASEMENT LINES, AND VISIBILITY LINES IN THE FIELD PRIOR TO CONSTRUCTION.
4. THE CONTRACTOR SHALL VERIFY LOCATIONS OF ALL UTILITIES IN THE FIELD PRIOR TO COMMENCEMENT OF WORK. (REFER TO CARUTH LAKES CONSTRUCTION DOCUMENTS)
5. WRITTEN DIMENSIONS SHALL GOVERN OVER SCALED DIMENSIONS.
6. PROVIDE POSITIVE DRAINAGE AWAY FROM ALL SITE FEATURES.
7. ALL CONSTRUCTION TO BE PERFORMED PER LOCAL CITY AND STATE GUIDELINES.

0 15 30 60

SWIM CLUB PLANTING PLAN

STATE OF TEXAS
J. DAVID RHOADES, II
1685
REGISTERED LANDSCAPE ARCHITECT

LUMBERMEN'S INVESTMENT, INC.
5495 BELTLINE RD., SUITE 225
DALLAS, TX 75240

CARUTH LAKES SWIM CLUB

ROCKWALL, TEXAS

7950 ELMBROOK DRIVE SUITE250 DALLAS, TEXAS 75247 - 4951
(214) 638 0145 FAX (214) 638 0447
DALLAS /FORT WORTH /ARLINGTON /HOUSTON, TEXAS
FORTMEYERS, FLORIDA
Carter :: Burgess

REVISIONS

JOB NUMBER 962287010

DESIGNED JDR
DRAWN JRK
CHECKED JDR

ISSUE DATE January 10, 1997

SHEET NUMBER LP-1

Copyright ©1996 by Carter & Burgess, Inc.

(13)F:\LPA\962287010\LPA\287sl01.dgn - LOG:(TB1) - DGN:I-36,76,50,54,56 - USER:TJHOUK - JOB:(LANDSCAPE) PLOTTED Wed Mar 5 13:53:39 1997
TBL:(F:\LPLT-TBL\CBDALL.TBL
(13)F:\LPA\962287010\LPA\287sl01.dgn - LOG:(LP1) - DGN:I-6,18-25,45-56,59-63 - SCALE:30.000100
(11)F:\LPA\962287010\LPA\287sl05.dgn - LOG:(MTSLA1) - DGN:1,2,4,5,10-13,17-26,35-45,65-71,75-76,59-63
DGN:d:\pw\962287010\p\o\287sl01.dgn - DGN:I-63